Tazewell County Highway Department

AUTHORIZATION TO BID FORM

Addenda will be published to our Bid Letting page in the same manner as the plans and specifications. It is the sole responsibility of the plan holders to periodically check the website for plan addenda.

ALL BIDDERS PLANNING TO PLACE A BID MUST FILL OUT THIS FORM TO BE AUTHORIZED TO BID.

- This form must be completed, signed and either faxed to (309) 925-5533 or emailed to jsciortino@tazewell-il.gov.
- Failure to submit this completed form will result in the bid not being accepted.
- Contractors may verify we have received their Authorization to Bid form by checking the **Plan Holders List** found under the corresponding letting date.
- If an email address is provided, a Notice of Addenda will be sent when updates are available.
- Bid results are typically posted by noon on the day of the letting and are preliminary until approved by the County Board on the last Wednesday of the month.

Company Name:	
Address:	
Phone:	
Fax:	
Email:	
Bid Letting Date:	

Projects Intending to Bid on:

Section Number:	Description:

Tazewell County Highway Department 21308 Illinois Route 9 Tremont, IL 61568 p: (309) 925-5532 • f: (309) 925-5533 • jsciortino@tazewell-il.gov



Local Public Agency Formal Contract Proposal

COVER	SHEET		
Proposal Submitted By: Contractor's Name			
Contractor's Address	City	State Zip Code	
STATE OF ILLINOIS			
Local Public Agency	County	Section Number	
Tremont Road District	Tazewel	23-18000-01-GM	
Route(s) (Street/Road Name)		Type of Funds	
FAS 476 Baer Road		Township MFT & RBI Funds	
Submitted/Approved For Local Public Agency:			
For a County and Road District Project	F	or a Municipal Project	
Submitted/Approved	Submitted/Approved/Passed		
Highway Commissioner Signature & Date	Signature & Date		
Larry Bolliger Date: 2023.02.27 11:07:16 -06'00'		10	
Submitted/Approved	Official Title		
County Engineer/Superintendent of Highways Signature & Date			
Dan Parr Date: 2023.02.27 11:07:36 -06'00'		artment of Transportation	
	Regional Engineer		
		Jarmet 0.31373	

Note: All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed.

Local Public Agency	County	Section Number	Route(s) (St	reet/Road Name)
Tremont Road District	Tazewell	23-18000-01-GM	FAS 476 E	Baer Road
	NOTIC	E TO BIDDERS		
sealed proposals for the project de	escribed below will be receive	d at the office of the Tazewe	ll County Engir	neer
21308 Illinois Route 9	Tremont, Illinois (Name of O _{until} 1:30 PM	_{ffice} on 04/13/23
	Address		Time	Date
Sealed proposals will be opened a	nd read publicly at the office	_{of} the Tazewell County Er	gineer	
21308 Illinois Route 9	Tremont, Illinois (51568	Name of Office at 1:30 PM	_{on} 04/13/23
	Address			Date
	DESCR	IPTION OF WORK		
ocation				Project Length
FAS 476 Baer Road				1,855 LF
Fazewell County Engineer				
1. Plans and proposal forms will be	e available in the office of			
21308 Illinois Route 9				
Tremont, Illinois 61568				
. 🛛 Prequalification				
triplicate, showing all uncompl	eted contracts awarded to the	hin 24 hours after the letting an em and all low bids pending aw ing Authority and two originals v	ard for Federal, S	ate, County, Municipal
 The Awarding Authority reserve Provision for Bidding Requirer 		alities and to reject any or all pro tract Proposals.	oposals as provide	d in BLRS Special
 4. The following BLR Forms shall be returned by the bidder to the Awarding Authority: a. Local Public Agency Formal Contract Proposal (BLR 12200) b. Schedule of Prices (BLR 12201) c. Proposal Bid Bond (BLR 12230) (if applicable) 				
		t use for project with Federal fu		.)
will be made only for the actua	al quantities of work performe	Ite and are prepared for the cor d and accepted or materials fur e furnished may be increased, o	nished according	to the contract. The
for the performance of work. T	he bidder will be responsible arding Authority will, in no cas	ranty the bidder has examined for all errors in the proposal re- se, be responsible for any costs ne bidder.	sulting from failure	or neglect to conduct
The bidder shall take no advar	ntage of any error or omission	in the proposal and advertised	l contract	

- 7. The bidder shall take no advantage of any error or omission in the proposal and advertised contract.
- 8. If a special envelope is supplied by the Awarding Authority, each proposal should be submitted in that envelope furnished by the Awarding Agency and the blank spaces on the envelope shall be filled in correctly to clearly indicate its contents. When an envelope other than the special one furnished by the Awarding Authority is used, it shall be marked to clearly indicate its contents. When sent by mail, the sealed proposal shall be addressed to the Awarding Authority at the address and in care of the official in whose office the bids are to be received. All proposals shall be filed prior to the time and at the place specified in the Notice to Bidders. Proposals received after the time specified will be returned to the bidder unopened.
- 9. Permission will be given to a bidder to withdraw a proposal if the bidder makes the request in writing or in person before the time for opening proposals.

Local Public Agency County Section Number				Route(s) (Street/Road N	lame)
Tr	Tremont Road District Tazewell		23-18000-01-GM	FAS 476 Baer Road	ł
			PROPOSAL		
1.	Proposal of				
	· · · · · · · · · · · · · · · · · · ·		Contractor's Name		
		Cc	ontractor's Address		
2.		· · · · · <u> </u>	e Tazewell County Highway	Department	
	and approved by the Department	of Transportation on Ma	ar 13, 2023		·
3.		ge Construction" and the	by the Department of Transportation " Supplemental Specifications and		
4.	The undersigned agrees to accept Recurring Special Provisions" co		, the applicable Special Provisions	indicated on the "Check Sh	eet for
5.	The undersigned agrees to comp is granted in accordance with the		working days or by 09	/01/23 unless a	additional time
6.		d is not required, the prop cute a contract and contra	ract <u>Will</u> be required to de bosal guaranty check will be held ir act bond as required, it is hereby a		l is accepted
7.	7. Each pay item should have a unit price and a total price. If no total price is shown or if there is a discrepancy between the products o the unit price multiplied by the quantity, the unit price shall govern. If a unit price is omitted, the total price will be divided by the quantity in order to establish a unit price. A bid may be declared unacceptable if neither a unit price nor a total price is shown.				
8.	8. The undersigned submits herewith the schedule of prices on BLR 12201 covering the work to be performed under this contract.				
9.	9. The undersigned further agrees that if awarded the contract for the sections contained in the combinations on BLR 12201, the work shall be in accordance with the requirements of each individual proposal for the multiple bid specified in the Schedule for Multiple Bids below.				
10.	A proposal guaranty in the prope	er amount, as specified ir	n BLRS Special Provision for Biddii	ng Requirements and Condi	tions for
	Contract Proposals, will be required. Bid Bonds <u>Will</u> be allowed as a proposal guaranty. Accompanying this proposal is either a bid bond, if allowed, on Department form BLR 12230 or a proposal guaranty check, complying with the specifications, made payable				
	to: County Treasurer of Tazewell County .				
				()
Γ		Attach Cashior's	Check or Certified Check Here		
		Allach Cashiel S	Oneck of Certined Check Hele		

In the event that one proposal guaranty check is intended to cover two or more bid proposals, the amount must be equal to the sum of the proposal guaranties which would be required for each individual bid proposal. If the proposal guaranty check is placed in another bid proposal, state below where it may be found.

The proposal guaranty check will be found in the bid proposal for: Section Number ______.

Local Public Agency	County	Section Number	Route(s) (Street/Road Name)
Tremont Road District	Tazewell	23-18000-01-GM	FAS 476 Baer Road

CONTRACTOR CERTIFICATIONS

The certifications hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder.

- 1. **Debt Delinquency.** The bidder or contractor or subcontractor, respectively, certifies that it is not delinquent in the payment of any tax administered by the Department of Revenue unless the individual or other entity is contesting, in accordance with the procedure established by the appropriate Revenue Act, its liability for the tax or the amount of the tax. Making a false statement voids the contract and allows the Department to recover all amounts paid to the individual or entity under the contract in a civil action.
- 2. **Bid-Rigging or Bid Rotating**. The bidder or contractor or subcontractor, respectively, certifies that it is not barred from contracting with the Department by reason of a violation of either 720 ILCS 5/33E-3 or 720 ILCS 5/33E-4.

A violation of section 33E-3 would be represented by a conviction of the crime of bid-rigging which, in addition to Class 3 felony sentencing, provides that any person convicted of this offense, or any similar offense of any state or the United States which contains the same elements as this offense shall be barred for 5 years from the date of conviction from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent on behalf of the corporation.

A violation of Section 33E-4 would be represented by a conviction of the crime of bid-rotating which, in addition to Class 2 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be permanently barred from contracting with any unit of State of Local government. No corporation shall be barred from contracting with any unit of State or Local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent on behalf of the corporation.

- 3. **Bribery.** The bidder or contractor or subcontractor, respectively, certifies that, it has not been convicted of bribery or attempting to bribe an officer or employee of the State of Illinois or any unit of local government, nor has the firm made an admission of guilt of such conduct which is a matter or record, nor has an official, agent, or employee of the firm committed bribery or attempted bribery on behalf of the firm and pursuant to the direction or authorization of a responsible official of the firm.
- 4. **Interim Suspension or Suspension.** The bidder or contractor or subcontractor, respectively, certifies that it is not currently under a suspension as defined in Subpart I of Title 44 Subtitle A Chapter III Part 6 of the Illinois Administrative code. Furthermore, if suspended prior to completion of this work, the contract or contracts executed for the completion of this work may be canceled.

Local Public Agency	County	Section Number	Route(s) (Street	/Road Name)
Tremont Road District	Tazewell	23-18000-01-GM	FAS 476 Bae	er Road
	SIGN	ATURES	, [
(If an individual)		Bidder Signature & Date		
	E E E E E E E E E E E E E E E E E E E	Business Address		
	(City	State	Zip Code
	F	Firm Name		
(If a partnership)				
		Signature & Date		
	-	Title		
	E	Business Address		
	(City	State	Zip Code
Insert the Names and Addresses of all P	artners			
(If a comparation)	(Corporate Name		
(If a corporation)	ſ			
	Ĺ	Signature & Date		
		v		
	-	Fitle		
		Business Address		
	(City	State	Zip Code
Insert	Names of Officers	President		

Secretary

Attest:

Treasurer

Secretary





Contractor's Name

Contractor's Address	City		Stat	e Zip Code	
Local Public Agency		County	Section I	Number	
Tremont Road District		Tazewell	23-180	00-01-GM	
Route(s) (Street/Road Name)					
FAS 476 Baer Road					

Schedule for Multiple Bids

Combination Letter	Section Included in Combinations	Total

Schedule for Single Bid

(For complete information covering these items, see plans and specifications.)

Item Number	Items	Unit	Quantity	Unit Price	Total
1	HMA SURF REM BUTT JT	SQ YD	297		
2	TEMPORARY RAMP	SQ YD	20		
3	P BIT MATLS TACK CT	POUND	3,414		
4	HMA SC IL-9.5 C N50	TON	531		
5	INCIDENTAL HMA SURF	TON	22		
6	AGGREGATE SHLDS B SPL	TON	148		
7	SHORT TERM PAVT MKING	FOOT	186		
8	SHRT TRM PAVT MK REM	SQ FT	62		
9	TRAF CONT & PROT SPL	L SUM	1		
<u></u>			Bi	dder's Total Proposal	

- 1. Each pay item should have a unit price and a total price.
- 2. If no total price is shown or if there is a discrepancy between the product of the unit price multiplied by the quantity, the unit price shall govern.
- 3. If a unit price is omitted, the total price will be divided by the quantity in order to establish a unit price.
- 4. A bid may be declared unacceptable if neither a unit price or total price is shown.



Local Public Agency **Proposal Bid Bond**

Local Public Agency	County	Section Number
Tremont Road District	Tazewell	23-18000-01-GM
WE,		as PRINCIPAL and

as SURETY, are held jointly,

severally and firmly bound unto the above Local Public Agency (hereafter referred to as "LPA") in the penal sum of 5% of the total bid price, or for the amount specified in the proposal documents in effect on the date of invitation for bids, whichever is the lesser sum. We bind ourselves, our heirs, executors, administrators, successors, and assigns, jointly pay to the LPA this sum under the conditions of this instrument.

WHEREAS THE CONDITION OF THE FOREGOING OBLIGATION IS SUCH that, the said PRINCIPAL is submitting a written proposal to the LPA acting through its awarding authority for the construction of the work designated as the above section.

THEREFORE if the proposal is accepted and a contract awarded to the PRINCIPAL by the LPA for the above designated section and the PRINCIPAL shall within fifteen (15) days after award enter into a formal contract, furnish surety guaranteeing the faithful performance of the work, and furnish evidence of the required insurance coverage, all as provided in the "Standard Specifications for Road and Bridge Construction" and applicable Supplemental Specifications, then this obligation shall become void; otherwise it shall remain in full force and effect.

IN THE EVENT the LPA determines the PRINCIPAL has failed to enter into a formal contract in compliance with any requirements set forth in the preceding paragraph, then the LPA acting through its awarding authority shall immediately be entitled to recover the full penal sum set out above, together with all court costs, all attorney fees, and any other expense of recovery.

IN TESTIMONY WHEREOF, the said PRINCIPAL and the said SURETY have caused this instrument to be signed by their respective officers this of

Day Mont	h and Year
Company Name	Principal Company Name
Signature & Date	Signature & Date
By:	By:
Title	Title
	ors, the company names, and authorized signatures of each contractor must be
affixed.)	Surety
Name of Surety	Signature of Attorney-in-Fact Signature & Date
	By:
STATE OF IL	
COUNTY OF	
l	, a Notary Public in and for said county do hereby certify that
(Insert names of i	ndividuals signing on behalf of PRINCIPAL & SURETY)
	e persons whose names are subscribed to the foregoing instrument on behalf of day in person and acknowledged respectively, that they signed and delivered said es and purposes therein set forth.
Given under my hand and notarial seal this	day of DayMonth and Year
	Notary Public Signature & Date
(SEAL, if required by the LPA)	
	Date commission expires

Local Public Agency	County	Section Number
Tremont Road District	Tazewell	23-18000-01-GM

ELECTRONIC BID BOND

Electronic bid bond is allowed (box must be checked by LPA if electronic bid bond is allowed)

The Principal may submit an electronic bid bond, in lieu of completing the above section of the Proposal Bid Bond Form. By providing an electronic bid bond ID code and signing below, the Principal is ensuring the identified electronic bid bond has been executed and the Principal and Surety are firmly bound unto the LPA under the conditions of the bid bond as shown above. (If PRINCIPAL is a joint venture of two or more contractors, an electronic bid bond ID code, company/Bidder name title and date must be affixed for each contractor in the venture.)

Electronic Bid Bond ID Code

Company/Bidder Name

Signature & Date

Title





For the Letting of

Bureau of Construction 2300 South Dirksen Parkway/Room 322 Springfield, IL 62764 Instructions: Complete this form by either typing or using black ink. "Authorization to Bid" will not be issued unless both sides of this form are completed in detail. Use additional forms as needed to list all work.

Part I. Work Under Contract

List below all work you have under contract as either a prime contractor or a subcontractor. It is required to include all pending low bids not yet awarded or rejected. In a joint venture, list only that portion of the work which is the responsibility of your company. The uncompleted dollar value is to be based upon the most recent engineer's or owners estimate, and must include work subcontracted to others. If no work is contracted, show NONE.

	1	2	3	4	Awards Pending	Accumulated Totals
Contract Number						
Contract With						
Estimated Completion Date						
Total Contract Price						
Uncompleted Dollar Value if Firm is the Prime Contractor						
Uncompleted Dollar Value if Firm is the Subcontractor						
Total Value of All Work						

Part II. Awards Pending and Uncompleted Work to be done with your own forces.

List below the uncompleted dollar value of work for each contract and awards pending to be completed with your own forces. All work subcontracted to others will be listed on the reverse of this form. In a joint venture, list only that portion of the work to be done by your company. If no work is contracted, show NONE.

· · · ·			
Earthwork			
Portland Cement Concrete Paving			
HMA Plant Mix			
HMA Paving			
Clean & Seal Cracks/Joints			
Aggregate Bases, Surfaces			
Highway, R.R., Waterway Struc.			
Drainage			
Electrical			
Cover and Seal Coats			
Concrete Construction			
Landscaping			
Fencing			
Guardrail			
Painting			
Signing			
Cold Milling, Planning, Rotomilling			
Demolition			
Pavement Markings (Paint)			
Other Construction (List)			
Totals			

Disclosure of this information is REQUIRED to accomplish the statutory purpose as outlined in the "Illinois Procurement Code." Failure to comply will result in non-issuance of an "Authorization To Bid." This form has been approved by the State Forms Management Center.

Part III. Work Subcontracted to Others.

For each contract described in Part I, list all the work you have subcontracted to others.

	1	2	3	4	Awards Pending
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					

Total Uncompleted

Notary

I, being duly sworn, do hereby declare this affidavit is a true and correct statement relating to ALL uncompleted contracts of the undersigned for Federal, State, County, City and private work, including ALL subcontract work, ALL pending low bids not yet awarded or rejected and ALL estimated completion dates.

Officer or Director	
Title	
Signature	Date
Company	
Address	
City	State Zip Code

Subscribed and sworn to before me this day of,
(Signature of Notary Public) My commission expires
(Notary Seal)

Add pages for additional contracts



Apprenticeship and Training Program Certification

Local Public Agency	County	Street Name/Road Name	Section Number
Tremont Road District	Tazewell	FAS 476 Baer Road	23-18000-01-GM

All contractors are required to complete the following certification

For this contract proposal or for all bidding groups in this deliver and install proposal.

For the following deliver and install bidding groups in this material proposal.

Illinois Department of Transportation policy, adopted in accordance with the provisions of the Illinois Highway Code, requires this contract to be awarded to the lowest responsive and responsible bidder. The award decision is subject to approval by the Department. In addition to all other responsibility factors, this contract or deliver and install proposal requires all bidders and all bidder's subcontractors to disclose participation in apprenticeship or training programs that are (1) approved by and registered with the United States Department of Labor's Bureau of Apprenticeship and Training, and (2) applicable to the work of the above indicated proposals or groups. Therefore, all bidders are required to complete the following certification:

1. Except as provided in paragraph 4 below, the undersigned bidder certifies that it is a participant, either as an individual or as part of a group program, in an approved apprenticeship or training program applicable to each type of work or craft that the bidder will perform with its own employees.

2. The undersigned bidder further certifies, for work to be performed by subcontract, that each of its subcontractors either (A) is, at the time of such bid, participating in an approved, applicable apprenticeship or training program; or (B) will, prior to commencement of performance of work pursuant to this contract, establish participation in an approved apprenticeship or training program applicable to the work of the subcontract.

3. The undersigned bidder, by inclusion in the list in the space below, certifies the official name of each program sponsor holding the Certificate of Registration for all of the types of work or crafts in which the bidder is a participant and that will be performed with the bidder's employees. Types of work or craft that will be subcontracted shall be included and listed as subcontract work. The list shall also indicate any type of work or craft job category for which there is no applicable apprenticeship or training program available.

4. Except for any work identified above, if any bidder or subcontractor shall perform all or part of the work of the contract or deliver and install proposal solely by individual owners, partners or members and not by employees to whom the payment of prevailing rates of wages would be required, check the following box, and identify the owner/operator workforces and positions of ownership.

The requirements of this certification and disclosure are a material part of the contract, and the contractor shall require this certification provision to be included in all approved subcontracts. The bidder is responsible for making a complete report and shall make certain that each type of work or craft job category that will be utilized on the project is accounted for and listed. The Department at any time before or afterward may require the production of a copy of each applicable Certificate of Registration issued by the United States Department of Labor evidencing such participation by the contractor and any or all of its subcontractors. In order to fulfill the participation requirement, it shall not be necessary that any applicable program sponsor be currently taking or that it will take applications for apprenticeship, training or employment during the performance of the work of this contract or deliver and install proposal.

Bidder		Signature & Date	
Title			
Address	City		State Zip Code



Affidavit of Illinois Business Office

Local Public Agency	County		Street Name/Road Name	Section Number	
Tremont Road District	Tazewell	F	AS 476 Baer Road	23-18000-01-GM	
1	of				
Name of Affiant	0		City of Affiant	,State of Affiant	_ '
being first duly sworn upon oath, state as follows:					
4 That I are the	-6				
1. That I am theOfficer or Position	of		Bidder	·	
2. That I have personal knowledge of the facts her	rein stated.		Diddei		
3. That, if selected under the proposal described a	above,		Distant	, will maintain a business office in	n the
State of Illinois, which will be located in		County,	Bidder		
	County	County,	initiois.		
4. That this business office will serve as the prima this proposal.	ry place of emp	oloyment fo	r any persons employed	in the construction contemplated b	у
5. That this Affidavit is given as a requirement of s	state law as pro	vided in Se		ois Procurement Code.	
			Signature & Date		
			Print Name of Affiant		
			<u></u>		
Notary Public					
-					
State of IL					
County					
Signed (or subscribed or attested) before me on	(1)	by			
	(date)				
(nom	ala of porcepta)			, authorized agent(s) o	f
(nam	e/s of person/s)				
 Bidder					
Biddei					
			Notary Public 9	Signature & Date	
(SEAL)			My commission	expires	

INDEX FOR SUPPLEMENTAL SPECIFICATIONS AND RECURRING SPECIAL PROVISIONS

Adopted January 1, 2023

This index contains a listing of SUPPLEMENTAL SPECIFICATIONS and frequently used RECURRING SPECIAL PROVISIONS.

ERRATA Standard Specifications for Road and Bridge Construction

(Adopted 1-1-22) (Revised 1-1-23)

SUPPLEMENTAL SPECIFICATIONS

Std. Spe	ec. Sec.	Page No.
202	Earth and Rock Excavation	1
204	Borrow and Furnished Excavation	2
207	Porous Granular Embankment	3
211	Topsoil and Compost	
407	Hot-Mix Asphalt Pavement (Full-Depth)	5
420	Portland Cement Concrete Pavement	6
502	Excavation for Structures	7
509	Metal Railings	8
540	Box Culverts	9
542	Pipe Culverts	
586	Granular Backfill for Structures	34
644	High Tension Cable Median Barrier	35
782	Reflectors	36
801	Electrical Requirements	38
821	Roadway Luminaires	40
1003	Fine Aggregates	41
1004	Coarse Aggregates	42
1020	Portland Cement Concrete	43
1030	Hot-Mix Asphalt	44
1067	Luminaire	45
1097	Reflectors	52



Check Sheet for Recurring Special Provisions

Local Public Agency	County	Section Number
Tremont Road District	Tazewell	23-18000-01-GM

Check this box for lettings prior to 01/01/2023.

The Following Recurring Special Provisions Indicated By An "X" Are Applicable To This Contract And Are Included By Reference:

Che	eck Sheet #		<u>Page No</u>
1		Additional State Requirements for Federal-Aid Construction Contracts	53
2		Subletting of Contracts (Federal-Aid Contracts)	56
3		EEO	57
4		Specific EEO Responsibilities Non Federal-Aid Contracts	67
5		Required Provisions - State Contracts	72
6		Asbestos Bearing Pad Removal	78
7		Asbestos Waterproofing Membrane and Asbestos HMA Surface Removal	79
8		Temporary Stream Crossings and In-Stream Work Pads	80
9		Construction Layout Stakes	81
10		Use of Geotextile Fabric for Railroad Crossing	84
11		Subsealing of Concrete Pavements	86
12		Hot-Mix Asphalt Surface Correction	90
13		Pavement and Shoulder Resurfacing	92
14		Patching with Hot-Mix Asphalt Overlay Removal	93
15		Polymer Concrete	95
16		Reserved	97
17		Bicycle Racks	98
18		Temporary Portable Bridge Traffic Signals	100
19		Nighttime Inspection of Roadway Lighting	102
20		English Substitution of Metric Bolts	103
21		Calcium Chloride Accelerator for Portland Cement Concrete	104
22		Quality Control of Concrete Mixtures at the Plant	105
23		Quality Control/Quality Assurance of Concrete Mixtures	113
24		Reserved	129
25		Reserved	130
26		Temporary Raised Pavement Markers	131
27		Restoring Bridge Approach Pavements Using High-Density Foam	132
28		Portland Cement Concrete Inlay or Overlay	135
29		Portland Cement Concrete Partial Depth Hot-Mix Asphalt Patching	139
30		Longitudinal Joint and Crack Patching	142
31		Concrete Mix Design - Department Provided	144
32		Station Numbers in Pavements or Overlays	145

Recurring Special Provisions

Local Public Agency	County	Section Number	
Tremont Road District	Tazewell	23-18000-01-GM	

The Following Local Roads And Streets Recurring Special Provisions Indicated By An "X" Are Applicable To This Contract And Are Included By Reference:

Local Roads And Streets Recurring Special Provisions

Check Sheet # Page No.				
LRS 1		Reserved	147	
LRS 2		Furnished Excavation	148	
LRS 3	\boxtimes	Work Zone Traffic Control Surveillance	149	
LRS 4	\boxtimes	Flaggers in Work Zones	150	
LRS 5	\boxtimes	Contract Claims	151	
LRS 6	\boxtimes	Bidding Requirements and Conditions for Contract Proposals	152	
LRS 7		Bidding Requirements and Conditions for Material Proposals	158	
LRS 8		Reserved	164	
LRS 9		Bituminous Surface Treatments	165	
LRS 10		Reserved	169	
LRS 11	\boxtimes	Employment Practices	170	
LRS 12	\boxtimes	Wages of Employees on Public Works	172	
LRS 13	\boxtimes	Selection of Labor	174	
LRS 14		Paving Brick and Concrete Paver Pavements and Sidewalks	175	
LRS 15	\boxtimes	Partial Payments	178	
LRS 16		Protests on Local Lettings	179	
LRS 17	\boxtimes	Substance Abuse Prevention Program	180	
LRS 18		Multigrade Cold Mix Asphalt	181	
LRS 19		Reflective Crack Control Treatment	182	

TABLE OF CONTENTS

Page 1	Bidding Requirements and Conditions Description of Work Traffic Traffic Control Plan Short Term Pavement Marking
Page 2	Substitution of Bituminous Mixtures Hot-Mix Asphalt Surface Removal- Butt Joint
	Incidental Hot-Mix Asphalt Surfacing
	Aggregate Shoulders, Type B (Special)
Page 3	Weight Limits
	General Notes
	Pre-Construction Meeting
	Time Schedule
	Wages of Employees on Public Works
Page 4-5	BDE Special Provisions Check Sheets
Page 6-16	BDE Special Provisions
Page 17-23	LR Special Provisions
Page 24	Project Location Map
Page 25-26	Quantity Sheets
Page 27	Typical Cross Section
Page 28	Standard for HMA Surfacing at Sideroads, Entrances & Mailboxes
Page 29-31	Butt Joints
Page 32-39	Traffic Control Standards





Local Public Agency	County	Section Number	
Tremont R.D.	Tazewell	23-18000-01-GM	

The following Special Provision supplement the "Standard Specifications for Road and Bridge Construction", adopted

January 1, 2022

, the latest edition of the "Manual on Uniform Traffic Control Devices for

Streets and Highways", and the "Manual of Test Procedures of Materials" in effect on the date of invitation of bids, and the Supplemental Specification and Recurring Special Provisions indicated on the Check Sheet included here in which apply to and govern the construction of the above named section, and in case of conflict with any parts, or parts of said Specifications, the said Special Provisions shall take precedence and shall govern.

<u>BIDDING REQUIREMENTS AND CONDITIONS</u>: Prequalification of bidders with the Illinois Department of Transportation is required.

DESCRIPTION OF WORK: The work of this section consists of Hot-Mix Asphalt Surface Removal- Butt Joint, Hot-Mix Asphalt Surface Course, IL-9.5, Mix "C", N50 over an existing bituminous surface, Aggregate Shoulders, Type B (Special) and related work.

TRAFFIC: FAS 476 Baer Road shall remain open for both local and through traffic at all times. The Tremont Township Highway Commissioner shall be notified a minimum 48 hours in advance of the start of construction to properly notify the property owners along the construction improvement route.

TRAFFIC CONTROL PLAN: Traffic Control shall be in accordance with the applicable sections of the "Standard Specifications for Road and Bridge Construction", the applicable guidelines contained in the "Manual on Uniform Traffic Control Devices for Streets and Highways", these Special Provisions, and any special details and Highway Standards contained herein and in the plans.

Special attention is called to Articles 107.09 and 107.14 of the "Standard Specifications for Road and Bridge Construction" and the Traffic Control Standards 701006-05, 701011-04, 701201-05, 701301-04, 701306-04 and 701901-08 contained herein.

The presence of temporary traffic control drawings or standards in the proposal or contract, whether a pay item or not, does not relieve the Contractor of his obligation to the public. The Contractor shall provide, if conditions warrant by the Engineer, all protection deemed necessary beyond that shown in the proposal or Special Provisions.

"NO PASSING ZONES NOT STRIPED NEXT____ MILES" signs shall be posted in accordance with Article 701.17.

Construction signs shall meet the current Standard Specifications for Traffic Control Items.

Basis of payment: All required Traffic Control shall be paid for at the contract-lump sum price for TRAFFIC CONTROL & PROTECTION, (SPECIAL).

SHORT TERM PAVEMENT MARKING: Section 703 of the Standard Specifications shall apply with the following changes and stipulations:

Permanent pavement markings will be applied by others, therefore the Contractor will not be responsible for replacing short - term markings with temporary or permanent pavement markings. The Contractor will be responsible for maintaining short term markings for 30 days or until permanent pavement markings are applied whichever is first.

Article 703.02 Materials. Material shall be pavement marking tape as specified.

Local Public Agency	County	Section Number
Tremont R.D.	Tazewell	23-18000-01-GM

Revise Article 703.07 to read: Basis of Payment. This work will be paid for at the contract unit price per foot for SHORT TERM PAVEMENT MARKING.

Removal of short term pavement markings will be paid for at the contract unit price per square foot for SHORT TERM PAVEMENT MARKING REMOVAL.

SUBSTITUTION OF BITUMINOUS MIXTURES: Bituminous Mixtures of a higher quality may be substituted for the designs specified at the approval of the Engineer. The contractor shall provide the Engineer with an approved mix design at least 24 hours prior to its use for his review. Use of the proposed substitute mix shall be solely at the discretion of the Engineer. The new mixture will be measured and paid for under the same applicable articles as the mixture for which it is substituted.

HOT-MIX ASPHALT SURFACE REMOVAL- BUTT JOINT:

The surface removal shall be performed according to Article 406.08 and Section 440.

Revise Article 440.06 Disposal of Material to read as follows: All milled material shall remain the property of the Tremont Township Road District and shall be transported from the job site to the Tremont Township Road District storage yard located near 13535 Baer Road next to J & J Cranes in Tremont, Illinois. Other sites may be determined by mutual agreement between the Contractor and the Road District. If other sites are approved, the Contractor will be responsible for preventing theft of milled material or unauthorized removal of said material from sites other than Tremont Township Road District property.

Add the following to Article 440.08 Basis of Payment: Hauling of milled material shall be included in the cost of HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT and no extra compensation will be allowed.

INCIDENTAL HOT-MIX ASPHALT SURFACING: Any preparation required prior to construction of INCIDENTAL HOT-MIX ASPHALT SURFACING will not be measured separately but shall be included in the contract unit price per ton for INCIDENTAL HOT-MIX ASPHALT SURFACING. To prevent damage to newly constructed bituminous surfaces, it is understood that an interval of up to one week shall lapse before incidental hot-mix asphalt surfacing operations begin, depending on weather and curing conditions, as directed by the Engineer.

AGGREGATE SHOULDERS, TYPE B (SPECIAL): This work shall be constructed in accordance with Article 481 of the Standard Specifications with the following exceptions and additions:

Revise Note 1 of Article 481.02 to the following: Note 1. Reclaimed asphalt pavement (RAP) may be used as AGGREGATE SHOULDERS, TYPE B (SPECIAL).

This work will include entrance radii and transitions to existing aggregate and earth entrances. Material placed at entrances shall be of the same type and gradation as the existing entrance except in the case of earth field entrances where a transition of aggregate shall be placed to provide safe entrance to the bituminous roadway.

Areas that are not accessible by mechanical spreader during normal shoulder operations will be constructed by handwork as necessary by any method that provides a usable surface and has a uniform and neat appearance and shall be compacted by a means approved by the Engineer.

No extra compensation will be allowed for handwork required to complete shoulders along roadway, entrances, or at driveway transitions.

Local Public Agency	County	Section Number
Tremont R.D.	Tazewell	23-18000-01-GM

To prevent damage to newly constructed bituminous surfaces, it is understood that an interval of up to two weeks shall lapse before shoulder operations begin, depending on weather and curing conditions.

Revise Article 481.10 to read: Basis of Payment. This work will be paid for at the contract unit price per on for AGGREGATE SHOULDERS, TYPE B (SPECIAL).

WEIGHT LIMITS: Legal weight limits shall be observed on Tremont Road District roads and structures they contain at all times.

<u>GENERAL NOTES</u>: Where section or subsection monuments are encountered, the Engineer shall be notified before such monuments are removed. The Contractor shall protect and carefully preserve all property markers and monuments until the owner, and authorized surveyor or agent has witnessed or otherwise referenced their location.

<u>PRE-CONSTRUCTION MEETING</u>: A pre-construction meeting for this Section is required between the Contractor, Highway Commissioner and the Resident Engineer.

TIME SCHEDULE: The specified completion date for this project is September 1, 2023.

WAGES OF EMPLOYEES ON PUBLIC WORKS: Add the following to paragraph #1 of the Special Provision for Wages of Employees on Public Works, Check Sheet LRS#12: Prevailing wage rates may be obtained from the IDOL (Illinois Department of Labor) website at:

https://www2.illinois.gov/idol/Laws-Rules/CONMED/Pages/Rates.aspx

BDE SPECIAL PROVISIONS For the April 28, 2023 and June 16, 2023 Lettings

The following special provisions indicated by a "check mark" are applicable to this contract and will be included by the Project Coordination and Implementation Section of the Bureau of Design & Environment (BDE).

Fi	e Name	#		Special Provision Title	Effective	Revised
	80099			Accessible Pedestrian Signals (APS)	April 1, 2003	Jan. 1, 2022
	80274	2	\Box	Aggregate Subgrade Improvement	April 1, 2012	April 1, 2022
	80192	3		Automated Flagger Assistance Devices	Jan. 1, 2008	April 1, 2023
	80173	4	\Box	Bituminous Materials Cost Adjustments	Nov. 2, 2006	Aug. 1, 2017
	80426	5		Bituminous Surface Treatment with Fog Seal	Jan. 1, 2020	Jan. 1, 2022
	80436	6		Blended Finely Divided Minerals	April 1, 2021	
*	80241	7		Bridge Demolition Debris	July 1, 2009	
*	5053I	8		Building Removal	Sept. 1, 1990	Aug. 1, 2022
*	5026I	9		Building Removal with Asbestos Abatement	Sept. 1, 1990	Aug. 1, 2022
	80384	10	\checkmark	Compensable Delay Costs	June 2, 2017	April 1, 2019
*	80198	11		Completion Date (via calendar days)	April 1, 2008	
*	80199	12		Completion Date (via calendar days) Plus Working Days	April 1, 2008	
	80261	13		Construction Air Quality – Diesel Retrofit	June 1, 2010	Nov. 1, 2014
	80434	14		Corrugated Plastic Pipe (Culvert and Storm Sewer)	Jan. 1, 2021	
*	80029	15		Disadvantaged Business Enterprise Participation	Sept. 1, 2000	Mar. 2, 2019
	80229	16		Fuel Cost Adjustment	April 1, 2009	Aug. 1, 2017
	80447	17		Grading and Shaping Ditches	Jan. 1, 2023	
	80433	18		Green Preformed Thermoplastic Pavement Markings	Jan. 1, 2021	Jan. 1, 2022
		19		High Tension Cable Median Barrier Removal	April 1, 2022	
	80446			Hot-Mix Asphalt - Longitudinal Joint Sealant	Nov. 1, 2022	
	80438			Illinois Works Apprenticeship Initiative – State Funded Contracts	June 2, 2021	Sept. 2, 2021
	80045			Material Transfer Device	June 15, 1999	Jan. 1, 2022
			\checkmark	Performance Graded Asphalt Binder	Jan. 1, 2023	
*		24		Railroad Protective Liability Insurance	Dec. 1, 1986	Jan. 1, 2022
	80445			Seeding	Nov. 1, 2022	
	80448			Source of Supply and Quality Requirements	Jan. 2, 2023	
	80340			Speed Display Trailer	April 2, 2014	Jan. 1, 2022
	80127		Ц	Steel Cost Adjustment	April 2, 2004	Jan. 1, 2022
	80397			Subcontractor and DBE Payment Reporting	April 2, 2018	
	80391		\checkmark	Subcontractor Mobilization Payments	Nov. 2, 2017	April 1, 2019
	80437		Ц	Submission of Payroll Records	April 1, 2021	Nov. 1, 2022
	80435		Ц	Surface Testing of Pavements – IRI	Jan. 1, 2021	Jan. 1, 2023
	80410			Traffic Spotters	Jan. 1, 2019	
*	20338			Training Special Provisions	Oct. 15, 1975	Sept. 2, 2021
	80429		Ц	Ultra-Thin Bonded Wearing Course	April 1, 2020	Jan. 1, 2022
		36	\checkmark	Vehicle and Equipment Warning Lights	Nov. 1, 2021	Nov. 1, 2022
	80440		Ц	Waterproofing Membrane System	Nov. 1, 2021	
	80302			Weekly DBE Trucking Reports	June 2, 2012	Nov. 1, 2021
*		39		Work Zone Traffic Control Devices	Mar. 2, 2020	
*	80071	40		Working Days	Jan. 1, 2002	

Highlighted items indicate a new or revised special provision for the letting.

An * indicates the special provision requires additional information from the designer, which needs to be submitted separately. The Project Coordination and Implementation Section will then include the information in the applicable special provision.

The following special provisions have been deleted from use.

File Name	Special Provision Title	Effective Revised
50481	Building Removal-Case II (Non-Friable Asbestos)	Sept. 1, 1990 April 1, 2010
50491	Building Removal-Case III (Friable Asbestos)	Sept. 1, 1990 April 1, 2010

The following special provisions are in the 2023 Supplemental Specifications and Recurring Special Provisions.

File Name 80293	<u>Special Provision Title</u> Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ 5 Feet	<u>New Location(s)</u> Articles 540.04 & 540.06	<u>Effective</u> April 1, 2012	<u>Revised</u> July 1, 2016
80311	Concrete End Sections for Pipe Culverts	Articles 540.07, 542.01, 542.02, 542.07, 542.11 & 542.12	Jan. 1, 2013	April 1, 2016
80422	High Tension Cable Median Barrier	Articles 644.02, 644.05, 782.01, 782.04, 782.07 & 1097.02	Jan. 1, 2020	Jan. 1, 2022
80442	Hot-Mix Asphalt	Articles 1030.09 & 1030.10	Jan. 1, 2022	Aug. 1, 2022
80444	Hot-Mix Asphalt – Patching	Errata – Article 442.08(b)	April 1, 2022	-
80411	Luminaires, LED	Articles 801.05(a), 821.02(d), 821.03, 821.08 & 1067.01-1067.06	April 1, 2019	Jan. 1, 2022
80418	Mechanically Stabilized Earth Retaining Walls	Articles 1003.07 & 1004.06	Nov. 1, 2019	Nov. 1, 2020
80430	Portland Cement Concrete – Haul Time	Article 1020.11(a)(7)	July 1, 2020	
80395	Sloped Metal End Section for Pipe Culverts	Articles 540.07, 542.01, 542.02, 542.07, 542.11 & 542.12	Jan. 1, 2018	
80318	Traversable Pipe Grate for Concrete End Sections	Articles 540.04, 540.07, 540.08 & 542.01, 542.02, 542.07, 542.11 & 542.12	Jan. 1, 2013	Jan. 1, 2018

COMPENSABLE DELAY COSTS (BDE)

Effective: June 2, 2017 Revised: April 1, 2019

Revise Article 107.40(b) of the Standard Specifications to read:

- "(b) Compensation. Compensation will not be allowed for delays, inconveniences, or damages sustained by the Contractor from conflicts with facilities not meeting the above definition; or if a conflict with a utility in an unanticipated location does not cause a shutdown of the work or a documentable reduction in the rate of progress exceeding the limits set herein. The provisions of Article 104.03 notwithstanding, compensation for delays caused by a utility in an unanticipated location will be paid according to the provisions of this Article governing minor and major delays or reduced rate of production which are defined as follows.
 - (1) Minor Delay. A minor delay occurs when the work in conflict with the utility in an unanticipated location is completely stopped for more than two hours, but not to exceed two weeks.
 - (2) Major Delay. A major delay occurs when the work in conflict with the utility in an unanticipated location is completely stopped for more than two weeks.
 - (3) Reduced Rate of Production Delay. A reduced rate of production delay occurs when the rate of production on the work in conflict with the utility in an unanticipated location decreases by more than 25 percent and lasts longer than seven calendar days."

Revise Article 107.40(c) of the Standard Specifications to read:

- "(c) Payment. Payment for Minor, Major, and Reduced Rate of Production Delays will be made as follows.
 - (1) Minor Delay. Labor idled which cannot be used on other work will be paid for according to Article 109.04(b)(1) and (2) for the time between start of the delay and the minimum remaining hours in the work shift required by the prevailing practice in the area.

Equipment idled which cannot be used on other work, and which is authorized to standby on the project site by the Engineer, will be paid for according to Article 109.04(b)(4).

(2) Major Delay. Labor will be the same as for a minor delay.

Equipment will be the same as for a minor delay, except Contractor-owned equipment will be limited to two weeks plus the cost of move-out to either the

Contractor's yard or another job and the cost to re-mobilize, whichever is less. Rental equipment may be paid for longer than two weeks provided the Contractor presents adequate support to the Department (including lease agreement) to show retaining equipment on the job is the most economical course to follow and in the public interest.

(3) Reduced Rate of Production Delay. The Contractor will be compensated for the reduced productivity for labor and equipment time in excess of the 25 percent threshold for that portion of the delay in excess of seven calendar days. Determination of compensation will be in accordance with Article 104.02, except labor and material additives will not be permitted.

Payment for escalated material costs, escalated labor costs, extended project overhead, and extended traffic control will be determined according to Article 109.13."

Revise Article 108.04(b) of the Standard Specifications to read:

- "(b) No working day will be charged under the following conditions.
 - (1) When adverse weather prevents work on the controlling item.
 - (2) When job conditions due to recent weather prevent work on the controlling item.
 - (3) When conduct or lack of conduct by the Department or its consultants, representatives, officers, agents, or employees; delay by the Department in making the site available; or delay in furnishing any items required to be furnished to the Contractor by the Department prevents work on the controlling item.
 - (4) When delays caused by utility or railroad adjustments prevent work on the controlling item.
 - (5) When strikes, lock-outs, extraordinary delays in transportation, or inability to procure critical materials prevent work on the controlling item, as long as these delays are not due to any fault of the Contractor.
 - (6) When any condition over which the Contractor has no control prevents work on the controlling item."

Revise Article 109.09(f) of the Standard Specifications to read:

"(f) Basis of Payment. After resolution of a claim in favor of the Contractor, any adjustment in time required for the work will be made according to Section 108. Any adjustment in the costs to be paid will be made for direct labor, direct materials, direct equipment, direct jobsite overhead, direct offsite overhead, and other direct costs allowed by the resolution. Adjustments in costs will not be made for interest charges, loss of anticipated profit, undocumented loss of efficiency, home office overhead and unabsorbed overhead other than as allowed by Article 109.13, lost opportunity, preparation of claim expenses and other consequential indirect costs regardless of method of calculation.

The above Basis of Payment is an essential element of the contract and the claim cost recovery of the Contractor shall be so limited."

Add the following to Section 109 of the Standard Specifications.

"**109.13 Payment for Contract Delay.** Compensation for escalated material costs, escalated labor costs, extended project overhead, and extended traffic control will be allowed when such costs result from a delay meeting the criteria in the following table.

Contract Type	Cause of Delay	Length of Delay
Working Days Article 108.04(b)(3) or Article 108.04(b)(4)		No working days have been charged for two consecutive weeks.
$\begin{array}{c} \text{Completion} \text{Article 106.06(b)(1) of} \\ \text{Date} \text{Article 108.08(b)(7)} \end{array}$		The Contractor has been granted a minimum two week extension of contract time, according to Article 108.08.

Payment for each of the various costs will be according to the following.

- (a) Escalated Material and/or Labor Costs. When the delay causes work, which would have otherwise been completed, to be done after material and/or labor costs have increased, such increases will be paid. Payment for escalated material costs will be limited to the increased costs substantiated by documentation furnished by the Contractor. Payment for escalated labor costs will be limited to those items in Article 109.04(b)(1) and (2), except the 35 percent and 10 percent additives will not be permitted.
- (b) Extended Project Overhead. For the duration of the delay, payment for extended project overhead will be paid as follows.
 - (1) Direct Jobsite and Offsite Overhead. Payment for documented direct jobsite overhead and documented direct offsite overhead, including onsite supervisory and administrative personnel, will be allowed according to the following table.

Original Contract Amount	Supervisory and Administrative Personnel
Up to \$5,000,000	One Project Superintendent
Over \$ 5,000,000 - up to \$25,000,000	One Project Manager, One Project Superintendent or Engineer, and One Clerk
Over \$25,000,000 - up to \$50,000,000	One Project Manager, One Project Superintendent, One Engineer, and

	One Clerk
Over \$50,000,000	One Project Manager, Two Project Superintendents,
	One Engineer, and One Clerk

- (2) Home Office and Unabsorbed Overhead. Payment for home office and unabsorbed overhead will be calculated as 8 percent of the total delay cost.
- (c) Extended Traffic Control. Traffic control required for an extended period of time due to the delay will be paid for according to Article 109.04.

When an extended traffic control adjustment is paid under this provision, an adjusted unit price as provided for in Article 701.20(a) for increase or decrease in the value of work by more than ten percent will not be paid.

Upon payment for a contract delay under this provision, the Contractor shall assign subrogation rights to the Department for the Department's efforts of recovery from any other party for monies paid by the Department as a result of any claim under this provision. The Contractor shall fully cooperate with the Department in its efforts to recover from another party any money paid to the Contractor for delay damages under this provision."

PERFORMANCE GRADED ASPHALT BINDER (BDE)

Effective: January 1, 2023

Revise Article 1032.05 of the Standard Specifications to read:

"1032.05 Performance Graded Asphalt Binder. These materials will be accepted according to the Bureau of Materials Policy Memorandum, "Performance Graded Asphalt Binder Qualification Procedure." The Department will maintain a qualified producer list. These materials shall be free from water and shall not foam when heated to any temperature below the actual flash point. Air blown asphalt, recycle engine oil bottoms (ReOB), and polyphosphoric acid (PPA) modification shall not be used.

When requested, producers shall provide the Engineer with viscosity/temperature relationships for the performance graded asphalt binders delivered and incorporated in the work.

(a) Performance Graded (PG) Asphalt Binder. The asphalt binder shall meet the requirements of AASHTO M 320, Table 1 "Standard Specification for Performance Graded Asphalt Binder" for the grade shown on the plans and the following.

Test	Parameter
Small Strain Parameter (AASHTO PP 113) BBR, ΔTc, 40 hrs PAV (40 hrs continuous or 2 PAV at 20 hrs)	-5 °C min.

(b) Modified Performance Graded (PG) Asphalt Binder. The asphalt binder shall meet the requirements of AASHTO M 320, Table 1 "Standard Specification for Performance Graded Asphalt Binder" for the grade shown on the plans.

Asphalt binder modification shall be performed at the source, as defined in the Bureau of Materials Policy Memorandum, "Performance Graded Asphalt Binder Qualification Procedure."

Modified asphalt binder shall be safe to handle at asphalt binder production and storage temperatures or HMA construction temperatures. Safety Data Sheets (SDS) shall be provided for all asphalt modifiers.

(1) Polymer Modification (SB/SBS or SBR). Elastomers shall be added to the base asphalt binder to achieve the specified performance grade and shall be either a styrene-butadiene diblock, triblock copolymer without oil extension, or a styrenebutadiene rubber. The polymer modified asphalt binder shall be smooth, homogeneous, and be according to the requirements shown in Table 1 or 2 for the grade shown on the plans.

Table 1 - Requirements for Styrene-Butadiene Copolymer (SB/SBS) Modified Asphalt Binders			
Test	Asphalt Grade SB/SBS PG 64-28 SB/SBS PG 70-22	Asphalt Grade SB/SBS PG 64-34 SB/SBS PG 70-28 SB/SBS PG 76-22 SB/SBS PG 76-28	
Separation of Polymer ITP, "Separation of Polymer from Asphalt Binder" Difference in °F (°C) of the softening point between top and bottom portions	4 (2) max.	4 (2) max.	
TESTS ON RESIDUE FROM ROLLING THIN FILM OVEN TEST (AASHTO T 240)			
Elastic Recovery ASTM D 6084, Procedure A, 77 °F (25 °C), 100 mm elongation, %	60 min.	70 min.	

Table 2 - Requirements for Styrene-Butadiene Rubber (SBR) Modified Asphalt Binders			
Test	Asphalt Grade SBR PG 64-28 SBR PG 70-22	Asphalt Grade SB/SBS PG 64-34 SB/SBS PG 70-28 SBR PG 76-22 SBR PG 76-28	
Separation of Polymer ITP, "Separation of Polymer from Asphalt Binder" Difference in °F (°C) of the softening point between top and bottom portions	4 (2) max.	4 (2) max.	
Toughness ASTM D 5801, 77 °F (25 °C), 20 in./min. (500 mm/min.), inlbs (N-m)	110 (12.5) min.	110 (12.5) min.	
Tenacity ASTM D 5801, 77 °F (25 °C), 20 in./min. (500 mm/min.), inlbs (N-m)	75 (8.5) min.	75 (8.5) min.	
TESTS ON RESIDUE FROM ROLLING THIN FILM OVEN TEST (AASHTO T 240)			
Elastic Recovery ASTM D 6084, Procedure A, 77 °F (25 °C), 100 mm elongation, %	40 min.	50 min.	

(2) Ground Tire Rubber (GTR) Modification. GTR modification is the addition of recycled ground tire rubber to liquid asphalt binder to achieve the specified performance grade. GTR shall be produced from processing automobile and/or truck tires by the ambient

grinding method or micronizing through a cryogenic process. GTR shall not exceed 1/16 in. (2 mm) in any dimension and shall not contain free metal particles, moisture that would cause foaming of the asphalt, or other foreign materials. A mineral powder (such as talc) meeting the requirements of AASHTO M 17 may be added, up to a maximum of four percent by weight of GTR to reduce sticking and caking of the GTR particles. When tested in accordance with Illinois Modified AASHTO T 27 "Standard Method of Test for Sieve Analysis of Fine and Coarse Aggregates" or AASHTO PP 74 "Standard Practice for Determination of Size and Shape of Glass Beads Used in Traffic Markings by Means of Computerized Optical Method", a 50 g sample of the GTR shall conform to the following gradation requirements.

Sieve Size	Percent Passing
No. 16 (1.18 mm)	100
No. 30 (600 μm)	95 ± 5
No. 50 (300 μm)	> 20

GTR modified asphalt binder shall be tested for rotational viscosity according to AASHTO T 316 using spindle S27. GTR modified asphalt binder shall be tested for original dynamic shear and RTFO dynamic shear according to AASHTO T 315 using a gap of 2 mm.

The GTR modified asphalt binder shall meet the requirements of Table 3.

Table 3 - Requirements for Ground Tire Rubber (GTR) Modified Asphalt Binders			
Test	Asphalt Grade GTR PG 64-28 GTR PG 70-22	Asphalt Grade GTR PG 76-22 GTR PG 76-28 GTR PG 70-28	
TESTS ON RESIDUE FROM ROLLING THIN FILM OVEN TEST (AASHTO T 240)			
Elastic Recovery ASTM D 6084, Procedure A, 77 °F (25 °C), 100 mm elongation, %	60 min.	70 min.	

(3) Softener Modification (SM). Softener modification is the addition of organic compounds, such as engineered flux, bio-oil blends, modified vegetable oils, glycol amines, and fatty acid derivatives, to the base asphalt binder to achieve the specified performance grade. Softeners shall be dissolved, dispersed, or reacted in the asphalt binder to enhance its performance and shall remain compatible with the asphalt binder with no separation. Softeners shall not be added to modified PG asphalt binder as defined in Articles 1032.05(b)(1) or 1032.05(b)(2).

An Attenuated Total Reflectance-Fourier Transform Infrared spectrum (ATR-FTIR) shall be collected for both the softening compound as well as the softener modified

asphalt binder at the dose intended for qualification. The ATR-FTIR spectra shall be collected on unaged softener modified binder, 20-hour Pressurized Aging Vessel (PAV) aged softener modified binder, and 40-hour PAV aged softener modified binder. The ATR-FTIR shall be collected in accordance with Illinois Test Procedure 601. The electronic files spectral files (in one of the following extensions or equivalent: *.SPA, *.SPG, *.IRD, *.IFG, *.CSV, *.SP, *.IRS, *.GAML, *.[0-9], *.IGM, *.ABS, *.DRT, *.SBM, *.RAS) shall be submitted to the Central Bureau of Materials.

Softener modified asphalt binders shall meet the requirements in Table 4.

Table 4 - Requirements for Softener Modified Asphalt Binders		
	Asphalt Grade	
	SM PG 46-28 SM PG 46-34	
Test	SM PG 52-28 SM PG 52-34	
	SM PG 58-22 SM PG 58-28	
	SM PG 64-22	
Small Strain Parameter (AASHTO PP 113)		
BBR, ΔTc, 40 hrs PAV (40 hrs	-5°C min.	
continuous or 2 PAV at 20 hrs)		
Large Strain Parameter (Illinois Modified		
AASHTO T 391) DSR/LAS Fatigue	≥ 54 %	
Property, Δ G* peak τ, 40 hrs PAV	2 54 %	
(40 hrs continuous or 2 PAV at 20 hrs)		

The following grades may be specified as tack coats.

Asphalt Grade	Use
PG 58-22, PG 58-28, PG 64-22	Tack Coat"

Revise Article 1031.06(c)(1) and 1031.06(c)(2) of the Standard Specifications to read:

"(1) RAP/RAS. When RAP is used alone or RAP is used in conjunction with RAS, the percentage of virgin ABR shall not exceed the amounts listed in the following table.

HMA Mixtures - RAP/RAS Maximum ABR % ^{1/2/}			
Ndesign	Binder	Surface	Polymer Modified Binder or Surface ^{3/}
30	30	30	10
50	25	15	10
70	15	10	10
90	10	10	10

1/ For Low ESAL HMA shoulder and stabilized subbase, the RAP/RAS ABR shall not exceed 50 percent of the mixture.

- 2/ When RAP/RAS ABR exceeds 20 percent, the high and low virgin asphalt binder grades shall each be reduced by one grade (i.e. 25 percent ABR would require a virgin asphalt binder grade of PG 64-22 to be reduced to a PG 58-28).
- 3/ The maximum ABR percentages for ground tire rubber (GTR) modified mixes shall be equivalent to the percentages specified for SBS/SBR polymer modified mixes.
- (2) FRAP/RAS. When FRAP is used alone or FRAP is used in conjunction with RAS, the percentage of virgin asphalt binder replacement shall not exceed the amounts listed in the following table.

HMA Mixtures - FRAP/RAS Maximum ABR % ^{1/2/}			
Ndesign	Binder	Surface	Polymer Modified Binder or Surface ^{3/}
30	55	45	15
50	45	40	15
70	45	35	15
90	45	35	15
SMA			25
IL-4.75			35

- 1/ For Low ESAL HMA shoulder and stabilized subbase, the FRAP/RAS ABR shall not exceed 50 percent of the mixture.
- 2/ When FRAP/RAS ABR exceeds 20 percent for all mixes, the high and low virgin asphalt binder grades shall each be reduced by one grade (i.e. 25 percent ABR would require a virgin asphalt binder grade of PG 64-22 to be reduced to a PG 58-28).
- 3/ The maximum ABR percentages for GTR modified mixes shall be equivalent to the percentages specified for SBS/SBR polymer modified mixes."

Add the following to the end of Note 2 of Article 1030.03 of the Standard Specifications.

"A dedicated storage tank for the ground tire rubber (GTR) modified asphalt binder shall be provided. This tank shall be capable of providing continuous mechanical mixing throughout and/or recirculation of the asphalt binder to provide a uniform mixture. The tank shall be heated and capable of maintaining the temperature of the asphalt binder at 300 °F to 350 °F (149 °C to 177 °C). The asphalt binder metering systems of dryer drum plants shall be calibrated with the actual GTR modified asphalt binder material with an accuracy of ± 0.40 percent."

SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE)

Effective: November 2, 2017 Revised: April 1, 2019

Replace the second paragraph of Article 109.12 of the Standard Specifications with the following:

"This mobilization payment shall be made at least seven days prior to the subcontractor starting work. The amount paid shall be at the following percentage of the amount of the subcontract reported on form BC 260A submitted for the approval of the subcontractor's work.

Value of Subcontract Reported on Form BC 260A	Mobilization Percentage
Less than \$10,000	25%
\$10,000 to less than \$20,000	20%
\$20,000 to less than \$40,000	18%
\$40,000 to less than \$60,000	16%
\$60,000 to less than \$80,000	14%
\$80,000 to less than \$100,000	12%
\$100,000 to less than \$250,000	10%
\$250,000 to less than \$500,000	9%
\$500,000 to \$750,000	8%
Over \$750,000	7%"

VEHICLE AND EQUIPMENT WARNING LIGHTS (BDE)

Effective: November 1, 2021 Revised: November 1, 2022

Add the following paragraph after the first paragraph of Article 701.08 of the Standard Specifications:

"The Contractor shall equip all vehicles and equipment with high-intensity oscillating, rotating, or flashing, amber or amber-and-white, warning lights which are visible from all directions. In accordance with 625 ILCS 5/12-215, the lights may only be in operation while the vehicle or equipment is engaged in construction operations."

State of Illinois Department of Transportation Bureau of Local Roads and Streets

SPECIAL PROVISION FOR INSURANCE

Effective: February 1, 2007 Revised: August 1, 2007

All references to Sections or Articles in this specification shall be construed to mean specific Section or Article of the Standard Specifications for Road and Bridge Construction, adopted by the Department of Transportation.

The Contractor shall name the following entities as additional insured under the Contractor's general liability insurance policy in accordance with Article 107.27:

The entities listed above and their officers, employees, and agents shall be indemnified and held harmless in accordance with Article 107.26.

State of Illinois Department of Transportation Bureau of Local Roads and Streets

SPECIAL PROVISION FOR EQUIPMENT RENTAL RATES

Effective: January 1, 2012

All references to Sections or Articles in this specification shall be construed to mean a specific Section or Article of the Standard Specifications for Road and Bridge Construction, adopted by the Department of Transportation.

Replace Article 109.04(b)(4) with the following:

"(4) Equipment. For any machinery or special equipment (other than small tools) the use of which has been authorized by the Engineer, the Contractor will be paid according to the latest revision of "SCHEDULE OF AVERAGE ANNUAL EQUIPMENT OWNERSHIP EXPENSE" and latest index factor as issued by the Illinois Department of Transportation. The equipment should be of a type and size reasonably required to complete the extra work."

State of Illinois DEPARTMENT OF TRANSPORTATION Bureau of Local Roads & Streets SPECIAL PROVISION FOR LOCAL QUALITY ASSURANCE/ QUALITY MANAGEMENT QC/QA Effective: January 1, 2022

Replace the first five paragraphs of Article 1030.06 of the Standard Specifications with the following:

"**1030.06 Quality Management Program.** The Quality Management Program (QMP) will be Quality Control / Quality Assurance (QC/QA) according to the following."

Delete Article 1030.06(d)(1) of the Standard Specifications.

Revise Article 1030.09(g)(3) of the Standard Specifications to read:

"(3) If core testing is the density verification method, the Contractor shall provide personnel and equipment to collect density verification cores for the Engineer. Core locations will be determined by the Engineer following the document "Hot-Mix Asphalt QC/QA Procedure for Determining Random Density Locations" at density verification intervals defined in Article 1030.09(b). After the Engineer identifies a density verification location and prior to opening to traffic, the Contractor shall cut a 4 in. (100 mm) diameter core. With the approval of the Engineer, the cores may be cut at a later time."

Revise Article 1030.09(h)(2) of the Standard Specifications to read:

"(2) After final rolling and prior to paving subsequent lifts, the Engineer will identify the random density verification test locations. Cores or nuclear density gauge testing will be used for density verification. The method used for density verification will be as selected below.

Density Verification Method							
X	Nuclear Density Gauge (Correlated when paving ≥ 3,000 tons per mixture)						

Density verification test locations will be determined according to the document "Hot-Mix Asphalt QC/QA Procedure for Determining Random Density Locations". The density testing interval for paving wider than or equal to 3 ft (1 m) will be 0.5 miles (800 m) for lift thicknesses of 3 in. (75 mm) or less and 0.2 miles (320 m) for lift thicknesses greater than 3 in. (75 mm). The density testing interval for paving less than 3 ft (1 m) wide will be 1 mile (1,600 m). If a day's paving will be less than the prescribed density testing interval, the length of the day's paving will be the interval for that day. The density testing interval for mixtures used for patching will be 50 patches with a minimum of one test per mixture per project.

If core testing is the density verification method, the Engineer will witness the Contractor coring, and secure and take possession of all density samples at the

density verification locations. The Engineer will test the cores collected by the Contractor for density according to Illinois Modified AASHTO T 166 or AASHTO T 275.

If nuclear density gauge testing is the density verification method, the Engineer will conduct nuclear density gauge tests. The Engineer will follow the density testing procedure detailed in the document "Illinois Modified ASTM D 2950, Standard Test Method for Density of Bituminous Concrete In-Place by Nuclear Method".

A density verification test will be the result of a single core or the average of the nuclear density tests at one location. The results of each density test must be within acceptable limits. The Engineer will promptly notify the Contractor of observed deficiencies."

Revise the seventh paragraph and all subsequent paragraphs in Section D. of the document "Hot-Mix Asphalt QC/QA Initial Daily Plant and Random Samples" to read:

"Mixtures shall be sampled from the truck at the plant by the Contractor following the same procedure used to collect QC mixture samples (Section A). This process will be witnessed by the Engineer who will take custody of the verification sample. Each sample bag with a verification mixture sample will be secured by the Engineer using a locking ID tag. Sample boxes containing the verification mixture sample will be sealed/taped by the Engineer using a security ID label."

State of Illinois DEPARTMENT OF TRANSPORTATION Bureau of Local Roads & Streets

SPECIAL PROVISION FOR EMULSIFIED ASPHALTS

Effective: January 1, 2007 Revised: February 7, 2008

All references to Sections and Articles in this Special Provision shall be construed to mean specific Sections and Articles in the Standard Specifications for Road and Bridge Construction adopted by the Department of Transportation.

Replace the table after Note 2 in Article 403.02 with the following:

	Bituminous Materials Recommended for Weather Conditions Indicated								
Type of Construction	Warm [15 °C to 30 °C]* [(60 °F to 85 °F)]*	Hot [30 °C Plus]* [(85 °F Plus)]*							
Prime	MC-30, PEP	MC-30, PEP							
Cover Coat and Seal Coat	RS-2, CRS-2, RC-800, RC-3000, MC-800, MC-3000, SC-3000, HFE-90, HFE-150, HFE-300, HFRS-2, PEA**	RS-2, CRS-2, RC-800, RC-3000, MC-800, MC-3000, SC-3000, PG46-28, PG52-28, HFE-90, HFE-150, HFE-300, HFRS-2, PEA**							

* Temperature of the air in the shade at the time of application.

** PEA is only allowed on roads with low traffic volumes

Replace the table after Note 2 in Article 406.02 with the following:

Type of Construction	Bituminous Materials Recommended			
Prime (tack) on Brick, Concrete, or Bituminous Bases (Note 3)	SS-1, SS-1h, CSS-1, CSS-1h, HFE-90, RC-70			
Prime on Aggregate Bases (Note 4)	MC-30, PEP			
Mixture for Cracks, Joints, and Flangeways	PG58-22, PG64-22			

- Note 3. When emulsified asphalts are used, they shall be diluted with an equal volume of potable water. HFE emulsions shall be diluted by the manufacturer. The diluted material shall be thoroughly agitated within 24 hours of application and show no separation of water and emulsion. The diluted material shall not be returned to an approved emulsion storage tank.
- Note 4. Preparation of the bituminous PEP shall be as specified in Article 403.05.

Replace the table in Article 1032.04 with the following:

Spraying Application Temperature Ranges							
Turne and Grade of	Temperature Ranges						
Type and Grade of Bituminous Material	°F	O°					
Biturninous Materiai	min max.	min max.					
PEP	60 - 130	15 - 55					
PEA	140 - 190	60 -88					
MC-30	85 - 190	30 - 90					
MC-70, RC-70, SC-70	120 - 225	50 - 105					
MC-250, SC-250	165 - 270	75 - 130					
MC-800, SC-800	200 - 305	95 - 150					
MC-3000, SC-3000	230 - 345	110 - 175					
PG46-28	275 - 385	135 - 195					
PG52-28	285 - 395	140 - 200					
RS-2, CRS-2	110 - 160	45 - 70					
SS-1, SS-1h, CSS-1, CSS-1h	75 - 130	25 - 55					
SS-1hP, CSS-1hP	75 - 130	25 - 55					
HFE-90, HFE-150, HFE-300	150 - 180	65 - 80					
HFP, CRSP, HFRS-2	150 - 180	65 - 80					
E-2	85 - 190	30 - 90					
E-3	120 - 225	50 - 105					
E-4	165 - 270	75 - 130					

Add subparagraph (g) to Article 1032.06:

(g) Penetrating Emulsified Asphalt (PEA). The penetrating emulsified asphalt shall meet the following requirements when tested according to AASHTO T59:


Viscosity, Saybolt Fural @ 25°C (77°F),	sec:	20 - 500
Sieve Test, retained on 850 µm (No. 20) sieve, maximum,	%:	0.10
Storage Stability Test, 1 day, maximum,	%:	1
Float Test @ 60°C (140°F), minimum,	sec:	150
Stone Coating Test, 3 minutes,	:	Stone Coated Thoroughly
Particle Charge	:	Negative
pH, minimum	:	7.3
Distillation Test:		
Distillation to 260°C (500°F) Residue, minimum	%:	65
Oil Distillate by Volume, maximum	%:	3
Test on residue from distillation:		
Penetration @ 25°C (77°F), 100 g, 5 sec, minimum d	mm:	300

Replace the last sentence and table of Article 1032.06 with the following:

The different grades are, in general, used for the following.

Grade	Use		
SS-1, SS-1h, CSS-1, CSS-1h, HFE 90, SS-1hP, CSS-1hP	Tack or fog seal		
PEP	Bituminous surface treatment prime		
RS-2, HFE 90, HFE 150, HFE 300, CRSP, HFP, CRS-2, HFRS-2, PEA	Bituminous surface treatment		
CSS-1h Latex Modified	Microsurfacing		

TREMONT ROAD DISTRICT TWP. 24 N, R 3W, 3rd P.M. 22-18000-01-GM

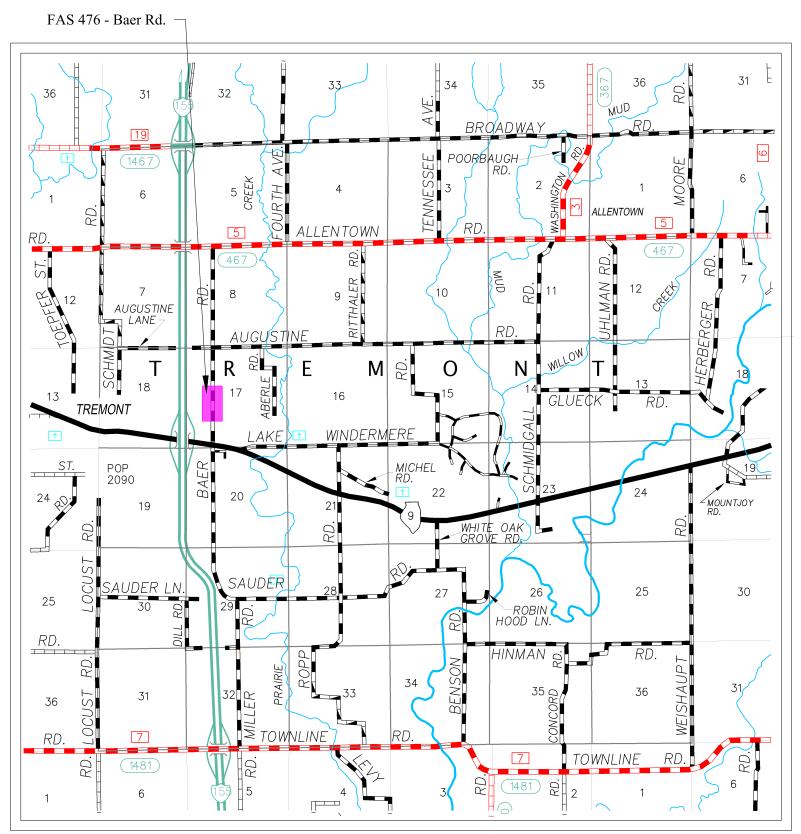

QUANTITIES


Route/Section	Length	<u>Width</u>	<u>Area</u>	
Baer Rd. / FAS 476	1,855 LF	23'	4,741 SQ YD	
Hot-Mix Asphalt Surface Removal	<u>l- Butt Joint:</u>			
50' x 23' @ north end of project. = 50' x 23' @ south end of project. = 62' x 6' @ House Entrance=	128 S	Q YD Q YD Q YD	=	<u>297 SQ YD</u>
Temporary Ramp:				
23' x 4' @ north end of project. = 23' x 4' @ south end of project. =	10 S(<u>10 S(</u> Total	<u>) YD</u>	=	<u>20 SQ YD</u>
Polymerized Bituminous Materials	s (Tack Coat)	<u>):</u>		
4,741 SQ YD x 0.72#/SQ YD			=	<u>3,414 POUND</u>
Hot-Mix Asphalt Surface Course,	IL-9.5, Mix "	<u>C", N50:</u>		
4,741 SQ YD x 112#/SQ YD x 2.00'	"/ 2000#		=	<u>531 TON</u>
Incidental Hot-Mix Asphalt Surface	cing:			
200 SY x 112#/SQ YD x 2.00"/ 200	0# (Entrances	s and Mailbo	x) =	<u>22 TON</u>
Aggregate Shoulders, Type B (Spe	cial):			
1,855 LF x 2 = 3,710 LF x 3'/9 = 1,2 1,237 SQ YD x 114#/SQ YD x 2.00'	"/2000# = 14	1 TON (Road) <u>7 TON</u> (Radiu	lway) us', Entrances, etc	2.)
Short Term Pavement Marking:	То	otal	=	<u>148 TON</u>
1,855 LF / 40' x 4'			=	186 FOOT

Tazewell County Tremont R.D. Sec. 23-18000-01-GM

<u>QUANTITIES</u> (Cont'd)

Short Term Pavement Marking Removal:		
1,855 LF / 40' x 4'= 186 Foot x 4" /12"	=	<u>62 SQ FT</u>
Traffic Control and Protection (Special):		
Denotes item includes entire project	=	<u>1 L SUM</u>

TYPICAL CROSS SECTION FAS 476 / BAER RD.

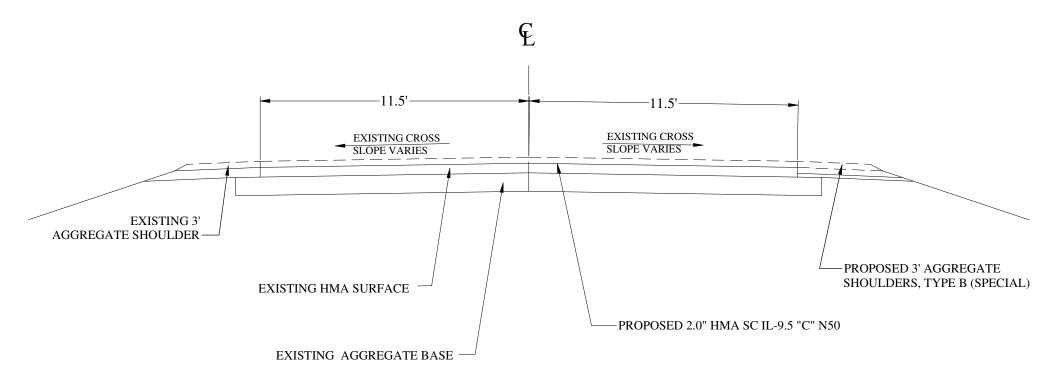



LOCATION: FAS 476 - BAER RD.								
SURFACE								
PG 58-28								
4% @ Ndes 50								
IL 9.5								
MIXTURE C								

Section: 23-18000-01-GM Route: FAS 476 / Baer Rd. Village of Tremont Limits northerly 1,855 ft

TREMONT R.D. SEC. 23-18000-01-GM

STANDARD FOR HOT-MIX ASPHALT SURFACING AT SIDEROADS, ENTRANCES AND MAILBOXES

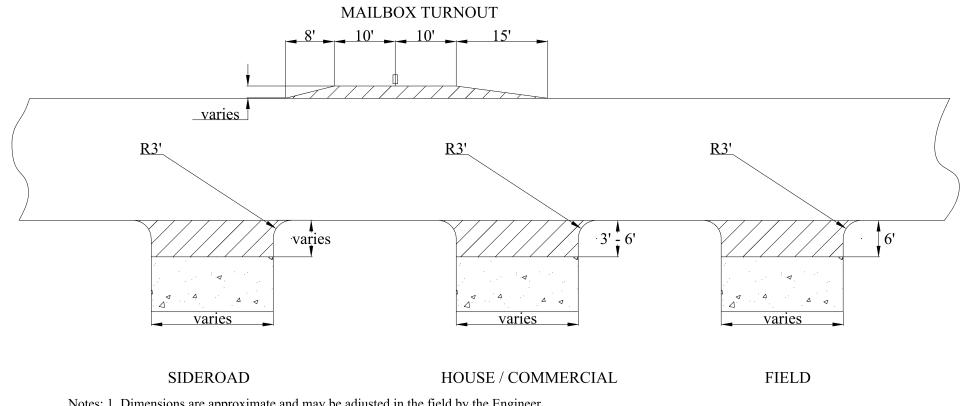


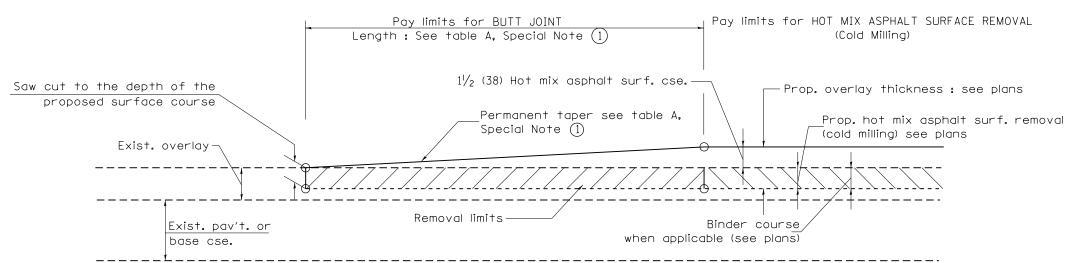

CASE 1 : WITH HOT MIX ASPHALT SURFACE REMOVAL (COLD MILLING)

	I	AFER RAIES		
SPECIAL NOTE	ELEMENT	MAINLINE INTERSTATES &	ALL	1
NUMBER		4-LANE EXPRESSWAYS	OTHERS	
	BUTT JOINT	1:480	1:240	2
	TAPER RATE			
2	TEMPORARY RAMP	1:80	1:40	
	TAPER RATE			3

TABLE A TAPER RATES

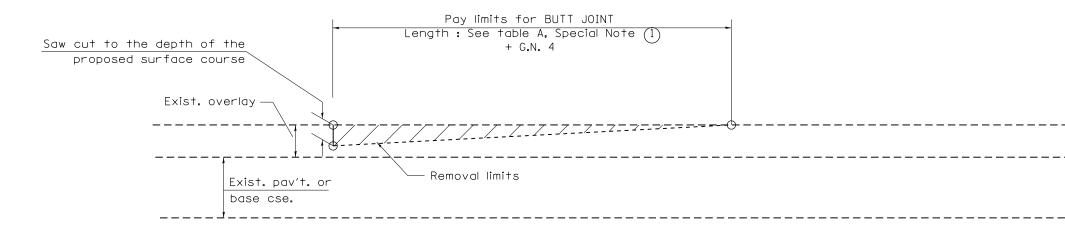

CASE 2 : NO HOT MIX ASPHALT SURFACE REMOVAL (COLD MILLING)

01-01-97	RENUM. C-23.01, NEW REVISION BOX	T.P.	08-21-13	MAJOR MODIFICATIONS	R.D.		
04-01-97	CORRECTION TO DEPTH	J.A.	04-12-16	MINOR CORRECTIONS	R.D.	STATE OF ILLINOIS	BUTT JOINTS
09-15-05	REVISED DESIGNER NOTE	M.M.A.	02-14-17	ADDED NOTE 5	R.D.	DEPARTMENT OF TRANSPORTATION	
10-16-06	REVISED TO 2007 SPEC.	M.A.	07-16-19	Wording and Spelling corrections	R.D.	Page 29	NOT TO SCALE
						•	

GENERAL NOTES

1. The work shall be done in accordance with Article 406.08 and the Special Provision for Butt Joints.

2. The pavement surface to be removed may be either bituminous or P.C. concrete. The work shall be performed in accordance with Article 440.04 and the Special Provisions for Butt Joints.


3. The saw cut joints shall be primed just prior to the placing of bituminous material. The work will be in accordance with the applicable portions of Article 406.05.

4. The length of butt joint is based on the taper rate times change in cold milling depth within the butt joint pay limits, unless otherwise indicated.


5. Temporary ramps are paid for separately and not included in the cost of the butt joints.

All dimensions are in inches (millimeters) unless otherwise noted.

	F.A. RTE.	SEC	LION	COUNTY	TOTAL SHEETS	SHEET NO.
TS						
SHT. 1 OF 3				CONTRACT	NO.	
CADD STD. 406101-D4	FED. RO	DAD DIST. NO.	ILLINOIS FED. A	ID PROJECT		

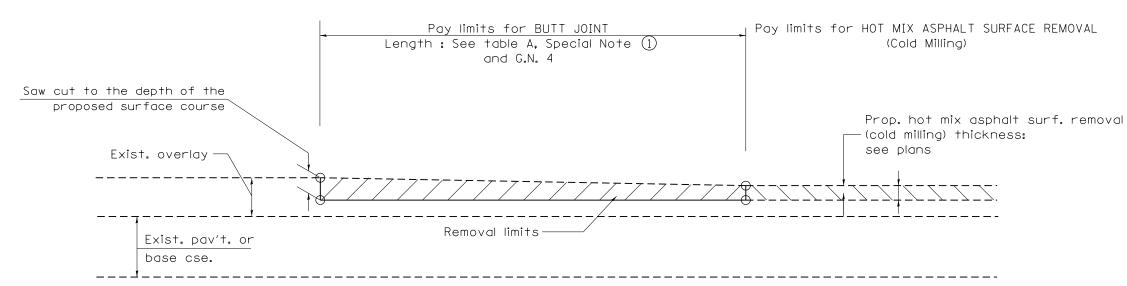


CASE 3 : HOT MIX ASPHALT SURFACE REMOVAL (COLD MILLING) TIE-IN TO EXISTING BITUMINOUS TAPER

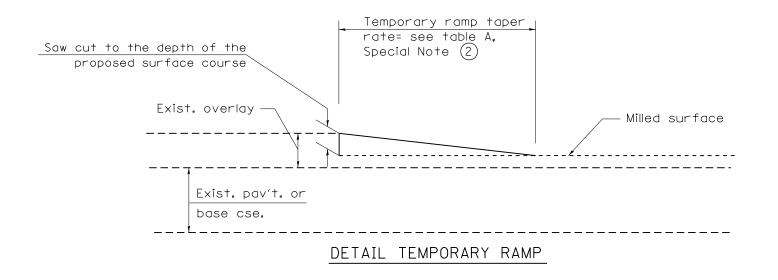

			F.A. SECTION	COUNTY TOTAL SHEE
	STATE OF ILLINOIS	BUTT JOINTS	RIE. SECTION	SHEETS NO.
	DEPARTMENT OF TRANSPORTATION		SHT. 2 OF 3	CONTRACT NO.
	Page 30	NOT TO SCALE	CADD STD. 406101-D4 FED. ROAD DIST. NO. ILLINOIS	FED. AID PROJECT


All dimensions are in inches (millimeters) unless otherwise noted.

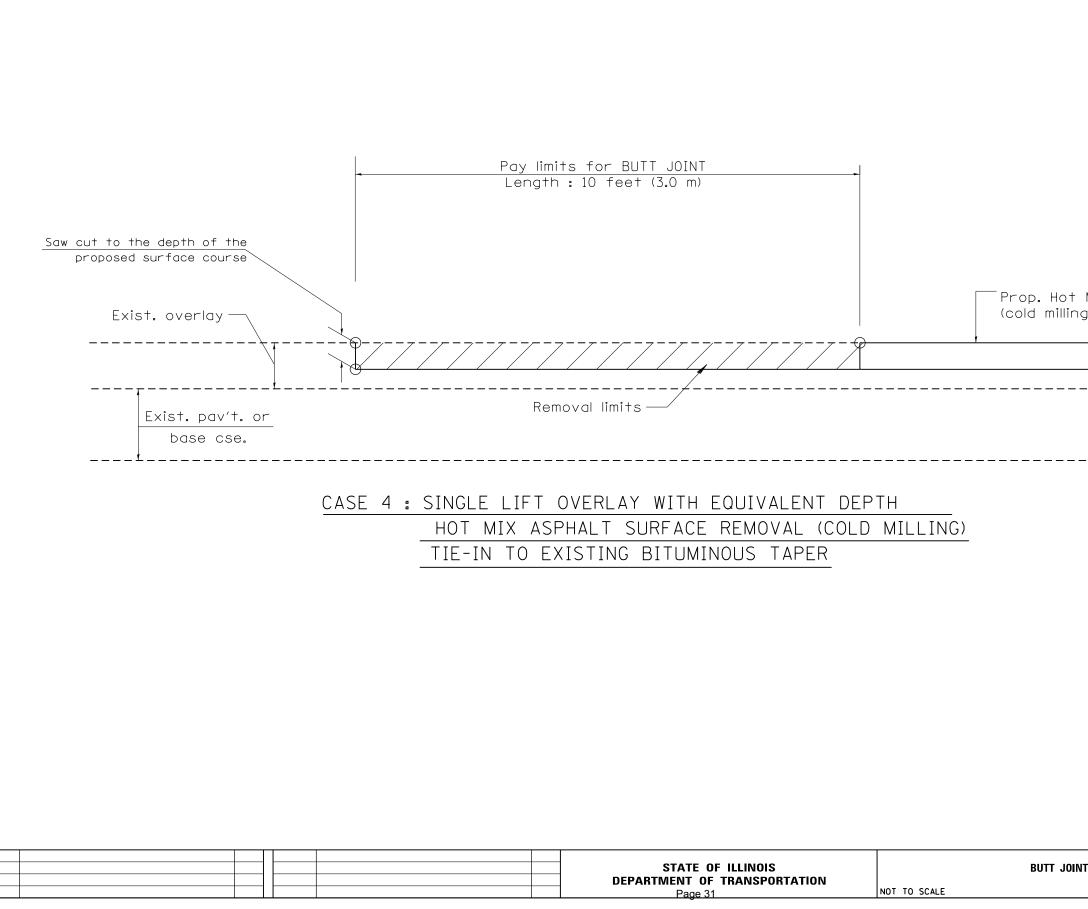


Prop. Hot Mix Asphalt surf. removal (cold milling) per plans.

All dimensions are in inches (millimeters) unless otherwise noted.


			F.A. RTE.		SEC	TION	COUNTY	TOTAL SHEETS	SHEET NO.
NTS									
	C 4 D D	SHT. 3 OF 3					CONTRACT	NO.	
	CADD	STD. 406101-D4	FED. RO	DAD DIST. N	10.	ILLINOIS FED. A	ID PROJECT		

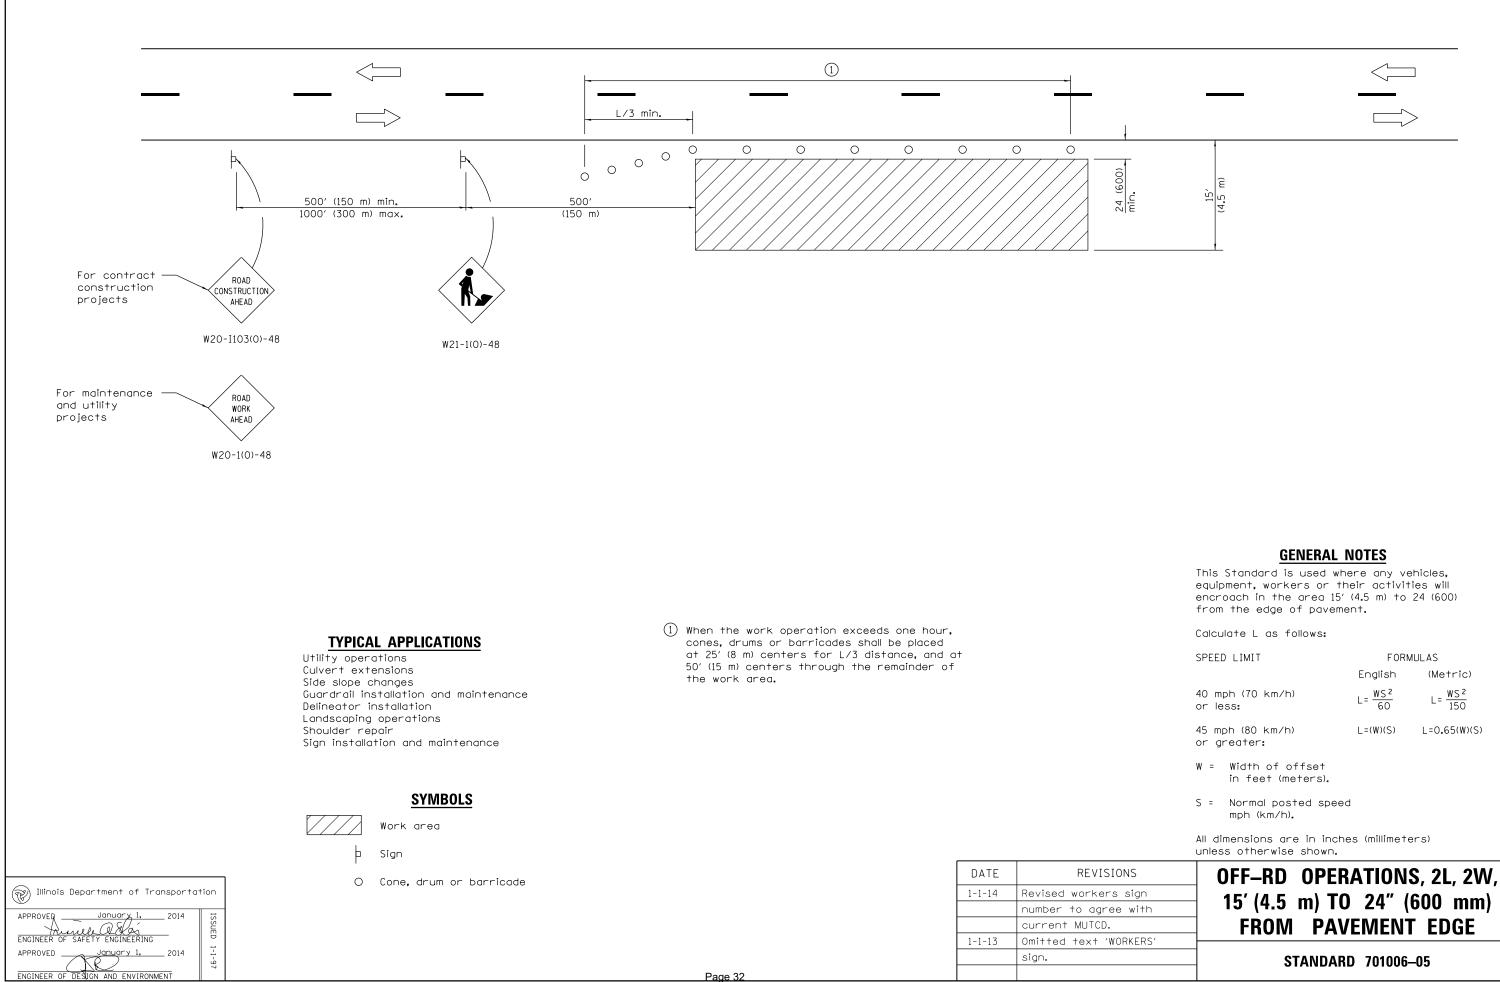

IONS
's sign
ee with
WORKERS'

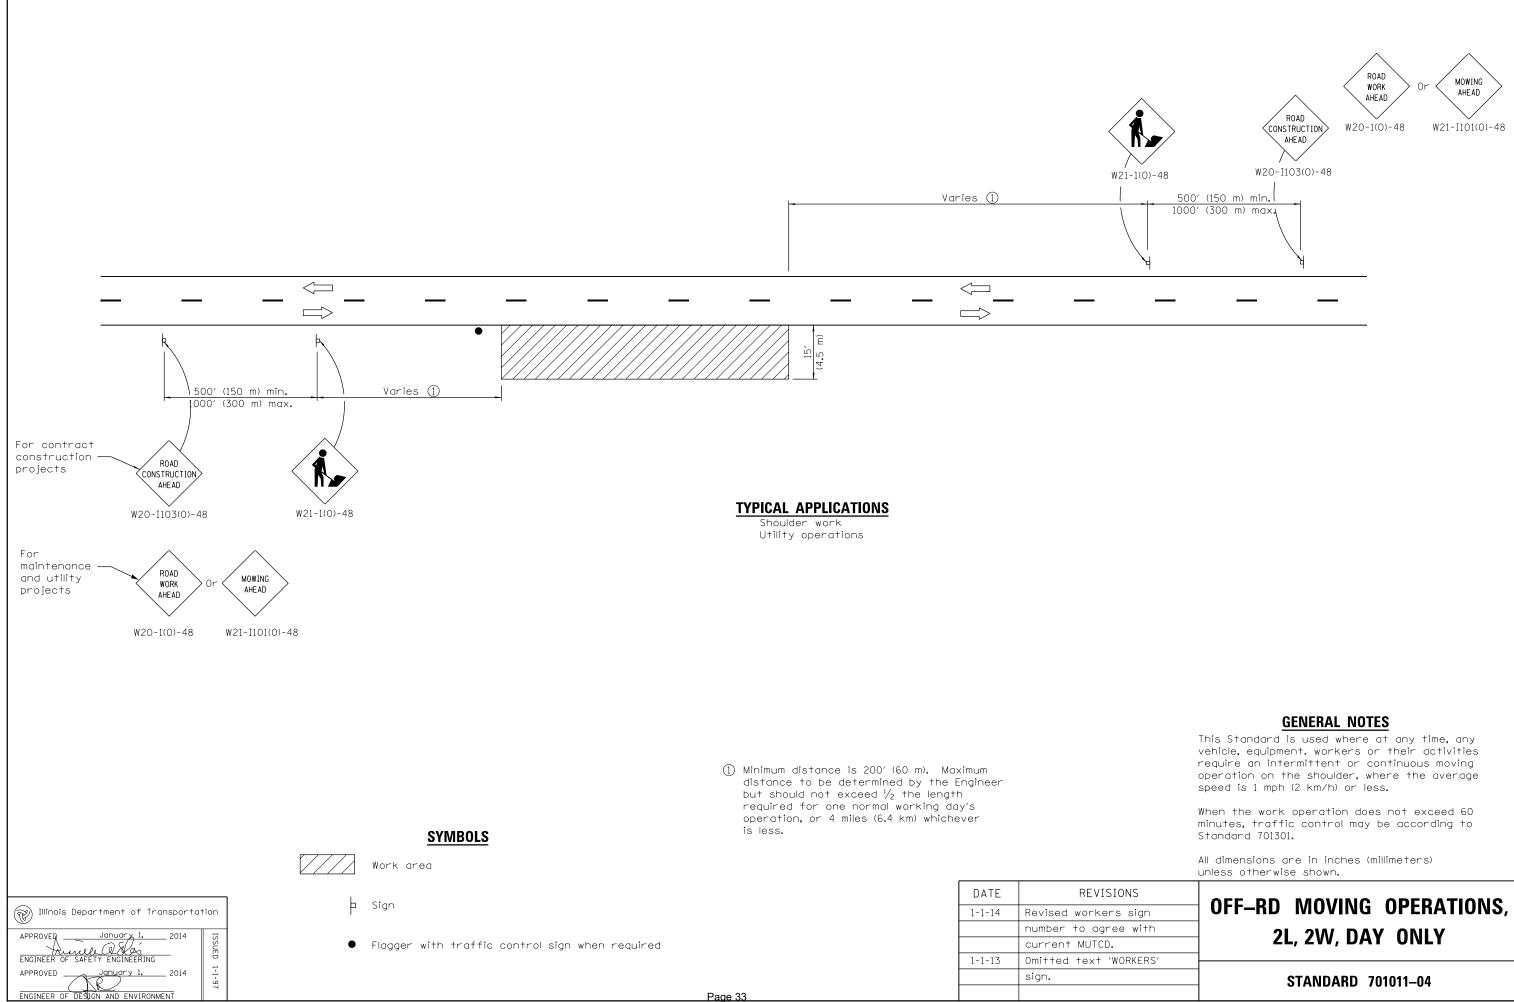


SIONS						
rs sign	OFF-RD MOVING OPERATIONS,					
ee with						
2L, 2W, DAY ONLY						
WORKERS'						
	STANDARD 701011–04					

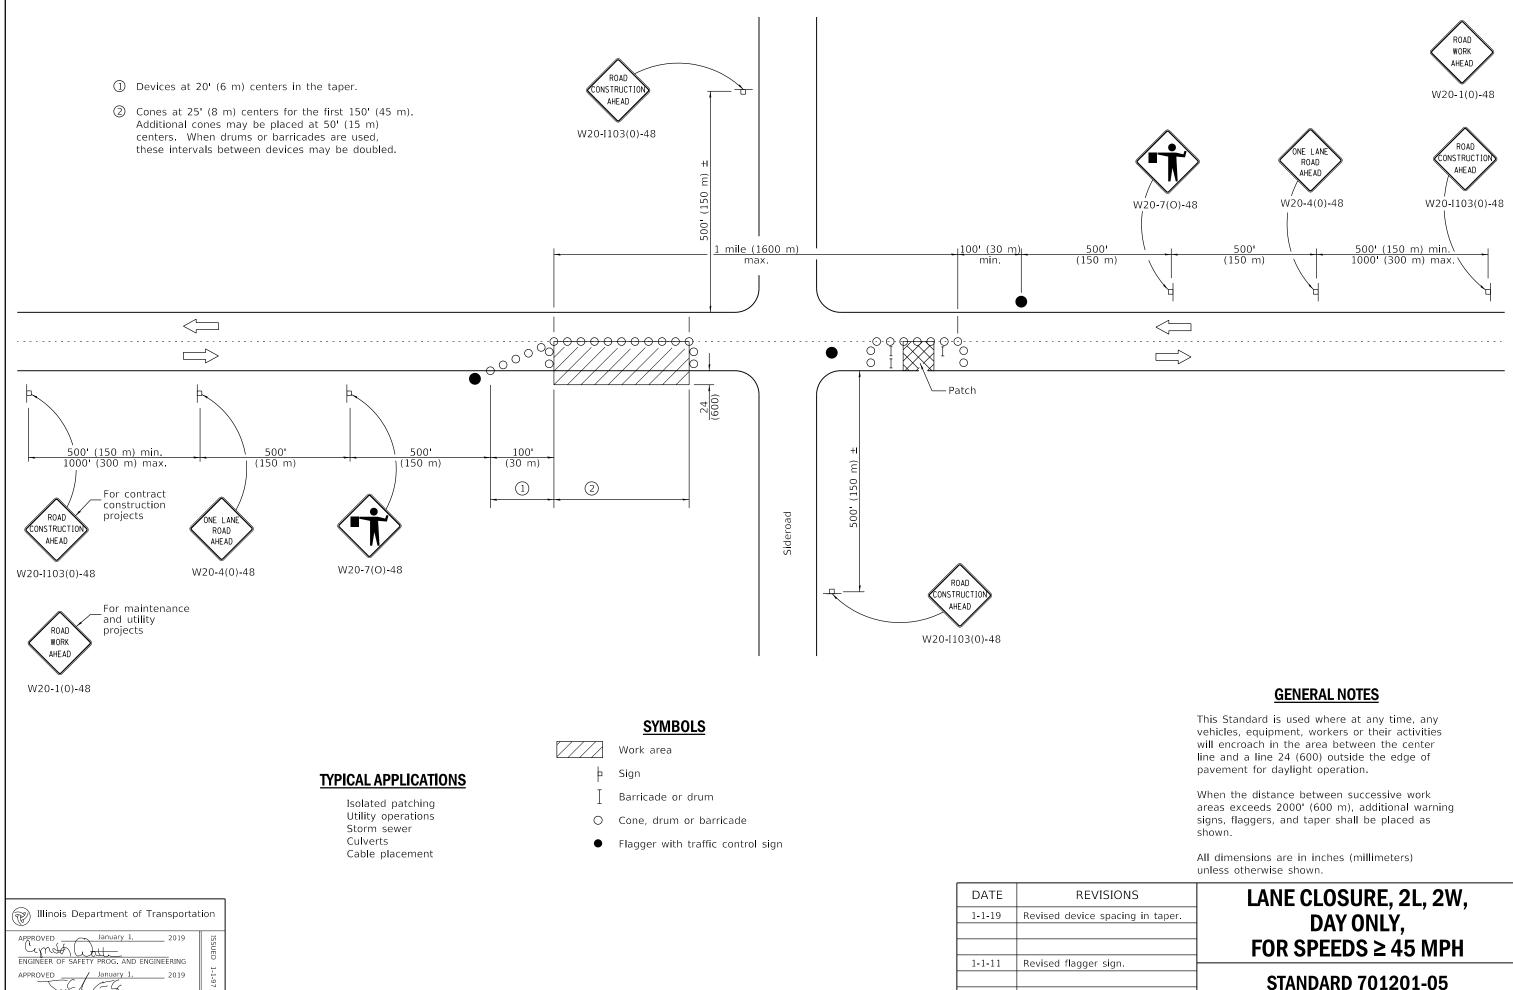

Page 34

IONS
acing in taper.
gn.

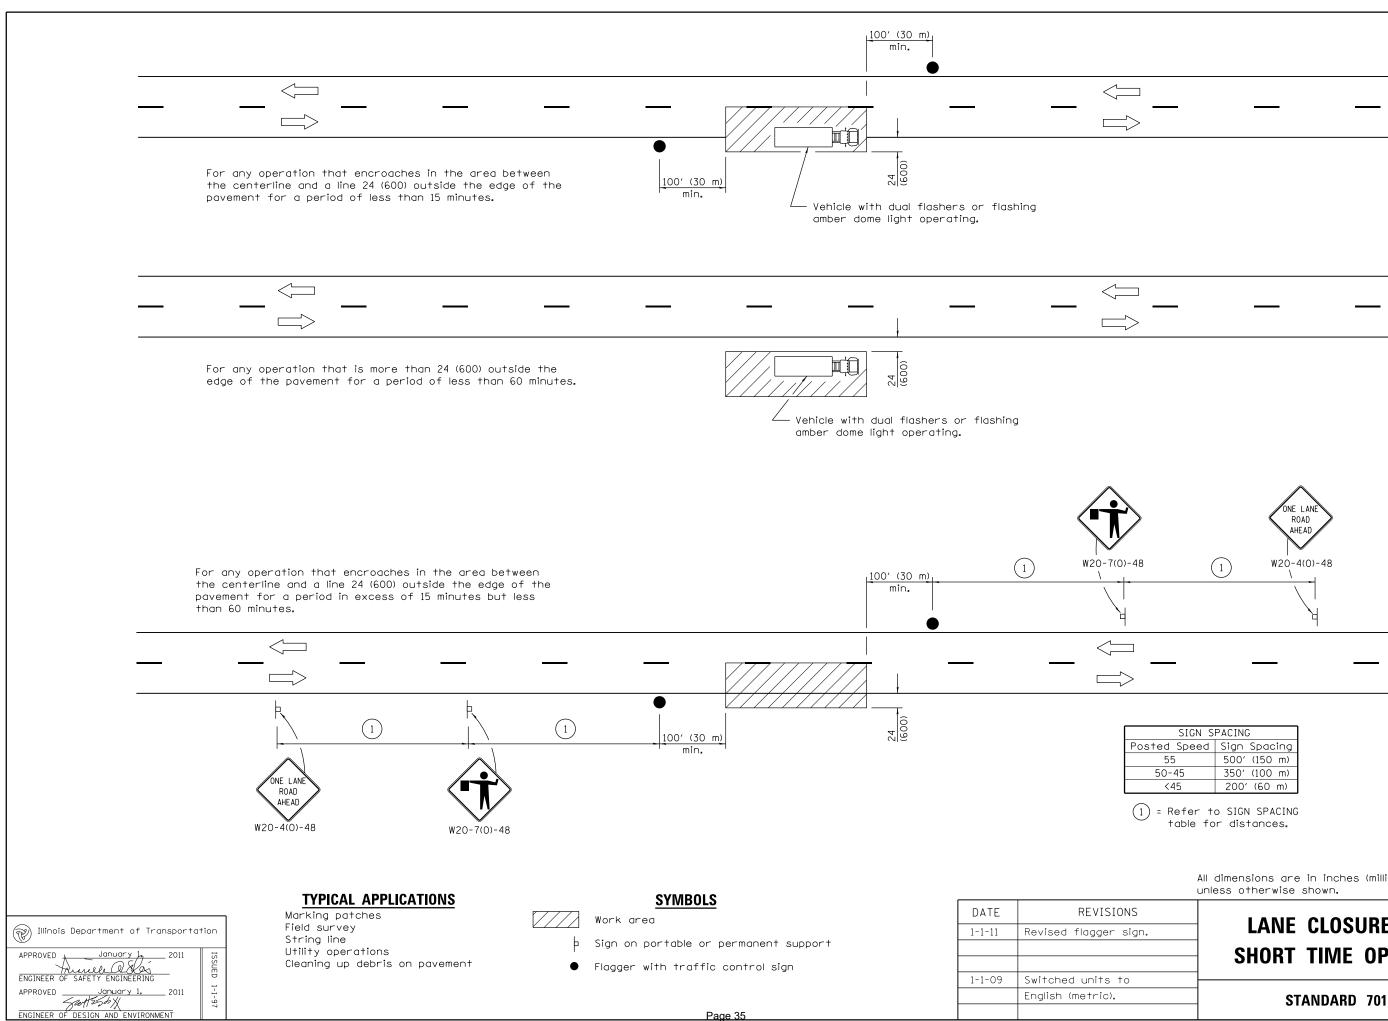

	 _	
	 _	
•	ONE LANE	


SIGN S	PACING
Posted Speed	Sign Spacing
55	500′ (150 m)
50-45	350′ (100 m)
<45	200′ (60 m)
143	200 (00 11)


All dimensions are in inches (millimeters)

IONS		
r sign.		
+0		
).		


LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS

STANDARD 701301–04

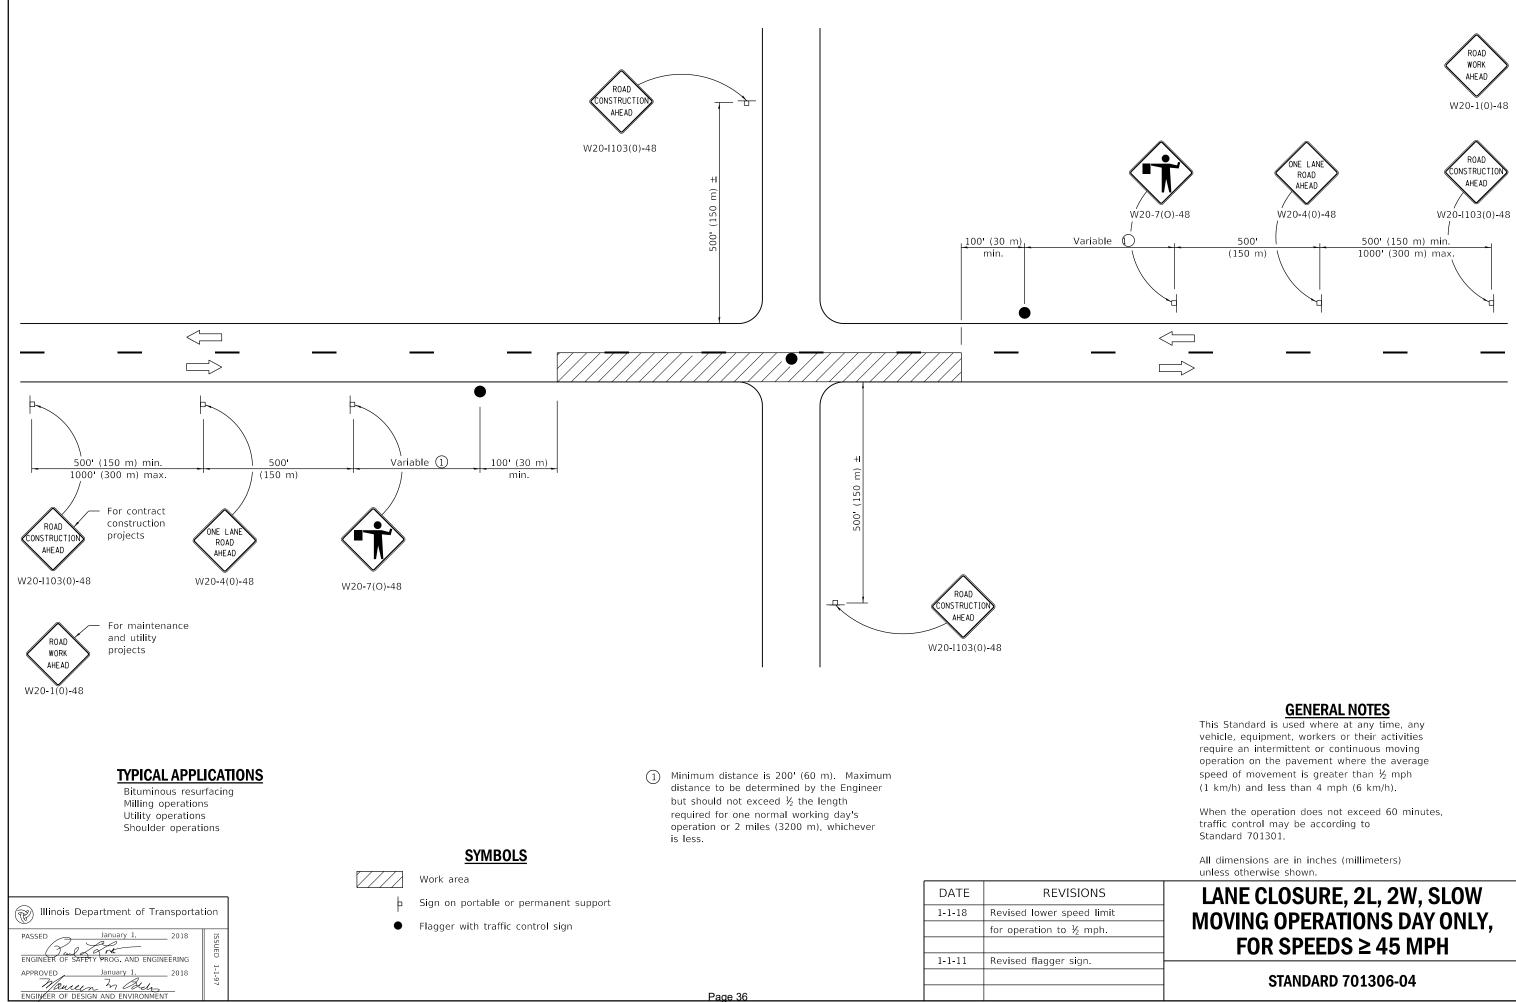

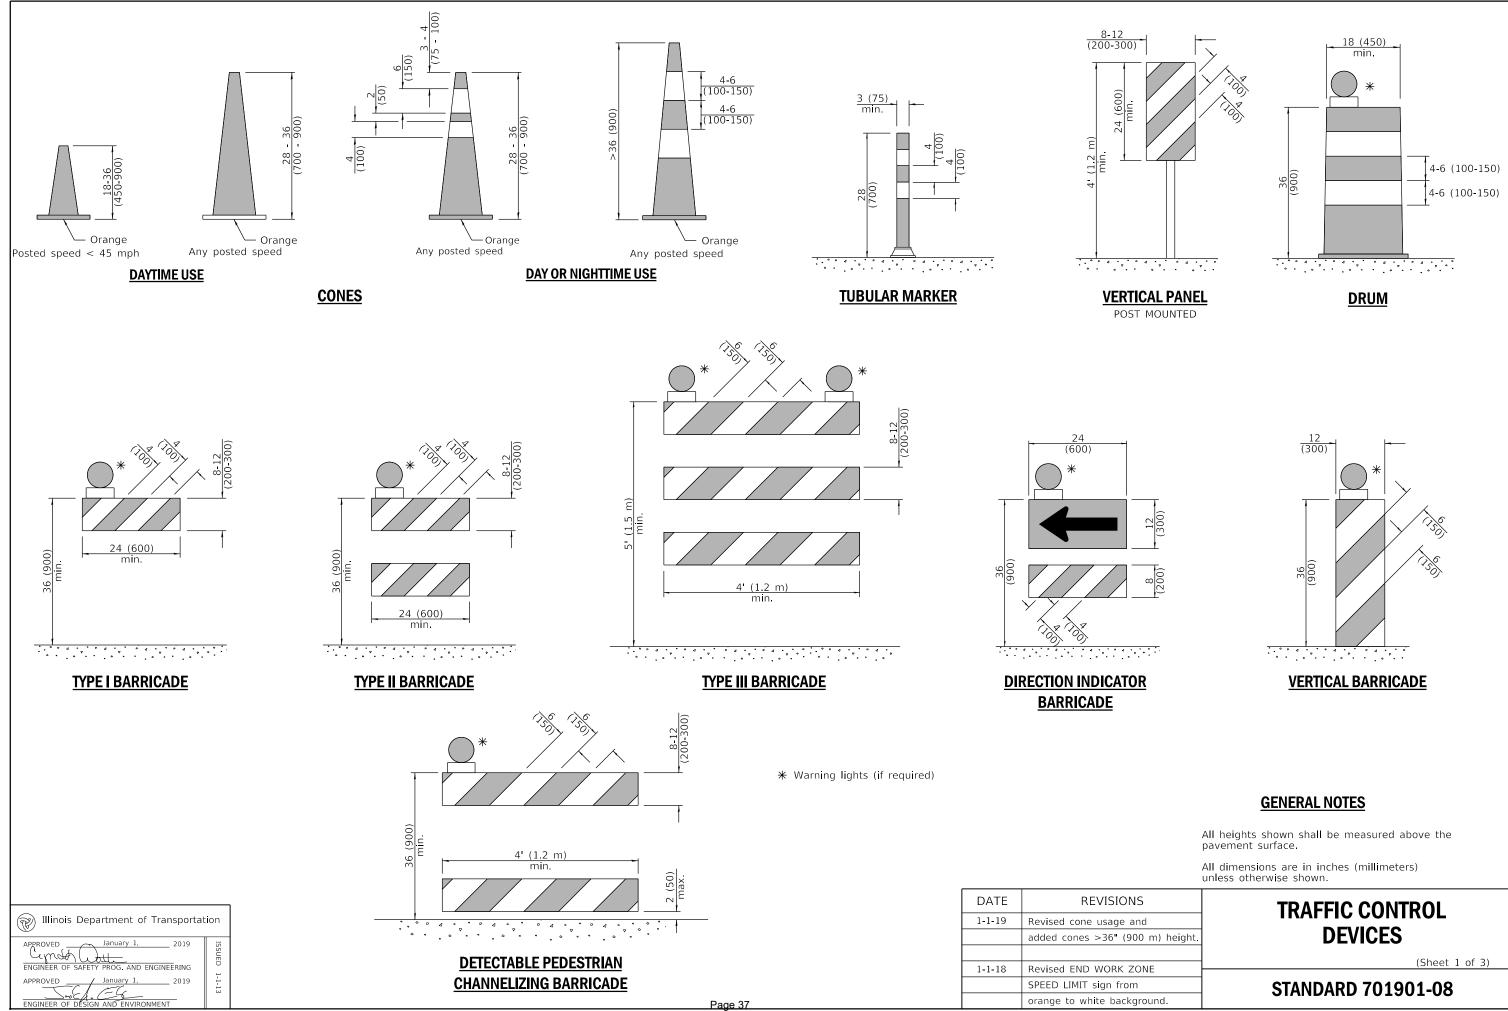

SIONS
ge and
" (900 m) height.
rk zone
from
background.

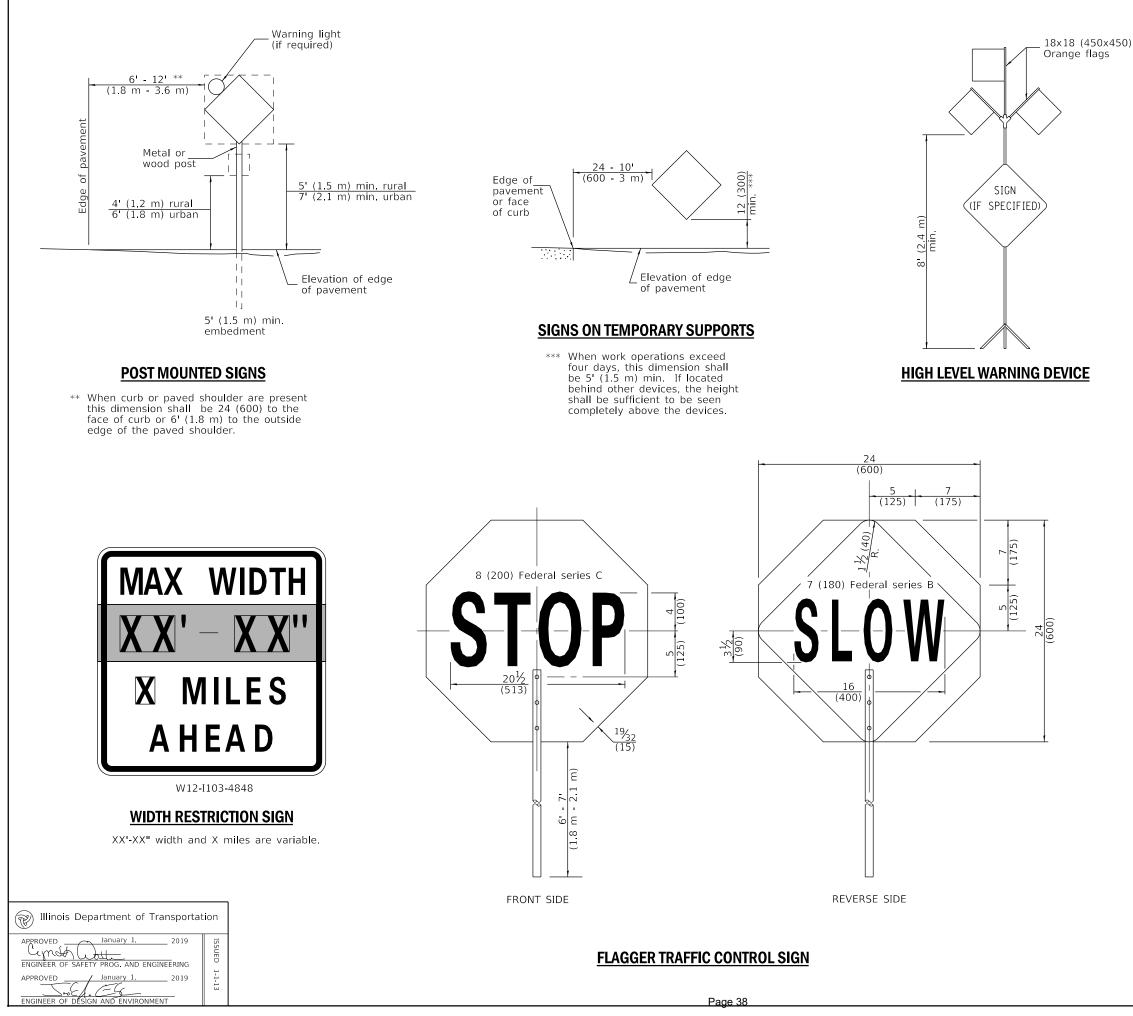





G20-I104(0)-6036

G20-I105(0)-6024


This signing is required for all projects 2 miles (3200 m) or more in length.

ROAD CONSTRUCTION NEXT X MILES sign shall be placed 500' (150 m) in advance of project limits.

END CONSTRUCTION sign shall be erected at the end of the job unless another job is within 2 miles (3200 m).

Dual sign displays shall be utilized on multilane highways.

WORK LIMIT SIGNING



Sign assembly as shown on Standards or as allowed by District Operations.



G20-I103-6036

This sign shall be used when the above sign assembly is used.

HIGHWAY CONSTRUCTION SPEED ZONE SIGNS

**** R10-I108p shall only be used along roadways under the juristiction of the State.

TRAFFIC CONTROL DEVICES

(Sheet 2 of 3)

STANDARD 701901-08

