**Tazewell County Highway Department** 

# AUTHORIZATION TO BID FORM

Addenda will be published to our Bid Letting page in the same manner as the plans and specifications. It is the sole responsibility of the plan holders to periodically check the website for plan addenda.

# ALL BIDDERS PLANNING TO PLACE A BID MUST FILL OUT THIS FORM TO BE AUTHORIZED TO BID.

- This form must be completed, signed and either faxed to (309) 925-5533 or emailed to jsciortino@tazewell-il.gov.
- Failure to submit this completed form will result in the bid not being accepted.
- Contractors may verify we have received their Authorization to Bid form by checking the **Plan Holders List** found under the corresponding letting date.
- If an email address is provided, a Notice of Addenda will be sent when updates are available.
- Bid results are typically posted by noon on the day of the letting and are preliminary until approved by the County Board on the last Wednesday of the month.

| Company Name:                           |  |
|---|--|
| Address:                                |  |
| /////////////////////////////////////// |  |
| Phone:                                  |  |
| Fax:                                    |  |
| Email:                                  |  |
| Bid Letting Date:                       |  |

# Projects Intending to Bid on:

| Section Number: | Description: |
|-----------------|--------------|
|                 |              |
|                 |              |
|                 |              |
|                 |              |
|                 |              |
|                 |              |

Tazewell County Highway Department 21308 Illinois Route 9 Tremont, IL 61568 p: (309) 925-5532 • f: (309) 925-5533 • jsciortino@tazewell-il.gov



| COVER  | SHEET                         |                           |
|--|-------------------------------|---------------------------|
| Proposal Submitted By:   |                               |                           |
| Contractor's Name  |                               |                           |
|  |                               |                           |
| Contractor's Address   | City                          | State Zip Code            |
|  |                               |                           |
| STATE OF ILLINOIS  |                               |                           |
| Local Public Agency  | County                        | Section Number            |
| Mackinaw Road District   | Tazewell                      | 24-12000-01-GM            |
| Route(s) (Street/Road Name)  |                               | Type of Funds             |
| TR 99A / Runyon Rd   |                               | Township MFT/RBI          |
| Proposal Only Proposal and Plans Proposal only, plans  | are separate                  |                           |
| Submitted/Approved For Local Public Agency: For a County and Road District Project                                       | ForoM                         | unicipal Draigat          |
| For a County and Road District Project   | For a Mi                      | unicipal Project          |
| Submitted/Approved   | Submitted                     | /Approved/Passed          |
| Highway Commissioner Signature & Date  | Signature & Date              |                           |
| Mike Rankin Digitally signed by Mike Rankin Date: 2024.03.07 09:50:25  |                               |                           |
|  |                               |                           |
|  | Official Title                |                           |
| Submitted/Approved   | Official Title                |                           |
| County Engineer/Superintendent of Highways Signature & Date  | Official Title                |                           |
| County Engineer/Superintendent of Highways Signature & Date  |                               | nt of Transportation      |
| County Engineer/Superintendent of Highways Signature & Date  |                               | nt of Transportation      |
| County Engineer/Superintendent of Highways Signature & Date<br>Digitally signed by Dan Parr<br>Date: 2024.03.07 09:50:38 | Departmer<br>Released for bio | d based on limited review |
| County Engineer/Superintendent of Highways Signature & Date<br>Digitally signed by Dan Parr<br>Date: 2024.03.07 09:50:38 | Departmer                     | d based on limited review |

Note: All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed.

| Local Public Agency 0  | County   | Section Number | Route(s) (Street/Road Name) |
|------------------------|----------|----------------|-----------------------------|
| Mackinaw Road District | Tazewell | 24-12000-01-GM | TR 99A / Runyon Rd          |

|                                      | NOTICE TO BIDDERS                                   |                          |                        |
|--------------------------------------|---|--------------------------|------------------------|
| Sealed proposals for the project des | scribed below will be received at the office of $T$ |                          | neer                   |
|                                      |   | Name of Of               | fice                   |
| 21308 Illinois Route 9               | Tremont, Illinois 61568                             | <sub>until</sub> 1:30 PM | <sub>on</sub> 04/15/24 |
|                                      | Address   | Time                     | Date                   |
| Sealed proposals will be opened an   | d read publicly at the office of The Tazewell       | County Engineer          |                        |
| , ,                                  | ,   | Name of Office           |                        |
| 21308 Illinois Route 9               | Tremont, Illinois 61568                             | <sub>at</sub> 1:30 PM    | <sub>on</sub> 04/15/24 |
|                                      | Address   | Time                     | Date                   |
| Location                             | DESCRIPTION OF WORK                                 | 2                        | Project Length         |
| TR 99A / Runyon Rd                   |   |                          | 5343 LF                |
| Proposed Improvement                 |   |                          |                        |
|                                      |   |                          |                        |
| HMA BC IL-9.5 N50, HMA S(            | C IL-9.5 C N50 and related work                     |                          |                        |
| HMA BC IL-9.5 N50, HMA SC            | C IL-9.5 C N50 and related work                     |                          |                        |
| HMA BC IL-9.5 N50, HMA S             |   |                          |                        |

# 21308 Illinois Route 9

### Tremont IL,61568

2. X Prequalification

If checked, the 2 apparent as read low bidders must file within 24 hours after the letting an "Affidavit of Availability" (Form BC 57) in triplicate, showing all uncompleted contracts awarded to them and all low bids pending award for Federal, State, County, Municipal and private work. One original shall be filed with the Awarding Authority and two originals with the IDOT District Office.

- 3. The Awarding Authority reserves the right to waive technicalities and to reject any or all proposals as provided in BLRS Special Provision for Bidding Requirements and Conditions for Contract Proposals.
- 4. The following BLR Forms shall be returned by the bidder to the Awarding Authority:
  - a. Local Public Agency Formal Contract Proposal (BLR 12200)
  - b. Schedule of Prices (BLR 12201)
  - c. Proposal Bid Bond (BLR 12230) (if applicable)
  - d. Apprenticeship or Training Program Certification (BLR 12325) (do not use for project with Federal funds.)
  - e. Affidavit of Illinois Business Office (BLR 12326) (do not use for project with Federal funds)
- 5. The quantities appearing in the bid schedule are approximate and are prepared for the comparison of bids. Payment to the Contractor will be made only for the actual quantities of work performed and accepted or materials furnished according to the contract. The scheduled quantities of work to be done and materials to be furnished may be increased, decreased or omitted as hereinafter provided.
- 6. Submission of a bid shall be conclusive assurance and warranty the bidder has examined the plans and understands all requirements for the performance of work. The bidder will be responsible for all errors in the proposal resulting from failure or neglect to conduct an in depth examination. The Awarding Authority will, in no case, be responsible for any costs, expenses, losses or changes in anticipated profits resulting from such failure or neglect of the bidder.
- 7. The bidder shall take no advantage of any error or omission in the proposal and advertised contract.
- 8. If a special envelope is supplied by the Awarding Authority, each proposal should be submitted in that envelope furnished by the Awarding Agency and the blank spaces on the envelope shall be filled in correctly to clearly indicate its contents. When an envelope other than the special one furnished by the Awarding Authority is used, it shall be marked to clearly indicate its contents. When sent by mail, the sealed proposal shall be addressed to the Awarding Authority at the address and in care of the official in whose office the bids are to be received. All proposals shall be filled prior to the time and at the place specified in the Notice to Bidders. Proposals received after the time specified will be returned to the bidder unopened.
- 9. Permission will be given to a bidder to withdraw a proposal if the bidder makes the request in writing or in person before the time for opening proposals.

| Lo  | cal Public Agency   | County  | Section Number                       | Route(s) (Street/Road Name)   |  |
|-----|---|---|--------------------------------------|---|--|
| M   | ackinaw Road District   | Tazewell  | 24-12000-01-GM                       | TR 99A / Runyon Rd  |  |
|     |   |   | PROPOSAL                             |   |  |
| 1.  | Proposal of   |   |                                      |   |  |
|     |   |   | Contractor's Name                    |   |  |
|     |   | Cc  | ontractor's Address                  |   |  |
| 2   | The plans for the proposed work :   | are those prepared by Tr                                  | ne Tazewell County Highway           | v Department  |  |
| ۷.  | and approved by the Department  | · · · · · <u> </u>  |                                      | Dopartment  |  |
| 3.  |   |   | by the Department of Transportation  | n and designated as "Standard   |  |
| 0.  |   | ge Construction" and the                                  |                                      | Recurring Special Provisions" thereto,  |  |
| 4.  | The undersigned agrees to accept Recurring Special Provisions" co   |   | t, the applicable Special Provisions | indicated on the "Check Sheet for   |  |
| 5.  | 5. The undersigned agrees to complete the work within working days or by 09/01/24unless additional time is granted in accordance with the specifications. |   |                                      |   |  |
| 6.  |   | d is not required, the prop<br>cute a contract and contra | posal guaranty check will be held in | posit a contract bond for the full amount of<br>lieu thereof. If this proposal is accepted<br>greed that the Bid Bond of check shall be |  |
| 7.  | the unit price multiplied by the qu   | antity, the unit price shal                               |                                      | is a discrepancy between the products of<br>the total price will be divided by the<br>it price nor a total price is shown.              |  |
| 8.  | The undersigned submits herewir   | th the schedule of prices                                 | on BLR 12201 covering the work t     | o be performed under this contract.   |  |
| 9.  |   |   |                                      | e combinations on BLR 12201, the work specified in the Schedule for Multiple Bids   |  |
| 10. | A proposal guaranty in the prope  | er amount, as specified ir                                | n BLRS Special Provision for Biddir  | ng Requirements and Conditions for  |  |
|     | Contract Proposals, will be require   | red. Bid Bonds Will                                       | be allowed as a proposal guara       | anty. Accompanying this proposal is either  |  |
|     | a bid bond, if allowed, on Department form BLR 12230 or a proposal guaranty check, complying with the specifications, made payable                        |   |                                      |   |  |
|     |   |   | Treasurer of Tazewell County         | ·   |  |
|     |   |   |                                      | ().   |  |
|     |   |   |                                      |   |  |
|     |   |   |                                      |   |  |
|     |   | Attach Cashier's  | Check or Certified Check Here        |   |  |

In the event that one proposal guaranty check is intended to cover two or more bid proposals, the amount must be equal to the sum of the proposal guaranties which would be required for each individual bid proposal. If the proposal guaranty check is placed in another bid proposal, state below where it may be found.

The proposal guaranty check will be found in the bid proposal for: Section Number

\_ .

| Local Public Agency    | County   | Section Number | Route(s) (Street/Road Name) |
|------------------------|----------|----------------|-----------------------------|
| Mackinaw Road District | Tazewell | 24-12000-01-GM | TR 99A / Runyon Rd          |

## **CONTRACTOR CERTIFICATIONS**

The certifications hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder.

- 1. **Debt Delinquency.** The bidder or contractor or subcontractor, respectively, certifies that it is not delinquent in the payment of any tax administered by the Department of Revenue unless the individual or other entity is contesting, in accordance with the procedure established by the appropriate Revenue Act, its liability for the tax or the amount of the tax. Making a false statement voids the contract and allows the Department to recover all amounts paid to the individual or entity under the contract in a civil action.
- 2. **Bid-Rigging or Bid Rotating**. The bidder or contractor or subcontractor, respectively, certifies that it is not barred from contracting with the Department by reason of a violation of either 720 ILCS 5/33E-3 or 720 ILCS 5/33E-4.

A violation of section 33E-3 would be represented by a conviction of the crime of bid-rigging which, in addition to Class 3 felony sentencing, provides that any person convicted of this offense, or any similar offense of any state or the United States which contains the same elements as this offense shall be barred for 5 years from the date of conviction from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent on behalf of the corporation.

A violation of Section 33E-4 would be represented by a conviction of the crime of bid-rotating which, in addition to Class 2 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be permanently barred from contracting with any unit of State of Local government. No corporation shall be barred from contracting with any unit of State or Local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent on behalf of the corporation.

- 3. **Bribery.** The bidder or contractor or subcontractor, respectively, certifies that, it has not been convicted of bribery or attempting to bribe an officer or employee of the State of Illinois or any unit of local government, nor has the firm made an admission of guilt of such conduct which is a matter or record, nor has an official, agent, or employee of the firm committed bribery or attempted bribery on behalf of the firm and pursuant to the direction or authorization of a responsible official of the firm.
- 4. **Interim Suspension or Suspension.** The bidder or contractor or subcontractor, respectively, certifies that it is not currently under a suspension as defined in Subpart I of Title 44 Subtitle A Chapter III Part 6 of the Illinois Administrative code. Furthermore, if suspended prior to completion of this work, the contract or contracts executed for the completion of this work may be canceled.

| Local Public Agency                   | County               | Section Number          | Route(s) (Stree | t/Road Name) |
|---------------------------------------|----------------------|-------------------------|-----------------|--------------|
| Mackinaw Road District                | Tazewell             | 24-12000-01-GM          | TR 99A / Rui    | nyon Rd      |
|                                       | SIG                  | GNATURES                |                 |              |
| (If an individual)                    |                      | Bidder Signature & Date |                 |              |
|                                       |                      | Business Address        |                 |              |
|                                       |                      | City                    | State           | Zip Code     |
| (If a partnership)                    |                      | Firm Name               |                 |              |
|                                       |                      | Signature & Date        |                 |              |
|                                       |                      | Title                   |                 |              |
|                                       |                      | Business Address        |                 |              |
|                                       |                      | City                    | State           | Zip Code     |
| Insert the Names and Addresses of all | Partners             |                         |                 |              |
|                                       |                      |                         |                 |              |
|                                       |                      |                         |                 |              |
| (If a corporation)                    |                      | Corporate Name          |                 |              |
|                                       |                      | Signature & Date        |                 |              |
|                                       |                      | Title                   |                 |              |
|                                       |                      | Business Address        |                 |              |
|                                       |                      | City                    | State           | Zip Code     |
| Inse                                  | rt Names of Officers | President               |                 | л            |
|                                       |                      |                         |                 |              |

Secretary

Attest:

Treasurer

Secretary





#### Contractor's Name

| Contractor's Address        | City |          | State     | zip Code |
|-----------------------------|------|----------|-----------|----------|
|                             |      |          |           |          |
| Local Public Agency         |      | County   | Section N | lumber   |
| Mackinaw Road District      |      | Tazewell | 24-1200   | 00-01-GM |
| Route(s) (Street/Road Name) |      |          |           |          |
| TR 99A / Runyon Rd          |      |          |           |          |

#### Schedule for Multiple Bids

| Combination Letter | Section Included in Combinations | Total |
|--------------------|----------------------------------|-------|
|                    |                                  |       |
|                    |                                  |       |
|                    |                                  |       |
|                    |                                  |       |
|                    |                                  |       |

#### Schedule for Single Bid

(For complete information covering these items, see plans and specifications.)

| Item Number | Items                   | Unit  | Quantity | Unit Price            | Total |
|-------------|-------------------------|-------|----------|-----------------------|-------|
| 1           | HMA SURF REM BUTT JOINT | SQ YD | 517      |                       |       |
| 2           | TEMPORARY RAMP          | SQ YD | 41       |                       |       |
| 3           | P BIT MATLS TACK CT     | POUND | 18243    |                       |       |
| 4           | HMA BC IL-9.5 N50       | TON   | 689      |                       |       |
| 5           | HMA SC IL-9.5 C N50     | TON   | 1034     |                       |       |
| 6           | INCIDENTAL HMA SURF     | TON   | 50       |                       |       |
| 7           | TRAF CONT & PROT SPL    | L SUM | 1        |                       |       |
|             |                         |       |          |                       |       |
|             |                         |       |          |                       |       |
|             |                         |       |          |                       |       |
|             |                         |       |          |                       |       |
|             |                         |       |          |                       |       |
|             |                         |       |          |                       |       |
|             |                         |       |          |                       |       |
|             |                         |       |          |                       |       |
| L           |                         | 1     | Bi       | dder's Total Proposal |       |

- 1. Each pay item should have a unit price and a total price.
- 2. If no total price is shown or if there is a discrepancy between the product of the unit price multiplied by the quantity, the unit price shall govern.
- 3. If a unit price is omitted, the total price will be divided by the quantity in order to establish a unit price.
- 4. A bid may be declared unacceptable if neither a unit price or total price is shown.



# Local Public Agency **Proposal Bid Bond**

| Local Public Agency    | County   | Section Number   |
|------------------------|----------|------------------|
| Mackinaw Road District | Tazewell | 24-12000-01-GM   |
| WE,                    |          | as PRINCIPAL and |

#### as PRINCIPAL, and

as SURETY, are held jointly,

severally and firmly bound unto the above Local Public Agency (hereafter referred to as "LPA") in the penal sum of 5% of the total bid price, or for the amount specified in the proposal documents in effect on the date of invitation for bids, whichever is the lesser sum. We bind ourselves, our heirs, executors, administrators, successors, and assigns, jointly pay to the LPA this sum under the conditions of this instrument.

WHEREAS THE CONDITION OF THE FOREGOING OBLIGATION IS SUCH that, the said PRINCIPAL is submitting a written proposal to the LPA acting through its awarding authority for the construction of the work designated as the above section.

THEREFORE if the proposal is accepted and a contract awarded to the PRINCIPAL by the LPA for the above designated section and the PRINCIPAL shall within fifteen (15) days after award enter into a formal contract, furnish surety guaranteeing the faithful performance of the work, and furnish evidence of the required insurance coverage, all as provided in the "Standard Specifications for Road and Bridge Construction" and applicable Supplemental Specifications, then this obligation shall become void; otherwise it shall remain in full force and effect.

IN THE EVENT the LPA determines the PRINCIPAL has failed to enter into a formal contract in compliance with any requirements set forth in the preceding paragraph, then the LPA acting through its awarding authority shall immediately be entitled to recover the full penal sum set out above, together with all court costs, all attorney fees, and any other expense of recovery.

IN TESTIMONY WHEREOF, the said PRINCIPAL and the said SURETY have caused this instrument to be signed by their respective officers this of

| Day  | Month and Year Principal  |
|--|---|
| Company Name                               | Company Name  |
| Signature & Date By:                       | Signature & Date By:  |
| Title                                      | Title   |
|  | ontractors, the company names, and authorized signatures of each contractor must be   |
| affixed.)                                  | Surety  |
| Name of Surety                             | Signature of Attorney-in-Fact Signature & Date By:  |
| STATE OF IL                                |   |
| COUNTY OF                                  |   |
| I  | , a Notary Public in and for said county do hereby certify that   |
| (Insert na                                 | mes of individuals signing on behalf of PRINCIPAL & SURETY)   |
|  | the same persons whose names are subscribed to the foregoing instrument on behalf of the this day in person and acknowledged respectively, that they signed and delivered said the uses and purposes therein set forth. |
| Given under my hand and notarial seal this | day of<br>DayMonth and Year   |
| (SEAL, if required by the                  | ,   |
|  | Date commission expires   |

| Local Public Agency    | County   | Section Number |
|------------------------|----------|----------------|
| Mackinaw Road District | Tazewell | 24-12000-01-GM |

ELECTRONIC BID BOND

#### Electronic bid bond is allowed (box must be checked by LPA if electronic bid bond is allowed)

The Principal may submit an electronic bid bond, in lieu of completing the above section of the Proposal Bid Bond Form. By providing an electronic bid bond ID code and signing below, the Principal is ensuring the identified electronic bid bond has been executed and the Principal and Surety are firmly bound unto the LPA under the conditions of the bid bond as shown above. (If PRINCIPAL is a joint venture of two or more contractors, an electronic bid bond ID code, company/Bidder name title and date must be affixed for each contractor in the venture.)

Electronic Bid Bond ID Code

Company/Bidder Name

Signature & Date

Title





For the Letting of 04/15/24

Bureau of Construction 2300 South Dirksen Parkway/Room 322 Springfield, IL 62764 Instructions: Complete this form by either typing or using black ink. "Authorization to Bid" will not be issued unless both sides of this form are completed in detail. Use additional forms as needed to list all work.

#### Part I. Work Under Contract

List below all work you have under contract as either a prime contractor or a subcontractor. It is required to include all pending low bids not yet awarded or rejected. In a joint venture, list only that portion of the work which is the responsibility of your company. The uncompleted dollar value is to be based upon the most recent engineer's or owners estimate, and must include work subcontracted to others. If no work is contracted, show NONE.

|  | 1 | 2 | 3 | 4 | Awards<br>Pending | Accumulated<br>Totals |  |
|--|---|---|---|---|-------------------|-----------------------|--|
| Contract Number  |   |   |   |   |                   |                       |  |
| Contract With  |   |   |   |   |                   |                       |  |
| Estimated Completion Date                                |   |   |   |   |                   |                       |  |
| Total Contract Price                                     |   |   |   |   |                   |                       |  |
| Uncompleted Dollar Value if Firm is the Prime Contractor |   |   |   |   |                   |                       |  |
| Uncompleted Dollar Value if Firm is the Subcontractor    |   |   |   |   |                   |                       |  |
| Total Value of All Work                                  |   |   |   |   |                   |                       |  |

#### Part II. Awards Pending and Uncompleted Work to be done with your own forces.

List below the uncompleted dollar value of work for each contract and awards pending to be completed with your own forces. All work subcontracted to others will be listed on the reverse of this form. In a joint venture, list only that portion of the work to be done by your company. If no work is contracted, show NONE.

| Earthwork                           |      |      |      |
|-------------------------------------|------|------|------|
| Portland Cement Concrete Paving     |      |      |      |
| HMA Plant Mix                       |      |      |      |
| HMA Paving                          |      |      |      |
| Clean & Seal Cracks/Joints          |      |      |      |
| Aggregate Bases, Surfaces           |      |      |      |
| Highway, R.R., Waterway Struc.      |      |      |      |
| Drainage                            |      |      |      |
| Electrical                          |      |      |      |
| Cover and Seal Coats                |      |      |      |
| Concrete Construction               |      |      |      |
| Landscaping                         |      |      |      |
| Fencing                             |      |      |      |
| Guardrail                           |      |      |      |
| Painting                            |      |      |      |
| Signing                             |      |      |      |
| Cold Milling, Planning, Rotomilling |      |      |      |
| Demolition                          |      |      |      |
| Pavement Markings (Paint)           |      |      |      |
| Other Construction (List)           |      |      |      |
|                                     | <br> | <br> | <br> |
|                                     |      |      |      |
|                                     | <br> | <br> | <br> |
| Totals                              |      |      |      |
|                                     |      |      | <br> |

Disclosure of this information is REQUIRED to accomplish the statutory purpose as outlined in the "Illinois Procurement Code." Failure to comply will result in non-issuance of an "Authorization To Bid." This form has been approved by the State Forms Management Center.

#### Part III. Work Subcontracted to Others.

For each contract described in Part I, list all the work you have subcontracted to others.

|                    | 1 | 2 | 3 | 4 | Awards Pending |
|--------------------|---|---|---|---|----------------|
| Subcontractor      |   |   |   |   |                |
| Type of Work       |   |   |   |   |                |
| Subcontract Price  |   |   |   |   |                |
| Amount Uncompleted |   |   |   |   |                |
| Subcontractor      |   |   |   |   |                |
| Type of Work       |   |   |   |   |                |
| Subcontract Price  |   |   |   |   |                |
| Amount Uncompleted |   |   |   |   |                |
| Subcontractor      |   |   |   |   |                |
| Type of Work       |   |   |   |   |                |
| Subcontract Price  |   |   |   |   |                |
| Amount Uncompleted |   |   |   |   |                |
| Subcontractor      |   |   |   |   |                |
| Type of Work       |   |   |   |   |                |
| Subcontract Price  |   |   |   |   |                |
| Amount Uncompleted |   |   |   |   |                |
| Subcontractor      |   |   |   |   |                |
| Type of Work       |   |   |   |   |                |
| Subcontract Price  |   |   |   |   |                |
| Amount Uncompleted |   |   |   |   |                |

#### Total Uncompleted

#### Notary

I, being duly sworn, do hereby declare this affidavit is a true and correct statement relating to ALL uncompleted contracts of the undersigned for Federal, State, County, City and private work, including ALL subcontract work, ALL pending low bids not yet awarded or rejected and ALL estimated completion dates.

| Officer or Director |                |
|---------------------|----------------|
|                     |                |
| Title               |                |
|                     |                |
| Signature           | Date           |
|                     |                |
|                     |                |
| Company             |                |
|                     |                |
| Address             |                |
|                     |                |
| City                | State Zip Code |
|                     |                |
|                     |                |

| Subscribed and sworn to before me<br>this day of , |
|--|
| (Signature of Notary Public) My commission expires |
|  |
|  |
| (Notary Seal)                                      |

Add pages for additional contracts



# Apprenticeship and Training Program Certification

| Local Public Agency    | County   | Street Name/Road Name | Section Number |
|------------------------|----------|-----------------------|----------------|
| Mackinaw Road District | Tazewell | TR 99A / Runyon Rd    | 24-12000-01-GM |

All contractors are required to complete the following certification

For this contract proposal or for all bidding groups in this deliver and install proposal.

For the following deliver and install bidding groups in this material proposal.

Illinois Department of Transportation policy, adopted in accordance with the provisions of the Illinois Highway Code, requires this contract to be awarded to the lowest responsive and responsible bidder. The award decision is subject to approval by the Department. In addition to all other responsibility factors, this contract or deliver and install proposal requires all bidders and all bidder's subcontractors to disclose participation in apprenticeship or training programs that are (1) approved by and registered with the United States Department of Labor's Bureau of Apprenticeship and Training, and (2) applicable to the work of the above indicated proposals or groups. Therefore, all bidders are required to complete the following certification:

1. Except as provided in paragraph 4 below, the undersigned bidder certifies that it is a participant, either as an individual or as part of a group program, in an approved apprenticeship or training program applicable to each type of work or craft that the bidder will perform with its own employees.

2. The undersigned bidder further certifies, for work to be performed by subcontract, that each of its subcontractors either (A) is, at the time of such bid, participating in an approved, applicable apprenticeship or training program; or (B) will, prior to commencement of performance of work pursuant to this contract, establish participation in an approved apprenticeship or training program applicable to the work of the subcontract.

3. The undersigned bidder, by inclusion in the list in the space below, certifies the official name of each program sponsor holding the Certificate of Registration for all of the types of work or crafts in which the bidder is a participant and that will be performed with the bidder's employees. Types of work or craft that will be subcontracted shall be included and listed as subcontract work. The list shall also indicate any type of work or craft job category for which there is no applicable apprenticeship or training program available.

4. Except for any work identified above, if any bidder or subcontractor shall perform all or part of the work of the contract or deliver and install proposal solely by individual owners, partners or members and not by employees to whom the payment of prevailing rates of wages would be required, check the following box, and identify the owner/operator workforces and positions of ownership.

The requirements of this certification and disclosure are a material part of the contract, and the contractor shall require this certification provision to be included in all approved subcontracts. The bidder is responsible for making a complete report and shall make certain that each type of work or craft job category that will be utilized on the project is accounted for and listed. The Department at any time before or afterward may require the production of a copy of each applicable Certificate of Registration issued by the United States Department of Labor evidencing such participation by the contractor and any or all of its subcontractors. In order to fulfill the participation requirement, it shall not be necessary that any applicable program sponsor be currently taking or that it will take applications for apprenticeship, training or employment during the performance of the work of this contract or deliver and install proposal.

| Bidder  |      | Signature & Date |       |          |
|---------|------|------------------|-------|----------|
|         |      |                  |       |          |
| Title   |      |                  |       |          |
|         |      |                  |       |          |
| Address | City |                  | State | Zip Code |
|         |      |                  |       |          |



# Affidavit of Illinois Business Office

| Local Public Agency                                   | County           | 5           | Street Name/Road Name        | ;         | Section Number                  |
|---|------------------|-------------|------------------------------|-----------|---------------------------------|
| Mackinaw Road District                                | Tazewell         | -           | FR 99A / Runyon Rd           | l         | 24-12000-01-GM                  |
|   | of               | ı L         |                              |           |                                 |
| I,Name of Affiant                                     | 0                |             | City of Affiant              | ,         | , State of Affiant              |
| being first duly sworn upon oath, state as follows:   |                  |             |                              |           |                                 |
| 1. That I am the                                      | of               |             |                              |           |                                 |
| Officer or Position                                   | 0                |             | Bidder                       |           |                                 |
| 2. That I have personal knowledge of the facts here   | rein stated.     |             |                              |           |                                 |
| 3. That, if selected under the proposal described a   | above,           |             |                              | , will ma | intain a business office in the |
|   |                  |             | Bidder                       | -         |                                 |
| State of Illinois, which will be located in           | County           | County,     | Illinois.                    |           |                                 |
| 4. That this business office will serve as the prima  |                  | olovmont fo | any parsons amployed         | in the co | actruction contomplated by      |
| this proposal.  | i y place of emp | Joyment Io  | any persons employed         |           | istruction contemplated by      |
| 5. That this Affidavit is given as a requirement of s | state law as pro | vided in Se | ction 30-22(8) of the Illing | ois Procu | rement Code                     |
| o   |                  |             | Signature & Date             |           |                                 |
|   |                  |             |                              |           |                                 |
|   |                  |             |                              |           |                                 |
|   |                  |             |                              |           |                                 |
|   |                  |             | Print Name of Affiant        |           |                                 |
|   |                  |             |                              |           |                                 |
|   |                  |             |                              |           |                                 |
|   |                  |             |                              |           |                                 |
| Notary Public   |                  |             |                              |           |                                 |
| State of IL   |                  |             |                              |           |                                 |
| County  |                  |             |                              |           |                                 |
|   |                  | h           |                              |           |                                 |
| Signed (or subscribed or attested) before me on       | (date)           | by          |                              |           |                                 |
|   | ( )              |             |                              |           | , authorized agent(s) of        |
| (nam  | e/s of person/s) |             |                              |           | , autionzed ageni(s) of         |
| · ·   | . ,              |             |                              |           |                                 |
| Bidder  |                  |             |                              |           |                                 |
|   |                  |             |                              |           |                                 |
|   |                  |             |                              |           |                                 |
|   |                  |             | Notary Public S              | Signature | & Date                          |
|   |                  |             |                              |           |                                 |
|   |                  |             |                              |           |                                 |
|   |                  |             |                              |           |                                 |
| (SEAL)  |                  |             | My commission                | expires   |                                 |
|   |                  |             |                              |           |                                 |

#### INDEX FOR SUPPLEMENTAL SPECIFICATIONS AND RECURRING SPECIAL PROVISIONS

#### Adopted January 1, 2024

This index contains a listing of SUPPLEMENTAL SPECIFICATIONS and frequently used RECURRING SPECIAL PROVISIONS.

#### ERRATA Standard Specifications for Road and Bridge Construction

(Adopted 1-1-22) (Revised 1-1-24)

#### SUPPLEMENTAL SPECIFICATIONS

| Std. Spe | ec. Sec.                              | Page No. |
|----------|---------------------------------------|----------|
| 202      | Earth and Rock Excavation             |          |
| 204      | Borrow and Furnished Excavation       |          |
| 207      | Porous Granular Embankment            | 3        |
| 211      | Topsoil and Compost                   |          |
| 407      | Hot-Mix Asphalt Pavement (Full-Depth) | 5        |
| 420      | Portland Cement Concrete Pavement     |          |
| 502      | Excavation for Structures             |          |
| 509      | Metal Railings                        |          |
| 540      | Box Culverts                          | 9        |
| 542      | Pipe Culverts                         |          |
| 586      | Granular Backfill for Structures      |          |
| 630      | Steel Plate Beam Guardrail            |          |
| 644      | High Tension Cable Median Barrier     | 36       |
| 665      | Woven Wire Fence                      |          |
| 782      | Reflectors                            | 38       |
| 801      | Electrical Requirements               | 40       |
| 821      | Roadway Luminaires                    | 43       |
| 1003     | Fine Aggregates                       | 44       |
| 1004     | Coarse Aggregates                     | 45       |
| 1010     | Finely Divided Minerals               |          |
| 1020     | Portland Cement Concrete              | 47       |
| 1030     | Hot-Mix Asphalt                       | 48       |
| 1061     | Waterproofing Membrane System         |          |
| 1067     | Luminaire                             | 50       |
| 1097     | Reflectors                            | 57       |



# **Check Sheet for Recurring Special Provisions**

| Local Public Agency    | County   | Section Number |
|------------------------|----------|----------------|
| Mackinaw Road District | Tazewell | 24-12000-01-GM |

# Check this box for lettings prior to 01/01/2024.

The Following Recurring Special Provisions Indicated By An "X" Are Applicable To This Contract And Are Included By Reference:

|     |             | Recurring Special Provisions   |                 |
|-----|-------------|--|-----------------|
| Che | eck Sheet # |  | <u>Page No.</u> |
| 1   |             | Additional State Requirements for Federal-Aid Construction Contracts | 59              |
| 2   |             | Subletting of Contracts (Federal-Aid Contracts)                      | 62              |
| 3   |             | EEO  | 63              |
| 4   |             | Specific EEO Responsibilities Non Federal-Aid Contracts              | 73              |
| 5   |             | Required Provisions - State Contracts                                | 78              |
| 6   |             | Asbestos Bearing Pad Removal   | 84              |
| 7   |             | Asbestos Waterproofing Membrane and Asbestos HMA Surface Removal     | 85              |
| 8   |             | Temporary Stream Crossings and In-Stream Work Pads                   | 86              |
| 9   |             | Construction Layout Stakes   | 87              |
| 10  |             | Use of Geotextile Fabric for Railroad Crossing                       | 90              |
| 11  |             | Subsealing of Concrete Pavements                                     | 92              |
| 12  |             | Hot-Mix Asphalt Surface Correction                                   | 96              |
| 13  |             | Pavement and Shoulder Resurfacing                                    | 98              |
| 14  |             | Patching with Hot-Mix Asphalt Overlay Removal                        | 99              |
| 15  |             | Polymer Concrete   | 101             |
| 16  |             | Reserved   | 103             |
| 17  |             | Bicycle Racks  | 104             |
| 18  |             | Temporary Portable Bridge Traffic Signals                            | 106             |
| 19  |             | Nighttime Inspection of Roadway Lighting                             | 108             |
| 20  |             | English Substitution of Metric Bolts                                 | 109             |
| 21  |             | Calcium Chloride Accelerator for Portland Cement Concrete            | 110             |
| 22  |             | Quality Control of Concrete Mixtures at the Plant                    | 111             |
| 23  |             | Quality Control/Quality Assurance of Concrete Mixtures               | 119             |
| 24  |             | Reserved   | 135             |
| 25  |             | Reserved   | 136             |
| 26  |             | Temporary Raised Pavement Markers                                    | 137             |
| 27  |             | Restoring Bridge Approach Pavements Using High-Density Foam          | 138             |
| 28  |             | Portland Cement Concrete Inlay or Overlay                            | 141             |
| 29  |             | Portland Cement Concrete Partial Depth Hot-Mix Asphalt Patching      | 145             |
| 30  |             | Longitudinal Joint and Crack Patching                                | 148             |
| 31  |             | Concrete Mix Design - Department Provided                            | 150             |
| 32  |             | Station Numbers in Pavements or Overlays                             | 151             |

| Local Public Agency    | County   | Section Number |
|------------------------|----------|----------------|
| Mackinaw Road District | Tazewell | 24-12000-01-GM |

The Following Local Roads And Streets Recurring Special Provisions Indicated By An "X" Are Applicable To This Contract And Are Included By Reference:

#### Local Roads And Streets Recurring Special Provisions

| Check Shee | <u>t #</u>   | <u>Page No.</u> |
|------------|--|-----------------|
| LRS 1      | Reserved   | 153             |
| LRS 2      | Furnished Excavation                                       | 154             |
| LRS 3      | Work Zone Traffic Control Surveillance                     | 155             |
| LRS 4      | Flaggers in Work Zones                                     | 156             |
| LRS 5      | Contract Claims  | 157             |
| LRS 6      | Bidding Requirements and Conditions for Contract Proposals | 158             |
| LRS 7      | Bidding Requirements and Conditions for Material Proposals | 164             |
| LRS 8      | Reserved   | 170             |
| LRS 9      | Bituminous Surface Treatments                              | 171             |
| LRS 10     | Reserved   | 175             |
| LRS 11 🛛 🔀 | Employment Practices                                       | 176             |
| LRS 12     | Wages of Employees on Public Works                         | 178             |
| LRS 13 🛛 🔀 | Selection of Labor   | 180             |
| LRS 14     | Paving Brick and Concrete Paver Pavements and Sidewalks    | 181             |
| LRS 15     | Partial Payments   | 184             |
| LRS 16     | Protests on Local Lettings                                 | 185             |
| LRS 17 🛛 🔀 | Substance Abuse Prevention Program                         | 186             |
| LRS 18     | Multigrade Cold Mix Asphalt                                | 187             |
| LRS 19     | Reflective Crack Control Treatment                         | 188             |
|            |  |                 |

# **TABLE OF CONTENTS**

| Page 1 Bidding Requirement<br>Description of Work<br>Traffic<br>Traffic Control Plan<br>Hot-Mix Asphalt Bin |  |
|---|--|
| Page 2Substitution of Bitum   |  |
| -   | rface Removal- Butt Joint                    |
| Incidental Hot-Mix A  | Asphalt Surfacing                            |
| Weight Limits   |  |
| General Notes   |  |
| Pre-Construction Me   | eting  |
| Time Schedule   |  |
| Wages of Employees  | s on Public Works                            |
| Page 3-4 BDE Special Provisi  | ons Check Sheets                             |
| Page 5-17 BDE Special Provisi   | ons  |
| Page 18-24 LR Special Provision   | 18   |
| Page 25 Project Location Ma   | p  |
| Page 26 Quantity Sheet  | -  |
| Page 27 Typical Cross Sectio  | n  |
|   | urfacing at Sideroads, Entrances & Mailboxes |
| Page 29-31 Butt Joints  |  |
| Page 32-39Traffic Control Stand   | dards  |





| Local Public Agency |                  | County   | Section Number |
|---------------------|------------------|----------|----------------|
| Mackina             | aw Road District | Tazewell | 24-12000-01-GM |

The following Special Provision supplement the "Standard Specifications for Road and Bridge Construction", adopted

January 1, 2022

, the latest edition of the "Manual on Uniform Traffic Control Devices for

Streets and Highways", and the "Manual of Test Procedures of Materials" in effect on the date of invitation of bids, and the Supplemental Specification and Recurring Special Provisions indicated on the Check Sheet included here in which apply to and govern the construction of the above named section, and in case of conflict with any parts, or parts of said Specifications, the said Special Provisions shall take precedence and shall govern.

**<u>BIDDING REQUIREMENTS AND CONDITIONS</u>**: Prequalification of bidders with the Illinois Department of Transportation is required.

**DESCRIPTION OF WORK:** The work of this section consists of Hot-Mix Asphalt Surface Removal- Butt Joint; Hot-Mix Asphalt Base Course, IL-9.5, N50; Surface Course, IL-9.5, Mix "C", N50 and related operations on top of existing bituminous surface.

**TRAFFIC:** TR 99A Runyon Rd shall remain open for both local and through traffic at all times. The Mackinaw Township Highway Commissioner shall be notified a minimum 48 hours in advance of the start of construction to properly notify the property owners along the construction improvement route.

**TRAFFIC CONTROL PLAN:** Traffic Control shall be in accordance with the applicable sections of the "Standard Specifications for Road and Bridge Construction", the applicable guidelines contained in the "Manual on Uniform Traffic Control Devices for Streets and Highways", these Special Provisions, and any special details and Highway Standards contained herein and in the plans.

Special attention is called to Articles 107.09 and 107.14 of the "Standard Specifications for Road and Bridge Construction" and the Traffic Control Standards 701006-05, 701011-04, 701201-05, 701301-04, 701306-04 and 701901-08 contained herein.

The presence of temporary traffic control drawings or standards in the proposal or contract, whether a pay item or not, does not relieve the Contractor of his obligation to the public. The Contractor shall provide, if conditions warrant by the Engineer, all protection deemed necessary beyond that shown in the proposal or Special Provisions.

"NO PASSING ZONES NOT STRIPED NEXT\_\_\_\_\_ MILES" signs shall be posted in accordance with Article 701.17.

Construction signs shall meet the current Standard Specifications for Traffic Control Items.

Basis of payment: All required Traffic Control shall be paid for at the contract-lump sum price for TRAFFIC CONTROL & PROTECTION, (SPECIAL).

**HOT-MIX ASPHALT BINDER COURSE:** This work shall be constructed in accordance with Article 406 of the "Standard Specifications for Road and Bridge Construction" except that the minimum lift thickness shall be 1 inch for HOT-MIX ASPHALT BINDER COURSE IL 9.5 N50 as specified on the typical cross section elsewhere herein.

| Local Public Agency    | County   | Section Number |
|------------------------|----------|----------------|
| Mackinaw Road District | Tazewell | 24-12000-01-GM |

**SUBSTITUTION OF BITUMINOUS MIXTURES:** Bituminous Mixtures of a higher quality may be substituted for the designs specified at the approval of the Engineer. The contractor shall provide the Engineer with an approved mix design at least 24 hours prior to its use for his review. Use of the proposed substitute mix shall be solely at the discretion of the Engineer. The new mixture will be measured and paid for under the same applicable articles as the mixture for which it is substituted.

# HOT-MIX ASPHALT SURFACE REMOVAL- BUTT JOINT:

The surface removal shall be performed according to Article 406.08 and Section 440.

Revise Article 440.06 Disposal of Material to read as follows: All milled material shall remain the property of the Mackinaw Township Road District and shall be transported from the job site to 33673 Fast Ave, Mackinaw, Illinois. Other sites may be determined by mutual agreement between the Contractor and the Road District. If other sites are approved, the Contractor will be responsible for preventing theft of milled material or unauthorized removal of said material from sites other than Mackinaw Township Road District property.

Add the following to Article 440.08 Basis of Payment: Hauling of milled material shall be included in the cost of HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT and no extra compensation will be allowed.

**INCIDENTAL HOT-MIX ASPHALT SURFACING:** Any preparation required prior to construction of INCIDENTAL HOT-MIX ASPHALT SURFACING will not be measured separately but shall be included in the contract unit price per ton for INCIDENTAL HOT-MIX ASPHALT SURFACING. To prevent damage to newly constructed bituminous surfaces, it is understood that an interval of up to one week shall lapse before incidental hot-mix asphalt surfacing operations begin, depending on weather and curing conditions, as directed by the Engineer.

WEIGHT LIMITS: Legal weight limits shall be observed on Mackinaw Road District roads and structures they contain at all times.

<u>GENERAL NOTES</u>: Where section or subsection monuments are encountered, the Engineer shall be notified before such monuments are removed. The Contractor shall protect and carefully preserve all property markers and monuments until the owner, and authorized surveyor or agent has witnessed or otherwise referenced their location.

**PRE-CONSTRUCTION MEETING:** A pre-construction meeting for this Section is required between the Contractor, Highway Commissioner and the Resident Engineer.

TIME SCHEDULE: The specified completion date for this project is September 1, 2024.

WAGES OF EMPLOYEES ON PUBLIC WORKS: Add the following to paragraph #1 of the Special Provision for Wages of Employees on Public Works, Check Sheet LRS#12: Prevailing wage rates may be obtained from the IDOL (Illinois Department of Labor) website at:

https://www2.illinois.gov/idol/Laws-Rules/CONMED/Pages/Rates.aspx

#### BDE SPECIAL PROVISIONS For the April 26 and June 14, 2024 Lettings

The following special provisions indicated by a "check mark" are applicable to this contract and will be included by the Project Coordination and Implementation Section of the Bureau of Design & Environment (BDE).

| Eil      |                        | #  |                         | Special Dravision Title   | Effective                    | Povisod       |
|----------|------------------------|----|-------------------------|---|------------------------------|---------------|
| <u> </u> | <u>e Name</u><br>80099 |    |                         | Special Provision Title<br>Accessible Pedestrian Signals (APS)    | April 1, 2003                | Revised       |
|          |                        |    | H                       |   |                              | Jan. 1, 2022  |
|          | 80274                  |    | H                       | Aggregate Subgrade Improvement                                    | April 1, 2012                | April 1, 2022 |
|          | 80192                  |    | H                       | Automated Flagger Assistance Devices                              | Jan. 1, 2008                 | April 1, 2023 |
|          | 80173                  |    | Ц                       | Bituminous Materials Cost Adjustments                             | Nov. 2, 2006                 | Aug. 1, 2017  |
|          | 80426                  |    | Ц                       | Bituminous Surface Treatment with Fog Seal                        | Jan. 1, 2020                 | Jan. 1, 2022  |
| *        | 80241                  |    | Ц                       | Bridge Demolition Debris  | July 1, 2009                 |               |
| *        |                        | 7  | Ц                       | Building Removal  | Sept. 1, 1990                | Aug. 1, 2022  |
| *        | 50261                  | 8  |                         | Building Removal with Asbestos Abatement                          | Sept. 1, 1990                | Aug. 1, 2022  |
|          | 80449                  |    |                         | Cement, Type IL   | Aug. 1, 2023                 |               |
|          |                        | 10 | $\checkmark$            | Compensable Delay Costs   | June 2, 2017                 | April 1, 2019 |
| *        | 80198                  | 11 |                         | Completion Date (via calendar days)                               | April 1, 2008                |               |
| *        | 80199                  | 12 |                         | Completion Date (via calendar days) Plus Working Days             | April 1, 2008                |               |
|          | 80453                  | 13 |                         | Concrete Sealer   | Nov. 1, 2023                 |               |
|          | 80261                  | 14 |                         | Construction Air Quality – Diesel Retrofit                        | June 1, 2010                 | Nov. 1, 2014  |
|          | 80434                  | 15 |                         | Corrugated Plastic Pipe (Culvert and Storm Sewer)                 | Jan. 1, 2021                 |               |
| *        | 80029                  | 16 | Π                       | Disadvantaged Business Enterprise Participation                   | Sept. 1, 2000                | Mar. 2, 2019  |
|          | 80229                  | 17 | $\Box$                  | Fuel Cost Adjustment  | April 1, 2009                | Aug. 1, 2017  |
|          | 80452                  |    | Π                       | Full Lane Sealant Waterproofing System                            | Nov. 1, 2023                 | <b>J</b>      |
|          | 80447                  |    | Ē                       | Grading and Shaping Ditches                                       | Jan. 1, 2023                 |               |
|          | 80433                  |    | П                       | Green Preformed Thermoplastic Pavement Markings                   | Jan. 1, 2021                 | Jan. 1, 2022  |
|          | 80443                  |    | П                       | High Tension Cable Median Barrier Removal                         | April 1, 2022                | •             |
|          | 80456                  |    | $\checkmark$            | Hot-Mix Asphalt   | Jan. 1, 2024                 |               |
|          | 80446                  |    | H                       | Hot-Mix Asphalt - Longitudinal Joint Sealant                      | Nov. 1, 2022                 | Aug. 1, 2023  |
|          | 80438                  |    |                         | Illinois Works Apprenticeship Initiative – State Funded Contracts | June 2, 2021                 | April 2, 2024 |
|          | 80045                  |    | Π                       | Material Transfer Device  | June 15, 1999                | Jan. 1, 2022  |
|          | 80450                  |    | Н                       | Mechanically Stabilized Earth Retaining Walls                     | Aug. 1, 2023                 |               |
|          | 80441                  |    | $\overline{\mathbf{V}}$ | Performance Graded Asphalt Binder                                 | Jan. 1, 2023                 |               |
|          | 80451                  |    | Ħ                       | Portland Cement Concrete  | Aug. 1, 2023                 |               |
| *        | 34261                  | 29 | H                       | Railroad Protective Liability Insurance                           | Dec. 1, 1986                 | Jan. 1, 2022  |
|          | 80455                  |    | $\checkmark$            | Removal and Disposal of Regulated Substances                      | Jan. 1, 2024                 | April 1, 2024 |
|          | 80445                  |    | H                       | Seeding   | Nov. 1, 2024                 | 7.0111, 2024  |
|          | 80457                  |    |                         | Short Term and Temporary Pavement Markings                        | April 1, 2024                |               |
|          |                        | 33 | Н                       | Source of Supply and Quality Requirements                         | Jan. 2, 2023                 |               |
|          | 80340                  |    | H                       | Speed Display Trailer   | April 2, 2014                | Jan. 1, 2022  |
|          | 80127                  |    | H                       | Steel Cost Adjustment   | April 2, 2014                | Jan. 1, 2022  |
|          | 80397                  |    | H                       | Subcontractor and DBE Payment Reporting                           | April 2, 2004                | Jan. 1, 2022  |
|          | 80391                  |    | H                       | Subcontractor Mobilization Payments                               | Nov. 2, 2017                 | April 1, 2019 |
|          | 80437                  |    | H                       | Submission of Payroll Records                                     | April 1, 2021                | Nov. 2, 2023  |
|          | 80437                  |    | H                       | Surface Testing of Pavements – IRI                                | Jan. 1, 2021                 | Jan. 1, 2023  |
|          | 80433                  |    | H                       | Traffic Spotters  | Jan. 1, 2021<br>Jan. 1, 2019 | Jan. 1, 2025  |
| *        |                        |    | H                       |   |                              | Sont 2 2021   |
|          | 20338<br>80429         |    | H                       | Training Special Provisions<br>Ultra-Thin Bonded Wearing Course   | Oct. 15, 1975                | Sept. 2, 2021 |
|          | 80429<br>80439         |    | H                       |   | April 1, 2020                | Jan. 1, 2022  |
|          |                        |    |                         | Vehicle and Equipment Warning Lights                              | Nov. 1, 2021                 | Nov. 1, 2022  |
|          | 80302                  |    | H                       | Weekly DBE Trucking Reports                                       | June 2, 2012                 | Nov. 1, 2021  |
|          | 80454                  |    | 님                       | Wood Sign Support   | Nov. 1, 2023                 |               |
| *        | 80427                  |    | H                       | Work Zone Traffic Control Devices                                 | Mar. 2, 2020                 |               |
|          | 80071                  | 4/ |                         | Working Days  | Jan. 1, 2002                 |               |

Highlighted items indicate a new or revised special provision for the letting.

An \* indicates the special provision requires additional information from the designer, which needs to be submitted separately. The Project Coordination and Implementation Section will then include the information in the applicable special provision.

The following special provisions are in the 2024 Supplemental Specifications and Recurring Special Provisions.

| <u>File Name</u> | Special Provision Title         | New Location(s)            | <b>Effective</b> | <u>Revised</u> |
|------------------|---------------------------------|----------------------------|------------------|----------------|
| 80436            | Blended Finely Divided Minerals | Articles 1010.01 & 1010.06 | April 1, 2021    |                |
| 80440            | Waterproofing Membrane System   | Article 1061.05            | Nov. 1, 2021     |                |

## COMPENSABLE DELAY COSTS (BDE)

Effective: June 2, 2017 Revised: April 1, 2019

Revise Article 107.40(b) of the Standard Specifications to read:

- "(b) Compensation. Compensation will not be allowed for delays, inconveniences, or damages sustained by the Contractor from conflicts with facilities not meeting the above definition; or if a conflict with a utility in an unanticipated location does not cause a shutdown of the work or a documentable reduction in the rate of progress exceeding the limits set herein. The provisions of Article 104.03 notwithstanding, compensation for delays caused by a utility in an unanticipated location will be paid according to the provisions of this Article governing minor and major delays or reduced rate of production which are defined as follows.
  - (1) Minor Delay. A minor delay occurs when the work in conflict with the utility in an unanticipated location is completely stopped for more than two hours, but not to exceed two weeks.
  - (2) Major Delay. A major delay occurs when the work in conflict with the utility in an unanticipated location is completely stopped for more than two weeks.
  - (3) Reduced Rate of Production Delay. A reduced rate of production delay occurs when the rate of production on the work in conflict with the utility in an unanticipated location decreases by more than 25 percent and lasts longer than seven calendar days."

Revise Article 107.40(c) of the Standard Specifications to read:

- "(c) Payment. Payment for Minor, Major, and Reduced Rate of Production Delays will be made as follows.
  - (1) Minor Delay. Labor idled which cannot be used on other work will be paid for according to Article 109.04(b)(1) and (2) for the time between start of the delay and the minimum remaining hours in the work shift required by the prevailing practice in the area.

Equipment idled which cannot be used on other work, and which is authorized to standby on the project site by the Engineer, will be paid for according to Article 109.04(b)(4).

(2) Major Delay. Labor will be the same as for a minor delay.

Equipment will be the same as for a minor delay, except Contractor-owned equipment will be limited to two weeks plus the cost of move-out to either the

Contractor's yard or another job and the cost to re-mobilize, whichever is less. Rental equipment may be paid for longer than two weeks provided the Contractor presents adequate support to the Department (including lease agreement) to show retaining equipment on the job is the most economical course to follow and in the public interest.

(3) Reduced Rate of Production Delay. The Contractor will be compensated for the reduced productivity for labor and equipment time in excess of the 25 percent threshold for that portion of the delay in excess of seven calendar days. Determination of compensation will be in accordance with Article 104.02, except labor and material additives will not be permitted.

Payment for escalated material costs, escalated labor costs, extended project overhead, and extended traffic control will be determined according to Article 109.13."

Revise Article 108.04(b) of the Standard Specifications to read:

- "(b) No working day will be charged under the following conditions.
  - (1) When adverse weather prevents work on the controlling item.
  - (2) When job conditions due to recent weather prevent work on the controlling item.
  - (3) When conduct or lack of conduct by the Department or its consultants, representatives, officers, agents, or employees; delay by the Department in making the site available; or delay in furnishing any items required to be furnished to the Contractor by the Department prevents work on the controlling item.
  - (4) When delays caused by utility or railroad adjustments prevent work on the controlling item.
  - (5) When strikes, lock-outs, extraordinary delays in transportation, or inability to procure critical materials prevent work on the controlling item, as long as these delays are not due to any fault of the Contractor.
  - (6) When any condition over which the Contractor has no control prevents work on the controlling item."

Revise Article 109.09(f) of the Standard Specifications to read:

"(f) Basis of Payment. After resolution of a claim in favor of the Contractor, any adjustment in time required for the work will be made according to Section 108. Any adjustment in the costs to be paid will be made for direct labor, direct materials, direct equipment, direct jobsite overhead, direct offsite overhead, and other direct costs allowed by the resolution. Adjustments in costs will not be made for interest charges, loss of anticipated profit, undocumented loss of efficiency, home office overhead and unabsorbed overhead

other than as allowed by Article 109.13, lost opportunity, preparation of claim expenses and other consequential indirect costs regardless of method of calculation.

The above Basis of Payment is an essential element of the contract and the claim cost recovery of the Contractor shall be so limited."

Add the following to Section 109 of the Standard Specifications.

"**109.13 Payment for Contract Delay.** Compensation for escalated material costs, escalated labor costs, extended project overhead, and extended traffic control will be allowed when such costs result from a delay meeting the criteria in the following table.

| Contract Type      | Cause of Delay                                  | Length of Delay   |
|--------------------|---|---|
| Working Days       | Article 108.04(b)(3) or<br>Article 108.04(b)(4) | No working days have been charged for two consecutive weeks.  |
| Completion<br>Date | Article 108.08(b)(1) or<br>Article 108.08(b)(7) | The Contractor has been granted a minimum two week extension of contract time, according to Article 108.08. |

Payment for each of the various costs will be according to the following.

- (a) Escalated Material and/or Labor Costs. When the delay causes work, which would have otherwise been completed, to be done after material and/or labor costs have increased, such increases will be paid. Payment for escalated material costs will be limited to the increased costs substantiated by documentation furnished by the Contractor. Payment for escalated labor costs will be limited to those items in Article 109.04(b)(1) and (2), except the 35 percent and 10 percent additives will not be permitted.
- (b) Extended Project Overhead. For the duration of the delay, payment for extended project overhead will be paid as follows.
  - (1) Direct Jobsite and Offsite Overhead. Payment for documented direct jobsite overhead and documented direct offsite overhead, including onsite supervisory and administrative personnel, will be allowed according to the following table.

| Original Contract<br>Amount               | Supervisory and Administrative<br>Personnel   |
|---|---|
| Up to \$5,000,000                         | One Project Superintendent  |
| Over \$ 5,000,000 -<br>up to \$25,000,000 | One Project Manager,<br>One Project Superintendent or<br>Engineer, and<br>One Clerk |
| Over \$25,000,000 -<br>up to \$50,000,000 | One Project Manager,<br>One Project Superintendent,<br>One Engineer, and            |

|                   | One Clerk  |
|-------------------|--|
| Over \$50,000,000 | One Project Manager,<br>Two Project Superintendents, |
| Over \$30,000,000 | One Engineer, and<br>One Clerk                       |

- (2) Home Office and Unabsorbed Overhead. Payment for home office and unabsorbed overhead will be calculated as 8 percent of the total delay cost.
- (c) Extended Traffic Control. Traffic control required for an extended period of time due to the delay will be paid for according to Article 109.04.

When an extended traffic control adjustment is paid under this provision, an adjusted unit price as provided for in Article 701.20(a) for increase or decrease in the value of work by more than ten percent will not be paid.

Upon payment for a contract delay under this provision, the Contractor shall assign subrogation rights to the Department for the Department's efforts of recovery from any other party for monies paid by the Department as a result of any claim under this provision. The Contractor shall fully cooperate with the Department in its efforts to recover from another party any money paid to the Contractor for delay damages under this provision."

80384

# HOT-MIX ASPHALT (BDE)

Effective: January 1, 2024

Revise the second paragraph of Articles 1030.07(a)(11) and 1030.08(a)(9) of the Standard Specifications to read:

"When establishing the target density, the HMA maximum theoretical specific gravity  $(G_{mm})$  will be based on the running average of four available Department test results for that project. If less than four  $G_{mm}$  test results are available, an average of all available Department test results for that project will be used. The initial  $G_{mm}$  will be the last available Department test result from a QMP project. If there is no available Department test result from a QMP project. If there is no available Department test result from a QMP project. If there is no available Department test result from a QMP project. If there is no available Department test result from a QMP project.

In the Supplemental Specifications, replace the revision for the end of the third paragraph of Article 1030.09(h)(2) with the following:

"When establishing the target density, the HMA maximum theoretical specific gravity  $(G_{mm})$  will be the Department mix design verification test result."

Revise the tenth paragraph of Article 1030.10 of the Standard Specifications to read:

"Production is not required to stop after a test strip has been constructed."

80456

# PERFORMANCE GRADED ASPHALT BINDER (BDE)

Effective: January 1, 2023

Revise Article 1032.05 of the Standard Specifications to read:

"1032.05 Performance Graded Asphalt Binder. These materials will be accepted according to the Bureau of Materials Policy Memorandum, "Performance Graded Asphalt Binder Qualification Procedure." The Department will maintain a qualified producer list. These materials shall be free from water and shall not foam when heated to any temperature below the actual flash point. Air blown asphalt, recycle engine oil bottoms (ReOB), and polyphosphoric acid (PPA) modification shall not be used.

When requested, producers shall provide the Engineer with viscosity/temperature relationships for the performance graded asphalt binders delivered and incorporated in the work.

(a) Performance Graded (PG) Asphalt Binder. The asphalt binder shall meet the requirements of AASHTO M 320, Table 1 "Standard Specification for Performance Graded Asphalt Binder" for the grade shown on the plans and the following.

| Test  | Parameter  |
|---|------------|
| Small Strain Parameter (AASHTO PP 113) BBR, ΔTc,<br>40 hrs PAV (40 hrs continuous or 2 PAV at 20 hrs) | -5 °C min. |

(b) Modified Performance Graded (PG) Asphalt Binder. The asphalt binder shall meet the requirements of AASHTO M 320, Table 1 "Standard Specification for Performance Graded Asphalt Binder" for the grade shown on the plans.

Asphalt binder modification shall be performed at the source, as defined in the Bureau of Materials Policy Memorandum, "Performance Graded Asphalt Binder Qualification Procedure."

Modified asphalt binder shall be safe to handle at asphalt binder production and storage temperatures or HMA construction temperatures. Safety Data Sheets (SDS) shall be provided for all asphalt modifiers.

(1) Polymer Modification (SB/SBS or SBR). Elastomers shall be added to the base asphalt binder to achieve the specified performance grade and shall be either a styrene-butadiene diblock, triblock copolymer without oil extension, or a styrenebutadiene rubber. The polymer modified asphalt binder shall be smooth, homogeneous, and be according to the requirements shown in Table 1 or 2 for the grade shown on the plans.

| Table 1 - Requirements for Styrene-Butadiene Copolymer (SB/SBS)<br>Modified Asphalt Binders   |            |            |
|---|------------|------------|
| Test Asphalt Grade Asph<br>SB/SBS PG 64-28 SB/SB<br>SB/SBS PG 70-22 SB/SB<br>SB/SB<br>SB/SB   |            |            |
| Separation of Polymer<br>ITP, "Separation of Polymer from<br>Asphalt Binder"<br>Difference in °F (°C) of the softening<br>point between top and bottom portions | 4 (2) max. | 4 (2) max. |
|   |            |            |
| TESTS ON RESIDUE FROM ROLLING THIN FILM OVEN TEST (AASHTO T 240)  |            |            |
| Elastic Recovery<br>ASTM D 6084, Procedure A,<br>77 °F (25 °C), 100 mm elongation, %  | 60 min.    | 70 min.    |

| Table 2 - Requirements for Styrene-Butadiene Rubber (SBR)<br>Modified Asphalt Binders   |   |   |
|---|---|---|
| Test  | Asphalt Grade<br>SBR PG 64-28<br>SBR PG 70-22 | Asphalt Grade<br>SB/SBS PG 64-34<br>SB/SBS PG 70-28<br>SBR PG 76-22<br>SBR PG 76-28 |
| Separation of Polymer<br>ITP, "Separation of Polymer from Asphalt<br>Binder"<br>Difference in °F (°C) of the softening<br>point between top and bottom portions | 4 (2) max.                                    | 4 (2) max.  |
| Toughness<br>ASTM D 5801, 77 °F (25 °C),<br>20 in./min. (500 mm/min.), inlbs (N-m)  | 110 (12.5) min.                               | 110 (12.5) min.   |
| Tenacity<br>ASTM D 5801, 77 °F (25 °C),<br>20 in./min. (500 mm/min.), inlbs (N-m)   | 75 (8.5) min.                                 | 75 (8.5) min.   |
| TESTS ON RESIDUE FROM ROLLING THIN FILM OVEN TEST (AASHTO T 240)  |   |   |
| Elastic Recovery<br>ASTM D 6084, Procedure A,<br>77 °F (25 °C), 100 mm elongation, %  | 40 min.                                       | 50 min.   |

(2) Ground Tire Rubber (GTR) Modification. GTR modification is the addition of recycled ground tire rubber to liquid asphalt binder to achieve the specified performance grade. GTR shall be produced from processing automobile and/or truck tires by the ambient

grinding method or micronizing through a cryogenic process. GTR shall not exceed 1/16 in. (2 mm) in any dimension and shall not contain free metal particles, moisture that would cause foaming of the asphalt, or other foreign materials. A mineral powder (such as talc) meeting the requirements of AASHTO M 17 may be added, up to a maximum of four percent by weight of GTR to reduce sticking and caking of the GTR particles. When tested in accordance with Illinois Modified AASHTO T 27 "Standard Method of Test for Sieve Analysis of Fine and Coarse Aggregates" or AASHTO PP 74 "Standard Practice for Determination of Size and Shape of Glass Beads Used in Traffic Markings by Means of Computerized Optical Method", a 50 g sample of the GTR shall conform to the following gradation requirements.

| Sieve Size       | Percent Passing |
|------------------|-----------------|
| No. 16 (1.18 mm) | 100             |
| No. 30 (600 μm)  | 95 ± 5          |
| No. 50 (300 μm)  | > 20            |

GTR modified asphalt binder shall be tested for rotational viscosity according to AASHTO T 316 using spindle S27. GTR modified asphalt binder shall be tested for original dynamic shear and RTFO dynamic shear according to AASHTO T 315 using a gap of 2 mm.

The GTR modified asphalt binder shall meet the requirements of Table 3.

| Table 3 - Requirements for Ground Tire Rubber (GTR)<br>Modified Asphalt Binders      |   |   |
|--|---|---|
| Test   | Asphalt Grade<br>GTR PG 64-28<br>GTR PG 70-22 | Asphalt Grade<br>GTR PG 76-22<br>GTR PG 76-28<br>GTR PG 70-28 |
| TESTS ON RESIDUE FROM ROLLING THIN FILM OVEN TEST (AASHTO T 240)                     |   |   |
| Elastic Recovery<br>ASTM D 6084, Procedure A,<br>77 °F (25 °C), 100 mm elongation, % | 60 min.                                       | 70 min.   |

(3) Softener Modification (SM). Softener modification is the addition of organic compounds, such as engineered flux, bio-oil blends, modified vegetable oils, glycol amines, and fatty acid derivatives, to the base asphalt binder to achieve the specified performance grade. Softeners shall be dissolved, dispersed, or reacted in the asphalt binder to enhance its performance and shall remain compatible with the asphalt binder with no separation. Softeners shall not be added to modified PG asphalt binder as defined in Articles 1032.05(b)(1) or 1032.05(b)(2).

An Attenuated Total Reflectance-Fourier Transform Infrared spectrum (ATR-FTIR) shall be collected for both the softening compound as well as the softener modified

asphalt binder at the dose intended for qualification. The ATR-FTIR spectra shall be collected on unaged softener modified binder, 20-hour Pressurized Aging Vessel (PAV) aged softener modified binder, and 40-hour PAV aged softener modified binder. The ATR-FTIR shall be collected in accordance with Illinois Test Procedure 601. The electronic files spectral files (in one of the following extensions or equivalent: \*.SPA, \*.SPG, \*.IRD, \*.IFG, \*.CSV, \*.SP, \*.IRS, \*.GAML, \*.[0-9], \*.IGM, \*.ABS, \*.DRT, \*.SBM, \*.RAS) shall be submitted to the Central Bureau of Materials.

Softener modified asphalt binders shall meet the requirements in Table 4.

| Table 4 - Requirements for Softener Modified Asphalt Binders |                         |  |
|--|-------------------------|--|
|  | Asphalt Grade           |  |
|  | SM PG 46-28 SM PG 46-34 |  |
| Test   | SM PG 52-28 SM PG 52-34 |  |
|  | SM PG 58-22 SM PG 58-28 |  |
|  | SM PG 64-22             |  |
| Small Strain Parameter (AASHTO PP 113)                       |                         |  |
| BBR, ΔTc, 40 hrs PAV (40 hrs                                 | -5°C min.               |  |
| continuous or 2 PAV at 20 hrs)                               |                         |  |
| Large Strain Parameter (Illinois Modified                    |                         |  |
| AASHTO T 391) DSR/LAS Fatigue                                |                         |  |
| Property, Δ G* peak τ, 40 hrs PAV                            |                         |  |
| (40 hrs continuous or 2 PAV at 20 hrs)                       |                         |  |

The following grades may be specified as tack coats.

| Asphalt Grade                | Use        |
|------------------------------|------------|
| PG 58-22, PG 58-28, PG 64-22 | Tack Coat" |

Revise Article 1031.06(c)(1) and 1031.06(c)(2) of the Standard Specifications to read:

"(1) RAP/RAS. When RAP is used alone or RAP is used in conjunction with RAS, the percentage of virgin ABR shall not exceed the amounts listed in the following table.

| HMA Mixtures - RAP/RAS Maximum ABR % <sup>1/2/</sup> |   |    |   |
|--|---|----|---|
| Ndesign  | NdesignBinderSurfacePolymer ModiBinder or Surface |    | Polymer Modified<br>Binder or Surface <sup>3/</sup> |
| 30   | 30  | 30 | 10  |
| 50   | 25  | 15 | 10  |
| 70   | 15  | 10 | 10  |
| 90   | 10  | 10 | 10  |

1/ For Low ESAL HMA shoulder and stabilized subbase, the RAP/RAS ABR shall not exceed 50 percent of the mixture.

- 2/ When RAP/RAS ABR exceeds 20 percent, the high and low virgin asphalt binder grades shall each be reduced by one grade (i.e. 25 percent ABR would require a virgin asphalt binder grade of PG 64-22 to be reduced to a PG 58-28).
- 3/ The maximum ABR percentages for ground tire rubber (GTR) modified mixes shall be equivalent to the percentages specified for SBS/SBR polymer modified mixes.
- (2) FRAP/RAS. When FRAP is used alone or FRAP is used in conjunction with RAS, the percentage of virgin asphalt binder replacement shall not exceed the amounts listed in the following table.

| HMA Mixtures - FRAP/RAS Maximum ABR % <sup>1/2/</sup> |        |         |   |
|---|--------|---------|---|
| Ndesign   | Binder | Surface | Polymer Modified<br>Binder or Surface <sup>3/</sup> |
| 30  | 55     | 45      | 15  |
| 50  | 45     | 40      | 15  |
| 70  | 45     | 35      | 15  |
| 90  | 45     | 35      | 15  |
| SMA   |        |         | 25  |
| IL-4.75   |        |         | 35  |

- 1/ For Low ESAL HMA shoulder and stabilized subbase, the FRAP/RAS ABR shall not exceed 50 percent of the mixture.
- 2/ When FRAP/RAS ABR exceeds 20 percent for all mixes, the high and low virgin asphalt binder grades shall each be reduced by one grade (i.e. 25 percent ABR would require a virgin asphalt binder grade of PG 64-22 to be reduced to a PG 58-28).
- 3/ The maximum ABR percentages for GTR modified mixes shall be equivalent to the percentages specified for SBS/SBR polymer modified mixes."

Add the following to the end of Note 2 of Article 1030.03 of the Standard Specifications.

"A dedicated storage tank for the ground tire rubber (GTR) modified asphalt binder shall be provided. This tank shall be capable of providing continuous mechanical mixing throughout and/or recirculation of the asphalt binder to provide a uniform mixture. The tank shall be heated and capable of maintaining the temperature of the asphalt binder at 300 °F to 350 °F (149 °C to 177 °C). The asphalt binder metering systems of dryer drum plants shall be calibrated with the actual GTR modified asphalt binder material with an accuracy of  $\pm 0.40$  percent."

80441

## REMOVAL AND DISPOSAL OF REGULATED SUBSTANCES (BDE)

Effective: January 1, 2024 Revised: April 1, 2024

Revise the first paragraph of Article 669.04 of the Standard Specifications to read:

"669.04 Regulated Substances Monitoring. Regulated substances monitoring includes environmental observation and field screening during regulated substances management activities. The excavated soil and groundwater within the work areas shall be managed as either uncontaminated soil, hazardous waste, special waste, or non-special waste.

As part of the regulated substances monitoring, the monitoring personnel shall perform and document the applicable duties listed on form BDE 2732 "Regulated Substances Monitoring Daily Record (RSMDR)"."

Revise the first two sentences of the nineteenth paragraph of Article 669.05 of the Standard Specifications to read:

"The Contractor shall coordinate waste disposal approvals with the disposal facility and provide the specific analytical testing requirements of that facility. The Contractor shall make all arrangements for collection, transportation, and analysis of landfill acceptance testing."

Revise the last paragraph of Article 669.05 of the Standard Specifications to read:

"The Contractor shall select a permitted landfill facility or CCDD/USFO facility meeting the requirements of 35 III. Admin. Code Parts 810-814 or Part 1100, respectively. The Department will review and approve or reject the facility proposed by the Contractor based upon information provided in BDE 2730. The Contractor shall verify whether the selected facility is compliant with those applicable standards as mandated by their permit and whether the facility is presently, has previously been, or has never been, on the United States Environmental Protection Agency (U.S. EPA) National Priorities List or the Resource Conservation and Recovery Act (RCRA) List of Violating Facilities. The use of a Contractor selected facility shall in no manner delay the construction schedule or alter the Contractor's responsibilities as set forth."

Revise the first paragraph of Article 669.07 of the Standard Specifications to read:

"669.07 Temporary Staging. Soil classified according to Articles 669.05(a)(2), (b)(1), or (c) may be temporarily staged at the Contractor's option. All other soil classified according to Articles 669.05(a)(1), (a)(3), (a)(4), (a)(5), (a)(6), or (b)(2) shall be managed and disposed of without temporary staging to the greatest extent practicable. If circumstances beyond the Contractor's control require temporary staging of these latter materials, the Contractor shall request approval from the Engineer in writing.

Topsoil for re-use as final cover which has been field screened and found not to exhibit PID readings over daily background readings as documented on the BDE 2732, visual staining or

odors, and is classified according to Articles 669.05(a)(2), (a)(3), (a)(4), (b)(1), or (c) may be temporarily staged at the Contractor's option."

Add the following paragraph after the sixth paragraph of Article 669.11 of the Standard Specifications.

"The sampling and testing of effluent water derived from dewatering discharges for priority pollutants volatile organic compounds (VOCs), priority pollutants semi-volatile organic compounds (SVOCs), or priority pollutants metals, will be paid for at the contract unit price per each for VOCS GROUNDWATER ANALYSIS using EPA Method 8260B, SVOCS GROUNDWATER ANALYSIS using EPA Method 8270C, or RCRA METALS GROUNDWATER ANALYSIS using EPA Methods 6010B and 7471A. This price shall include transporting the sample from the job site to the laboratory."

Revise the first sentence of the eight paragraph of Article 669.11 of the Standard Specifications to read:

"Payment for temporary staging of soil classified according to Articles 669.05(a)(1), (a)(3), (a)(4), (a)(5), (a)(6), or (b)(2) to be managed and disposed of, if required and approved by the Engineer, will be paid according to Article 109.04."

80455

## VEHICLE AND EQUIPMENT WARNING LIGHTS (BDE)

Effective: November 1, 2021 Revised: November 1, 2022

Add the following paragraph after the first paragraph of Article 701.08 of the Standard Specifications:

"The Contractor shall equip all vehicles and equipment with high-intensity oscillating, rotating, or flashing, amber or amber-and-white, warning lights which are visible from all directions. In accordance with 625 ILCS 5/12-215, the lights may only be in operation while the vehicle or equipment is engaged in construction operations."

80439

### State of Illinois Department of Transportation Bureau of Local Roads and Streets

### SPECIAL PROVISION FOR INSURANCE

Effective: February 1, 2007 Revised: August 1, 2007

All references to Sections or Articles in this specification shall be construed to mean specific Section or Article of the Standard Specifications for Road and Bridge Construction, adopted by the Department of Transportation.

The Contractor shall name the following entities as additional insured under the Contractor's general liability insurance policy in accordance with Article 107.27:

Mackinaw R.D.

Tazewell County Highway Department

The entities listed above and their officers, employees, and agents shall be indemnified and held harmless in accordance with Article 107.26.

### State of Illinois Department of Transportation Bureau of Local Roads and Streets

### SPECIAL PROVISION FOR EQUIPMENT RENTAL RATES

### Effective: January 1, 2012

All references to Sections or Articles in this specification shall be construed to mean a specific Section or Article of the Standard Specifications for Road and Bridge Construction, adopted by the Department of Transportation.

Replace Article 109.04(b)(4) with the following:

"(4) Equipment. For any machinery or special equipment (other than small tools) the use of which has been authorized by the Engineer, the Contractor will be paid according to the latest revision of "SCHEDULE OF AVERAGE ANNUAL EQUIPMENT OWNERSHIP EXPENSE" and latest index factor as issued by the Illinois Department of Transportation. The equipment should be of a type and size reasonably required to complete the extra work."

### State of Illinois DEPARTMENT OF TRANSPORTATION Bureau of Local Roads & Streets SPECIAL PROVISION FOR LOCAL QUALITY ASSURANCE/ QUALITY MANAGEMENT QC/QA Effective: January 1, 2022

Replace the first five paragraphs of Article 1030.06 of the Standard Specifications with the following:

"**1030.06 Quality Management Program.** The Quality Management Program (QMP) will be Quality Control / Quality Assurance (QC/QA) according to the following."

Delete Article 1030.06(d)(1) of the Standard Specifications.

Revise Article 1030.09(g)(3) of the Standard Specifications to read:

"(3) If core testing is the density verification method, the Contractor shall provide personnel and equipment to collect density verification cores for the Engineer. Core locations will be determined by the Engineer following the document "Hot-Mix Asphalt QC/QA Procedure for Determining Random Density Locations" at density verification intervals defined in Article 1030.09(b). After the Engineer identifies a density verification location and prior to opening to traffic, the Contractor shall cut a 4 in. (100 mm) diameter core. With the approval of the Engineer, the cores may be cut at a later time."

Revise Article 1030.09(h)(2) of the Standard Specifications to read:

"(2) After final rolling and prior to paving subsequent lifts, the Engineer will identify the random density verification test locations. Cores or nuclear density gauge testing will be used for density verification. The method used for density verification will be as selected below.

|   | Density Verification Method  |
|---|--|
|   | Cores  |
| X | Nuclear Density Gauge (Correlated when<br>paving ≥ 3,000 tons per mixture) |

Density verification test locations will be determined according to the document "Hot-Mix Asphalt QC/QA Procedure for Determining Random Density Locations". The density testing interval for paving wider than or equal to 3 ft (1 m) will be 0.5 miles (800 m) for lift thicknesses of 3 in. (75 mm) or less and 0.2 miles (320 m) for lift thicknesses greater than 3 in. (75 mm). The density testing interval for paving less than 3 ft (1 m) wide will be 1 mile (1,600 m). If a day's paving will be less than the prescribed density testing interval, the length of the day's paving will be the interval for that day. The density testing interval for mixtures used for patching will be 50 patches with a minimum of one test per mixture per project.

If core testing is the density verification method, the Engineer will witness the Contractor coring, and secure and take possession of all density samples at the

density verification locations. The Engineer will test the cores collected by the Contractor for density according to Illinois Modified AASHTO T 166 or AASHTO T 275.

If nuclear density gauge testing is the density verification method, the Engineer will conduct nuclear density gauge tests. The Engineer will follow the density testing procedure detailed in the document "Illinois Modified ASTM D 2950, Standard Test Method for Density of Bituminous Concrete In-Place by Nuclear Method".

A density verification test will be the result of a single core or the average of the nuclear density tests at one location. The results of each density test must be within acceptable limits. The Engineer will promptly notify the Contractor of observed deficiencies."

Revise the seventh paragraph and all subsequent paragraphs in Section D. of the document "Hot-Mix Asphalt QC/QA Initial Daily Plant and Random Samples" to read:

"Mixtures shall be sampled from the truck at the plant by the Contractor following the same procedure used to collect QC mixture samples (Section A). This process will be witnessed by the Engineer who will take custody of the verification sample. Each sample bag with a verification mixture sample will be secured by the Engineer using a locking ID tag. Sample boxes containing the verification mixture sample will be sealed/taped by the Engineer using a security ID label."

### State of Illinois DEPARTMENT OF TRANSPORTATION Bureau of Local Roads & Streets

### SPECIAL PROVISION FOR EMULSIFIED ASPHALTS

Effective: January 1, 2007 Revised: February 7, 2008

All references to Sections and Articles in this Special Provision shall be construed to mean specific Sections and Articles in the Standard Specifications for Road and Bridge Construction adopted by the Department of Transportation.

Replace the table after Note 2 in Article 403.02 with the following:

|                                | Bituminous Materials Recommended for Weather Conditions Indicated                                     |  |  |  |  |  |  |  |
|--------------------------------|---|--|--|--|--|--|--|--|
| Type of<br>Construction        | Warm<br>[15 °C to 30 °C]*<br>[(60 °F to 85 °F)]*  | Hot<br>[30 °C Plus]*<br>[(85 °F Plus)]*  |  |  |  |  |  |  |
| Prime                          | MC-30, PEP  | MC-30, PEP   |  |  |  |  |  |  |
| Cover Coat<br>and Seal<br>Coat | RS-2, CRS-2, RC-800, RC-3000,<br>MC-800, MC-3000, SC-3000, HFE-90,<br>HFE-150, HFE-300, HFRS-2, PEA** | RS-2, CRS-2, RC-800, RC-3000,<br>MC-800, MC-3000, SC-3000, PG46-28,<br>PG52-28, HFE-90, HFE-150, HFE-300,<br>HFRS-2, PEA** |  |  |  |  |  |  |

\* Temperature of the air in the shade at the time of application.

\*\* PEA is only allowed on roads with low traffic volumes

Replace the table after Note 2 in Article 406.02 with the following:

| Type of Construction   | Bituminous Materials Recommended          |
|--|---|
| Prime (tack) on Brick, Concrete, or Bituminous<br>Bases (Note 3) | SS-1, SS-1h, CSS-1, CSS-1h, HFE-90, RC-70 |
| Prime on Aggregate Bases (Note 4)                                | MC-30, PEP                                |
| Mixture for Cracks, Joints, and Flangeways                       | PG58-22, PG64-22                          |

- Note 3. When emulsified asphalts are used, they shall be diluted with an equal volume of potable water. HFE emulsions shall be diluted by the manufacturer. The diluted material shall be thoroughly agitated within 24 hours of application and show no separation of water and emulsion. The diluted material shall not be returned to an approved emulsion storage tank.
- Note 4. Preparation of the bituminous PEP shall be as specified in Article 403.05.

Replace the table in Article 1032.04 with the following:

| Spr                                      | aying Application Temperature Ra | anges     |  |  |  |
|--|----------------------------------|-----------|--|--|--|
| Turne and Grade of                       | Temperature Ranges               |           |  |  |  |
| Type and Grade of<br>Bituminous Material | °F                               | O°        |  |  |  |
| Biturninous Materiai                     | min max.                         | min max.  |  |  |  |
| PEP                                      | 60 - 130                         | 15 - 55   |  |  |  |
| PEA                                      | 140 - 190                        | 60 -88    |  |  |  |
| MC-30                                    | 85 - 190                         | 30 - 90   |  |  |  |
| MC-70, RC-70, SC-70                      | 120 - 225                        | 50 - 105  |  |  |  |
| MC-250, SC-250                           | 165 - 270                        | 75 - 130  |  |  |  |
| MC-800, SC-800                           | 200 - 305                        | 95 - 150  |  |  |  |
| MC-3000, SC-3000                         | 230 - 345                        | 110 - 175 |  |  |  |
| PG46-28                                  | 275 - 385                        | 135 - 195 |  |  |  |
| PG52-28                                  | 285 - 395                        | 140 - 200 |  |  |  |
| RS-2, CRS-2                              | 110 - 160                        | 45 - 70   |  |  |  |
| SS-1, SS-1h, CSS-1, CSS-1h               | 75 - 130                         | 25 - 55   |  |  |  |
| SS-1hP, CSS-1hP                          | 75 - 130                         | 25 - 55   |  |  |  |
| HFE-90, HFE-150, HFE-300                 | 150 - 180                        | 65 - 80   |  |  |  |
| HFP, CRSP, HFRS-2                        | 150 - 180                        | 65 - 80   |  |  |  |
| E-2                                      | 85 - 190                         | 30 - 90   |  |  |  |
| E-3                                      | 120 - 225                        | 50 - 105  |  |  |  |
| E-4                                      | 165 - 270                        | 75 - 130  |  |  |  |

Add subparagraph (g) to Article 1032.06:

(g) Penetrating Emulsified Asphalt (PEA). The penetrating emulsified asphalt shall meet the following requirements when tested according to AASHTO T59:


| Viscosity, Saybolt Fural @ 25°C (77°F),                 | sec: | 20 - 500                |
|---|------|-------------------------|
| Sieve Test, retained on 850 µm (No. 20) sieve, maximum, | %:   | 0.10                    |
| Storage Stability Test, 1 day, maximum,                 | %:   | 1                       |
| Float Test @ 60°C (140°F), minimum,                     | sec: | 150                     |
| Stone Coating Test, 3 minutes,                          | :    | Stone Coated Thoroughly |
| Particle Charge   | :    | Negative                |
| pH, minimum   | :    | 7.3                     |
| Distillation Test:                                      |      |                         |
| Distillation to 260°C (500°F) Residue, minimum          | %:   | 65                      |
| Oil Distillate by Volume, maximum                       | %:   | 3                       |
| Test on residue from distillation:                      |      |                         |
| Penetration @ 25°C (77°F), 100 g, 5 sec, minimum        | dmm: | 300                     |

Replace the last sentence and table of Article 1032.06 with the following:

The different grades are, in general, used for the following.

| Grade  | Use                                |
|--|------------------------------------|
| SS-1, SS-1h, CSS-1, CSS-1h, HFE 90,<br>SS-1hP, CSS-1hP           | Tack or fog seal                   |
| PEP  | Bituminous surface treatment prime |
| RS-2, HFE 90, HFE 150, HFE 300,<br>CRSP, HFP, CRS-2, HFRS-2, PEA | Bituminous surface treatment       |
| CSS-1h Latex Modified  | Microsurfacing                     |


## MACKINAW ROAD DISTRICT TWP. 24N, R 2W, 3rd P.M. 24-12000-01-GM

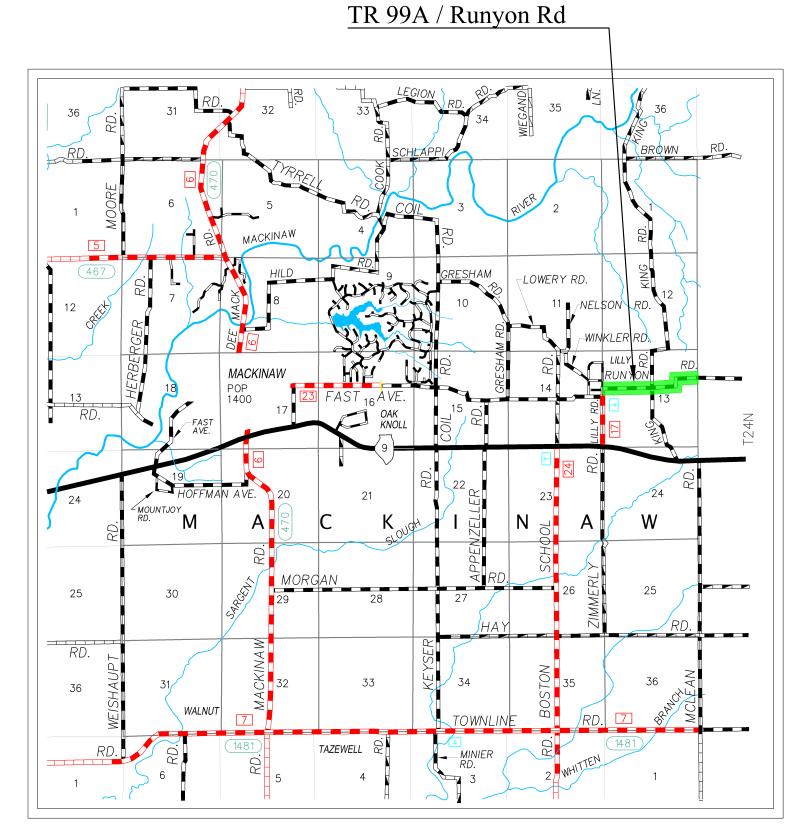

## QUANTITIES

| <b>Overlay</b><br><u>Route/Section</u><br>Runyon Rd / TR99A<br>**Includes Radii                  | <u>Length (ft)</u><br><u>5,343</u> | <u>Width (ft)</u><br>21 | <u>Area (SY)</u><br><u>12,311</u> |       |
|--|------------------------------------|-------------------------|-----------------------------------|-------|
| <u>Hot-Mix Asphalt Surface Removal-</u><br>50' Each End<br>10' King Rd North                     | <u>Butt Joint:</u>                 |                         | 517                               | SQ YD |
| <u>Temporary Ramp:</u><br>20'x4' Each End<br>20'x4' King Rd North                                |                                    |                         | 41                                | SQ YD |
| <b>Polymerized Bituminous Materials</b><br>Rate = 0.72 lbs/SY on Existing Surfac                 |                                    |                         | 18,243                            | POUND |
| Hot-Mix Asphalt Binder Course, IL-9<br>12,311 SQ YD x 112# x 1" / 2000                           | <u>9.5, N50:</u>                   |                         | 689                               | TON   |
| Hot-Mix Asphalt Surface Course, IL<br>12,311 SQ YD x 112# x 1.5" / 2000                          | <u>-9.5, Mix "C", N50:</u>         |                         | 1,034                             | TON   |
| Incidental Hot-Mix Asphalt Surfacir<br>357 SQ YD x 112# x 2.5" / 2000<br>**King Rd Intersections | <u>ופ</u>                          |                         | 50                                | TON   |
| Traffic Control and Protection, (Spe   | <u>ecial)</u>                      |                         | 1                                 | L SUM |

# TYPICAL CROSS SECTION TR 99A / RUNYON RD.

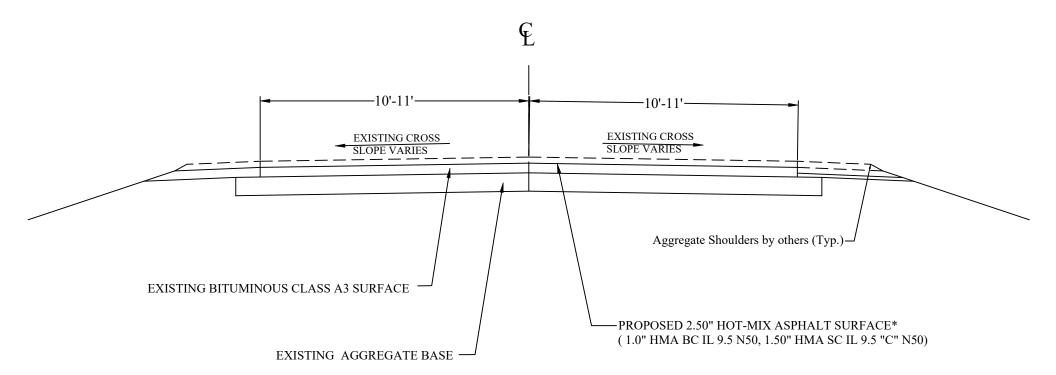


| Location:                                   | TR 99A / Runyo | n Rd           |
|---|----------------|----------------|
| Mixture Uses:                               | Binder Course  | Surface Course |
| PG:   | PG 58-28       | PG 58-28       |
| Design Air Voids:                           | 4.0 @ N50      | 4.0 @ N50      |
| Mixture Composition:<br>(Gradation Mixture) | IL 9.5         | IL 9.5         |
| Friction Aggregate:                         | N/A            | Mixture C      |


Section: 24-12000-01-GM Route: TR 99A / Runyon Rd. Lilly Rd easterly to County Line

## MACKINAW R.D. SEC. 24-12000-01-GM

## STANDARD FOR HOT-MIX ASPHALT SURFACING AT SIDEROADS, ENTRANCES AND MAILBOXES

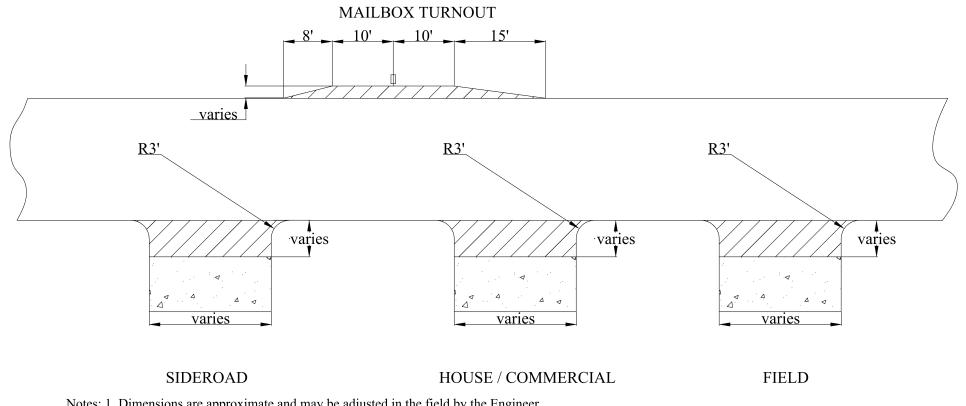


Notes: 1. Dimensions are approximate and may be adjusted in the field by the Engineer

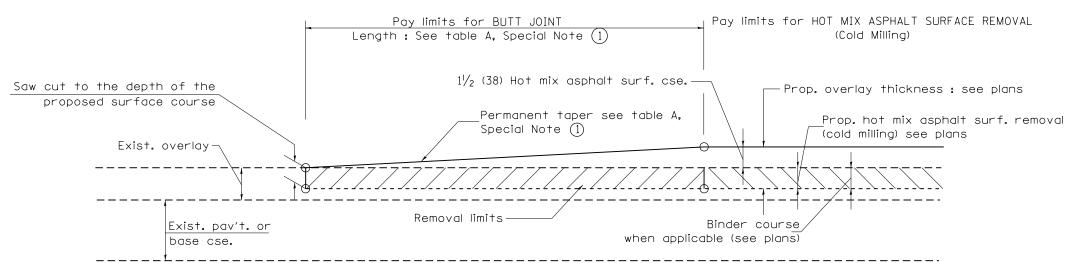

### CASE 1 : WITH HOT MIX ASPHALT SURFACE REMOVAL (COLD MILLING)

|              | I              | AFER RAIES             |        |   |
|--------------|----------------|------------------------|--------|---|
| SPECIAL NOTE | ELEMENT        | MAINLINE INTERSTATES & | ALL    | 1 |
| NUMBER       |                | 4-LANE EXPRESSWAYS     | OTHERS |   |
|              | BUTT JOINT     | 1:480                  | 1:240  | 2 |
|              | TAPER RATE     |                        |        |   |
| 2            | TEMPORARY RAMP | 1:80                   | 1:40   |   |
|              | TAPER RATE     |                        |        | 3 |

TABLE A TAPER RATES

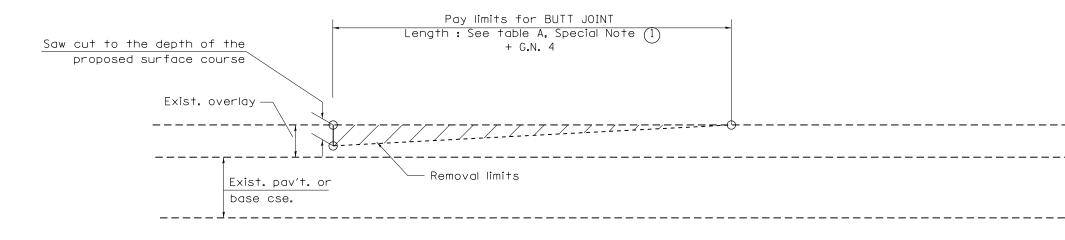

CASE 2 : NO HOT MIX ASPHALT SURFACE REMOVAL (COLD MILLING)

| 01-01-97 | RENUM. C-23.01, NEW REVISION BOX | T.P.   | 08-21-13 | MAJOR MODIFICATIONS              | R.D. |                              |              |
|----------|----------------------------------|--------|----------|----------------------------------|------|------------------------------|--------------|
| 04-01-97 | CORRECTION TO DEPTH              | J.A.   | 04-12-16 | MINOR CORRECTIONS                | R.D. | STATE OF ILLINOIS            | BUTT JOINTS  |
| 09-15-05 | REVISED DESIGNER NOTE            | M.M.A. | 02-14-17 | ADDED NOTE 5                     | R.D. | DEPARTMENT OF TRANSPORTATION |              |
| 10-16-06 | REVISED TO 2007 SPEC.            | M.A.   | 07-16-19 | Wording and Spelling corrections | R.D. | Page 29                      | NOT TO SCALE |
|          |                                  |        |          |                                  |      | •                            |              |

### GENERAL NOTES

1. The work shall be done in accordance with Article 406.08 and the Special Provision for Butt Joints.

2. The pavement surface to be removed may be either bituminous or P.C. concrete. The work shall be performed in accordance with Article 440.04 and the Special Provisions for Butt Joints.


3. The saw cut joints shall be primed just prior to the placing of bituminous material. The work will be in accordance with the applicable portions of Article 406.05.

4. The length of butt joint is based on the taper rate times change in cold milling depth within the butt joint pay limits, unless otherwise indicated.


5. Temporary ramps are paid for separately and not included in the cost of the butt joints.

## All dimensions are in inches (millimeters) unless otherwise noted.

|                     | F.A.<br>RTE. | SEC           | LION            | COUNTY     | TOTAL<br>SHEETS | SHEET<br>NO. |
|---------------------|--------------|---------------|-----------------|------------|-----------------|--------------|
| TS                  |              |               |                 |            |                 |              |
| SHT. 1 OF 3         |              |               |                 | CONTRACT   | NO.             |              |
| CADD STD. 406101-D4 | FED. RO      | DAD DIST. NO. | ILLINOIS FED. A | ID PROJECT |                 |              |

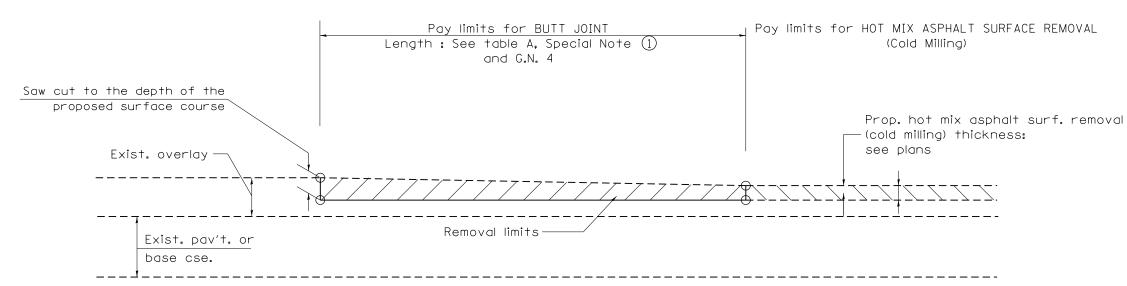


## CASE 3 : HOT MIX ASPHALT SURFACE REMOVAL (COLD MILLING) TIE-IN TO EXISTING BITUMINOUS TAPER

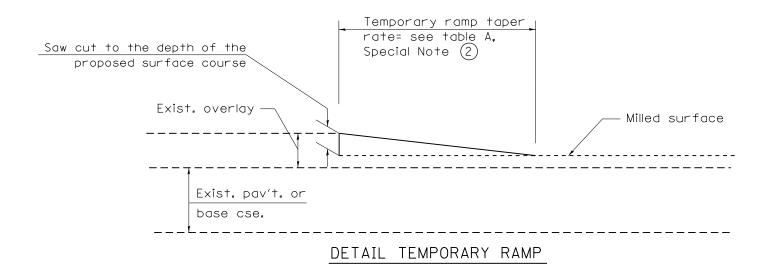

|  |                              |              | F.A. SECTION                                     | COUNTY TOTAL SHEE |
|--|------------------------------|--------------|--|-------------------|
|  | STATE OF ILLINOIS            | BUTT JOINTS  | RIE. SECTION                                     | SHEETS NO.        |
|  | DEPARTMENT OF TRANSPORTATION |              | SHT. 2 OF 3                                      | CONTRACT NO.      |
|  | Page 30                      | NOT TO SCALE | CADD STD. 406101-D4 FED. ROAD DIST. NO. ILLINOIS | FED. AID PROJECT  |

## All dimensions are in inches (millimeters) unless otherwise noted.

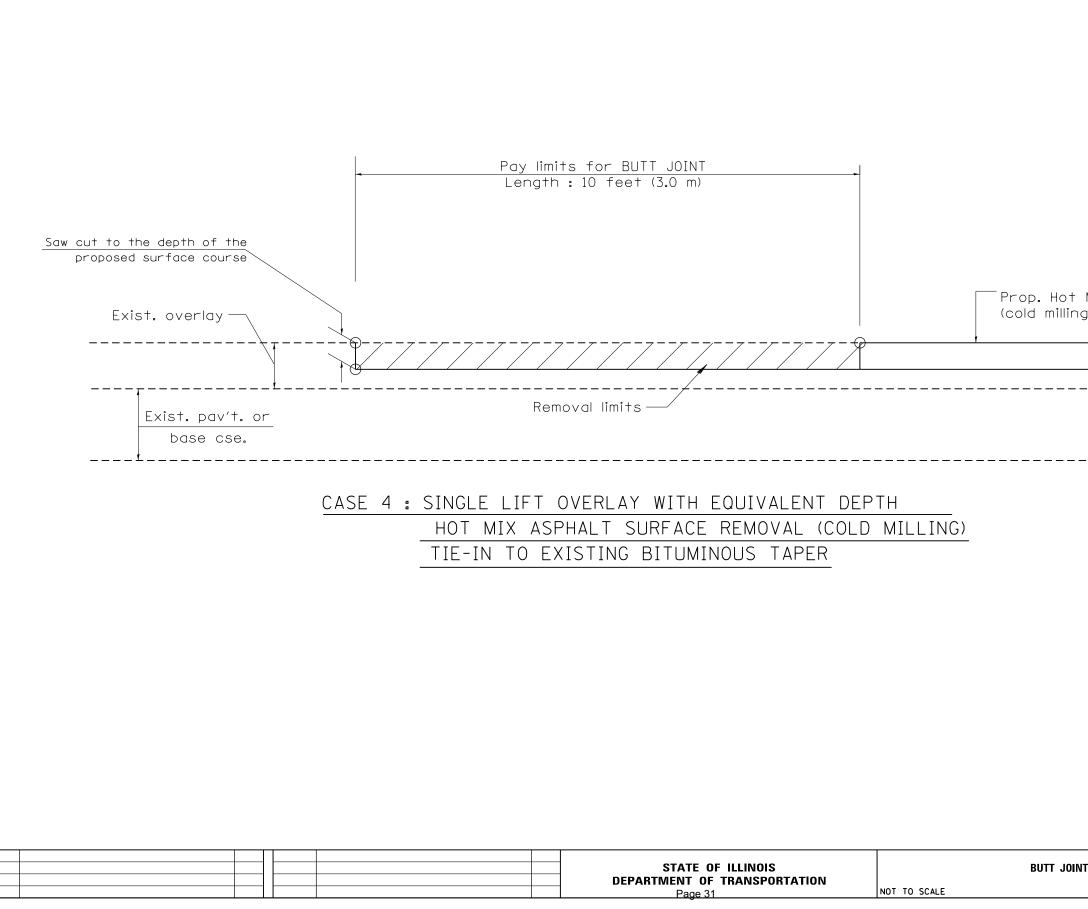


Prop. Hot Mix Asphalt surf. removal (cold milling) per plans.

\_\_\_\_\_

\_\_\_\_\_


## All dimensions are in inches (millimeters) unless otherwise noted.

|     |         |                | F.A.<br>RTE. |             | SEC | TION            | COUNTY     | TOTAL<br>SHEETS | SHEET<br>NO. |
|-----|---------|----------------|--------------|-------------|-----|-----------------|------------|-----------------|--------------|
| NTS |         |                |              |             |     |                 |            |                 |              |
|     | C 4 D D | SHT. 3 OF 3    |              |             |     |                 | CONTRACT   | NO.             |              |
|     | CADD    | STD. 406101-D4 | FED. RO      | DAD DIST. N | 10. | ILLINOIS FED. A | ID PROJECT |                 |              |

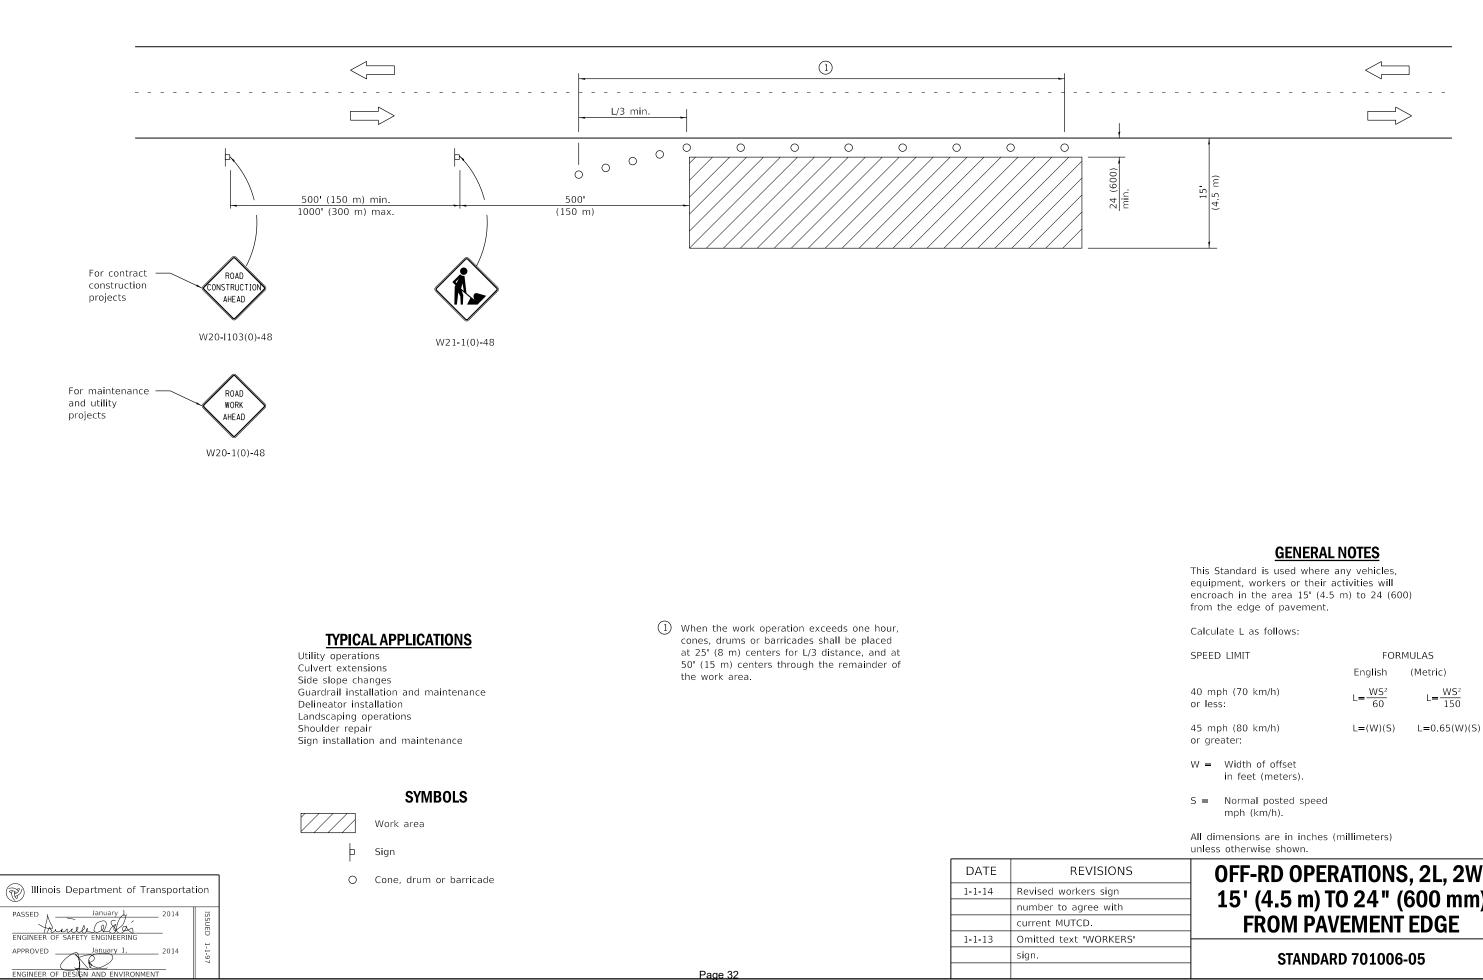


| IONS   |  |
|--------|--|
| sign   |  |
| with   |  |
|        |  |
| RKERS' |  |
|        |  |

## **OFF-RD OPERATIONS, 2L, 2W,** 15' (4.5 m) TO 24" (600 mm) **FROM PAVEMENT EDGE**

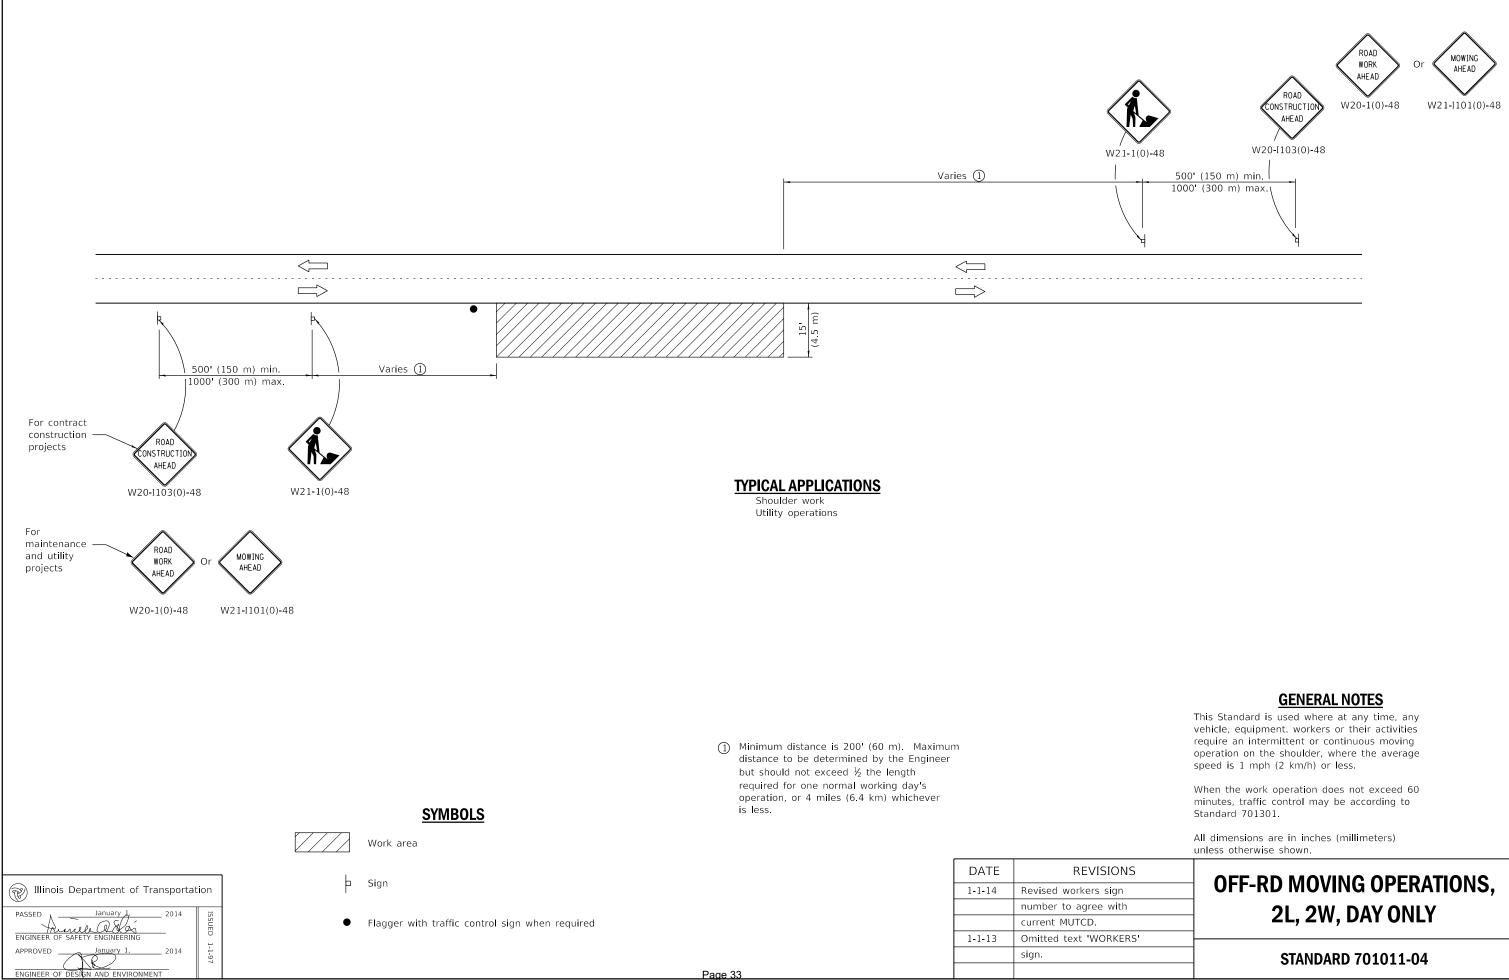


| SIONS  |                                  |
|--------|----------------------------------|
| sign   | <b>OFF-RD MOVING OPERATIONS,</b> |
| with   | 2L, 2W, DAY ONLY                 |
|        | ZL, ZW, DAT UNLT                 |
| RKERS' |                                  |
|        | STANDARD 701011-04               |
|        |                                  |
|        |                                  |

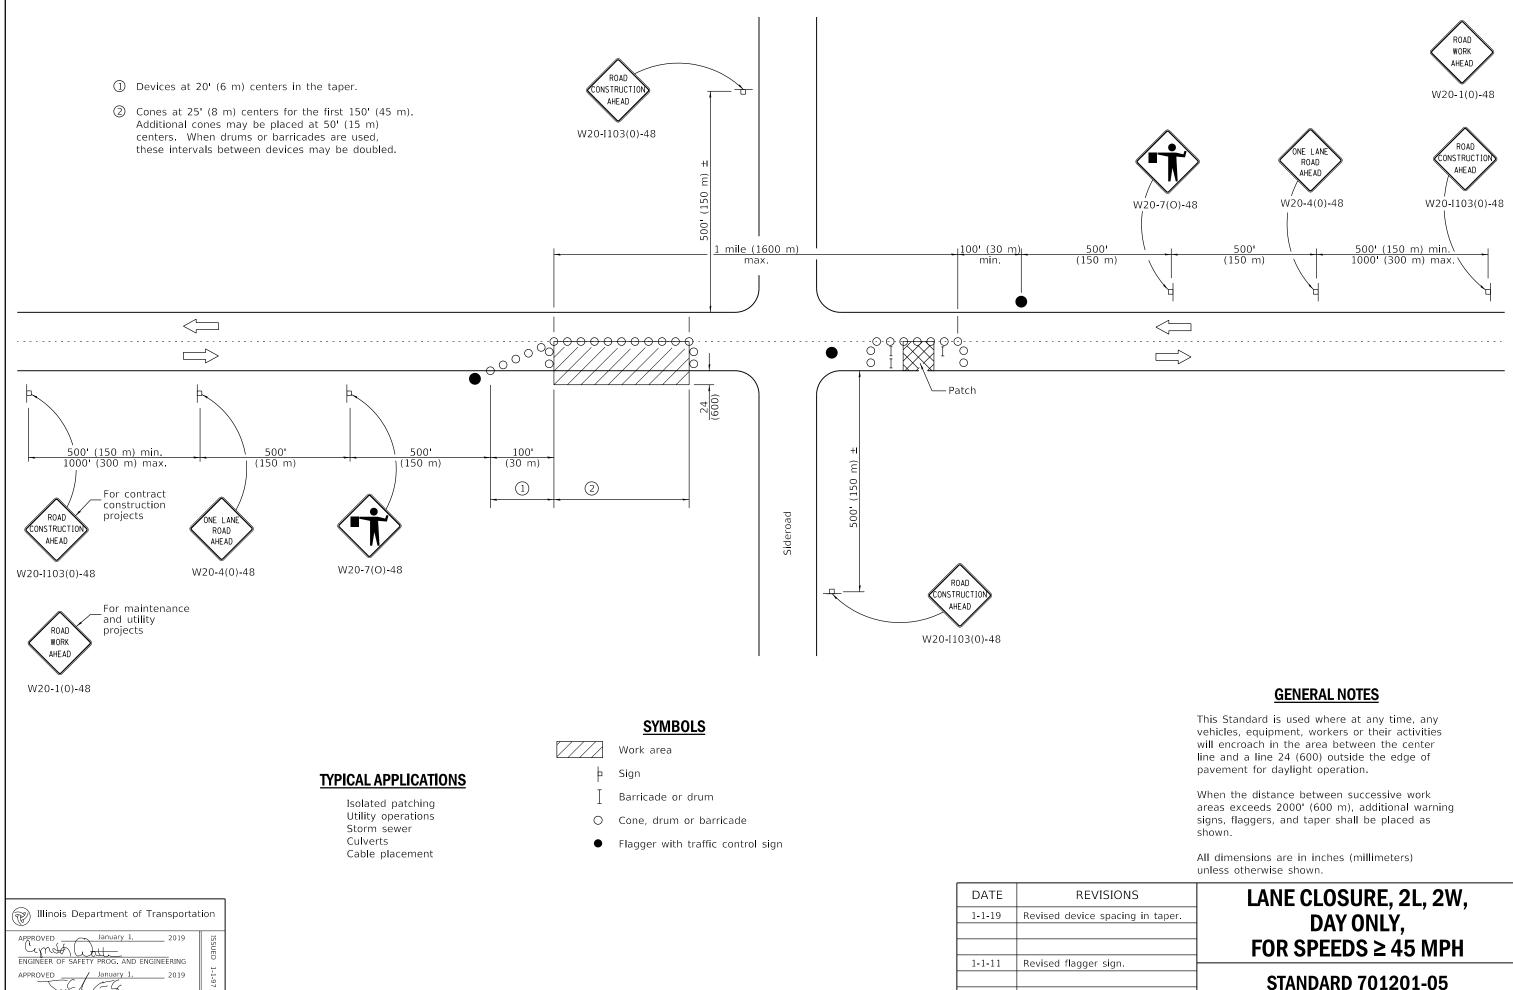


Page 34


| IONS            |  |  |  |  |  |
|-----------------|--|--|--|--|--|
| acing in taper. |  |  |  |  |  |
|                 |  |  |  |  |  |
|                 |  |  |  |  |  |
| gn.             |  |  |  |  |  |
|                 |  |  |  |  |  |
|                 |  |  |  |  |  |

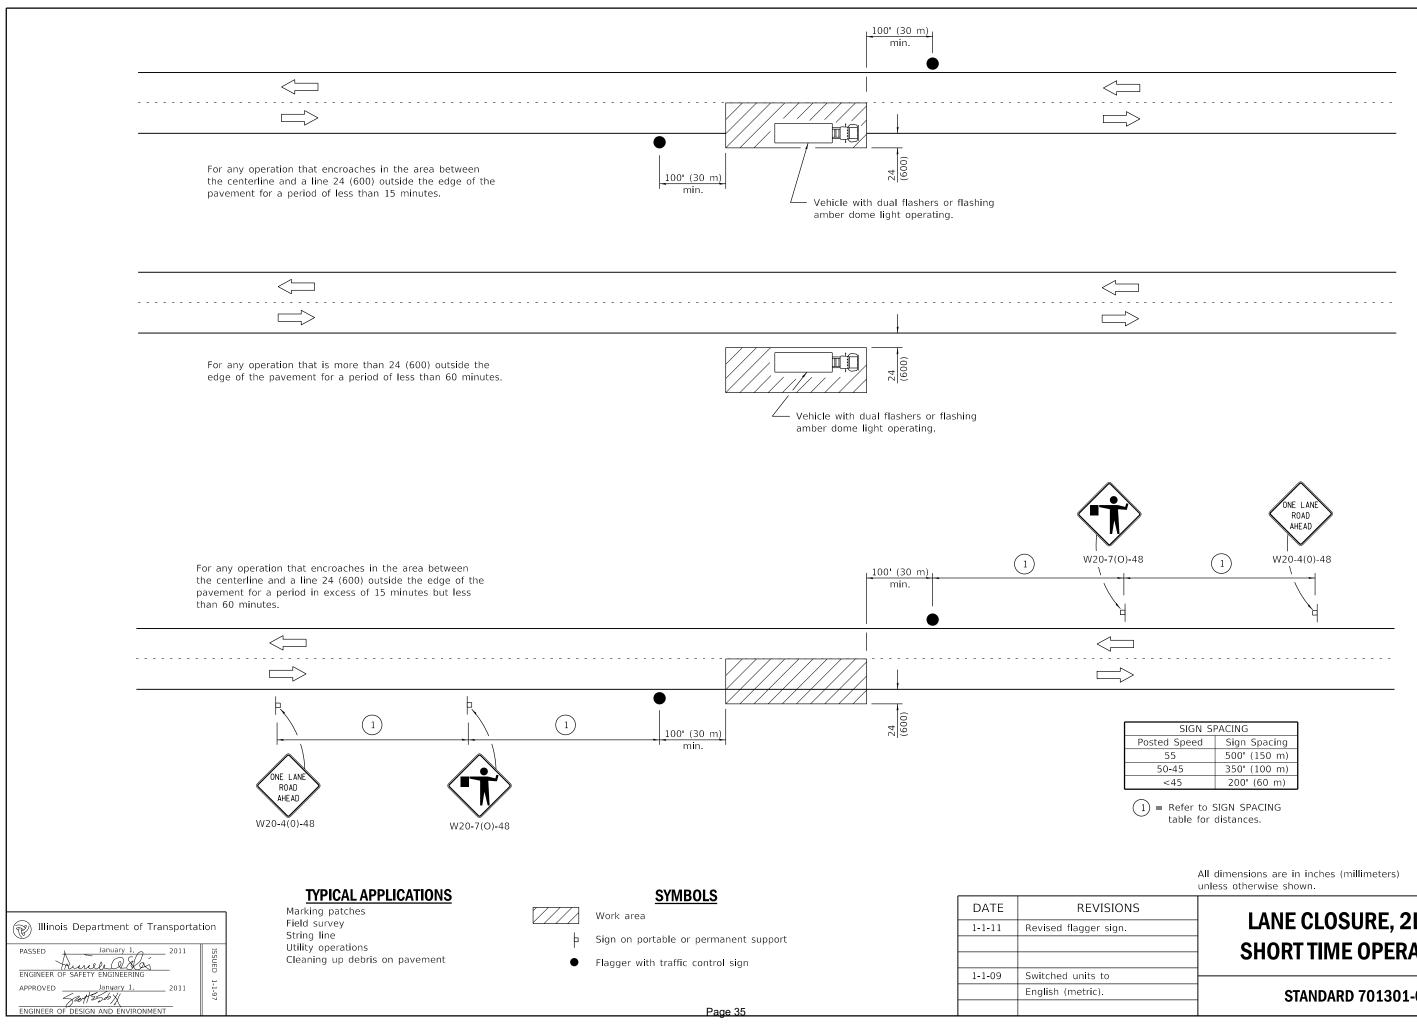


## LANE CLOSURE, 2L, 2W, **SHORT TIME OPERATIONS**

STANDARD 701301-04

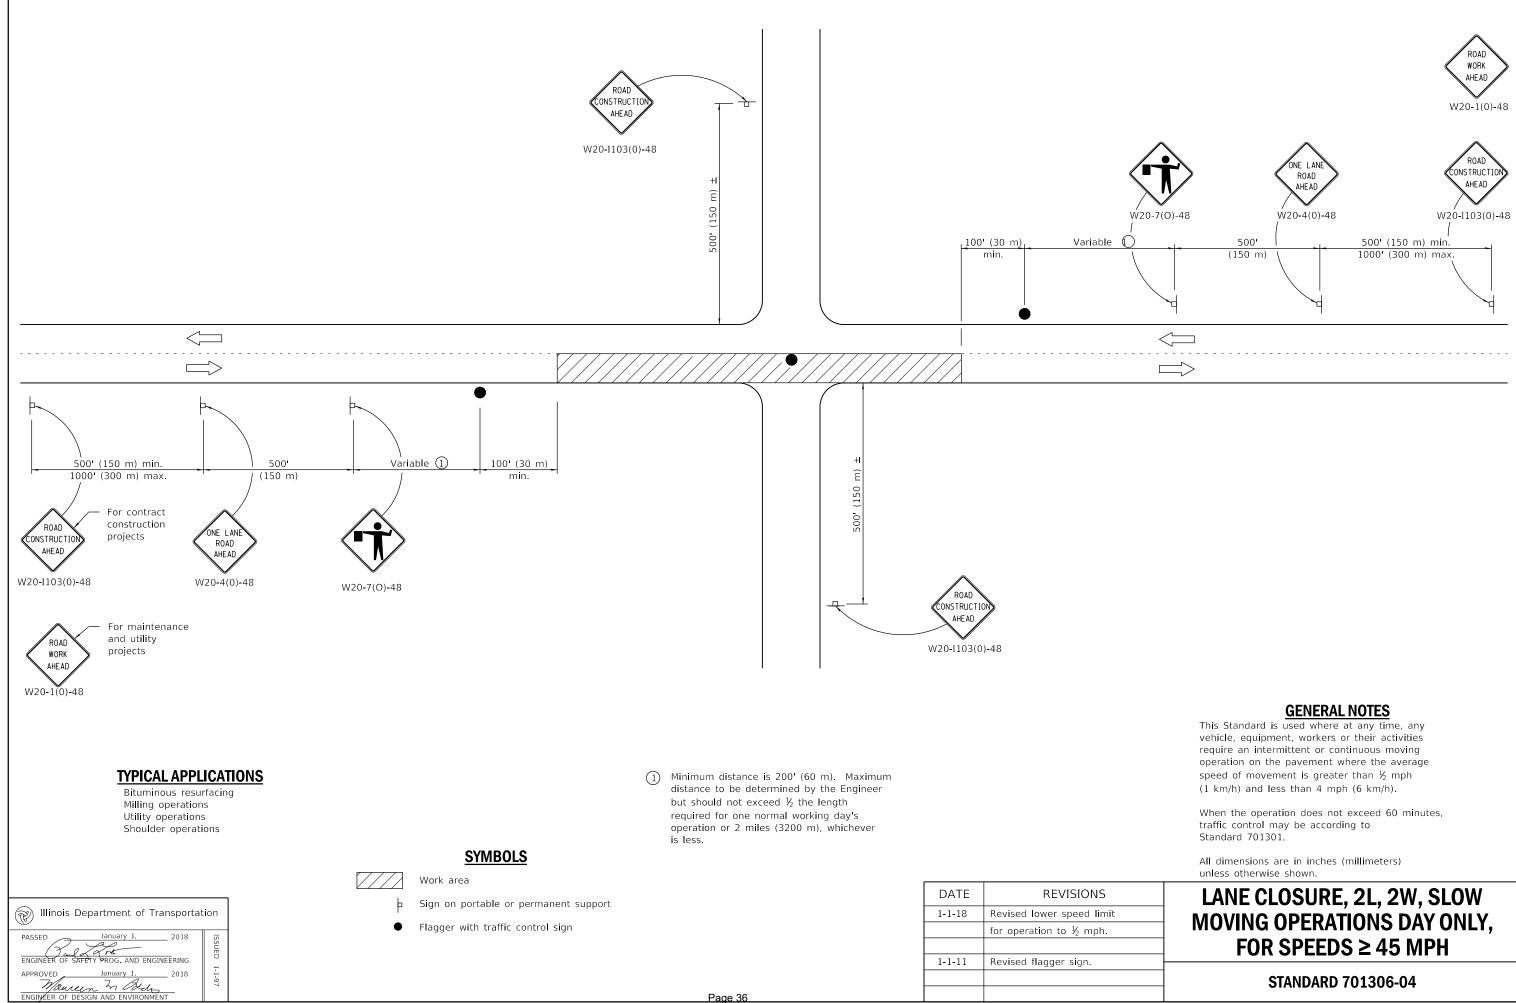

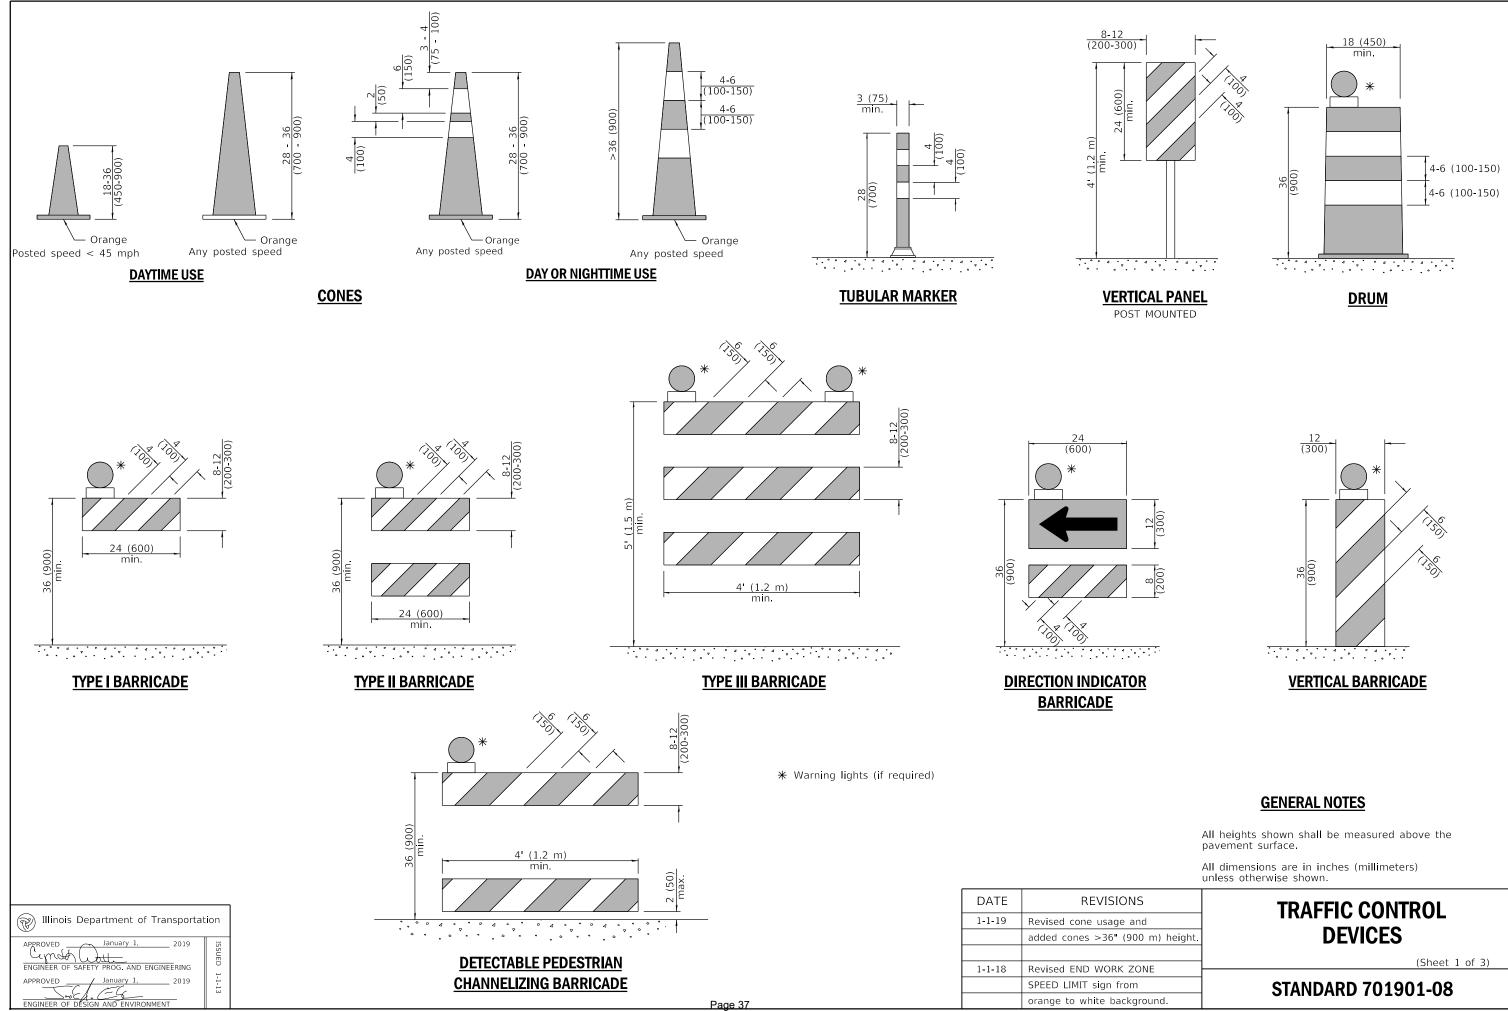

| SIONS             |
|-------------------|
| ge and            |
| " (900 m) height. |
|                   |
| rk zone           |
| from              |
| background.       |

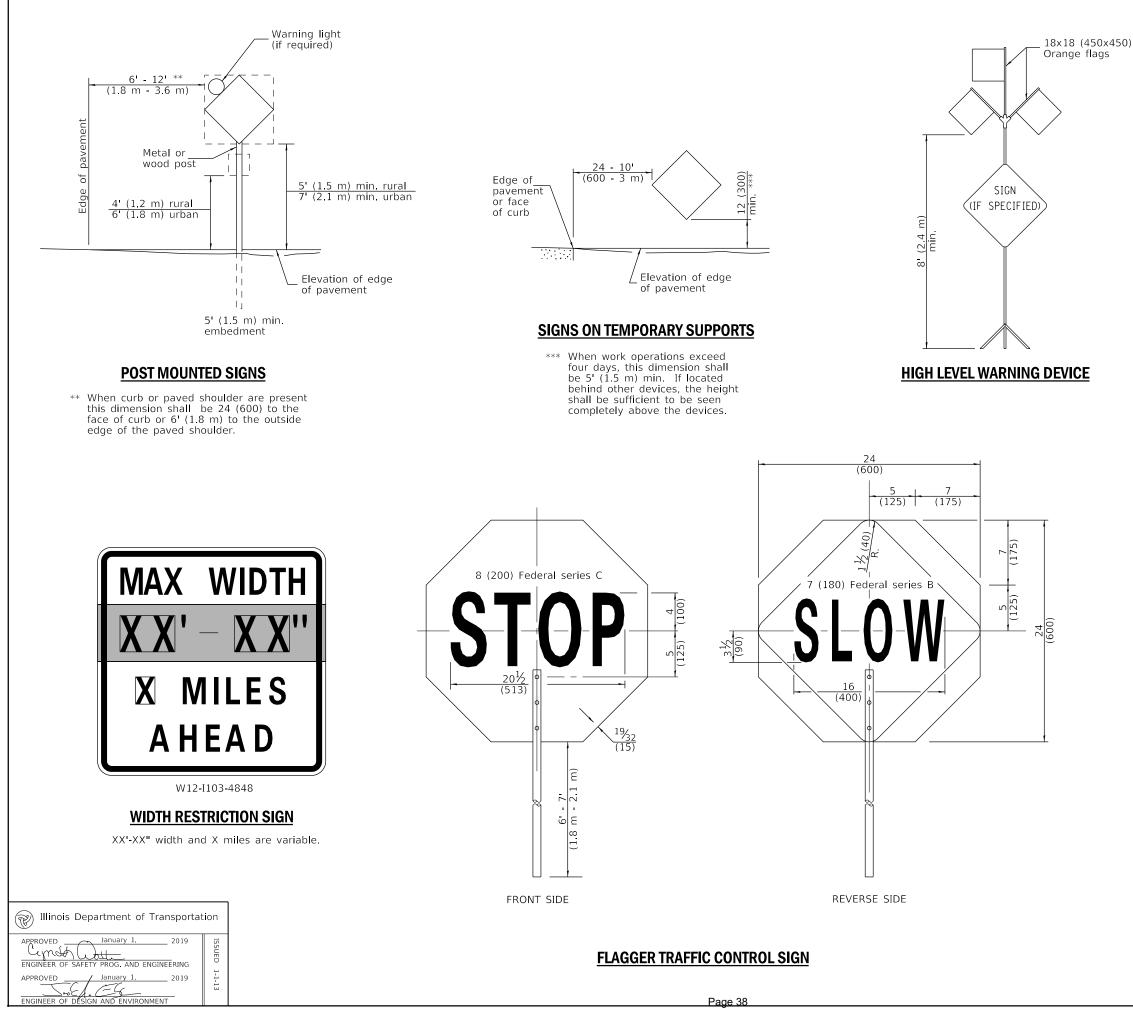





G20-I104(0)-6036

G20-I105(0)-6024


This signing is required for all projects 2 miles (3200 m) or more in length.

ROAD CONSTRUCTION NEXT X MILES sign shall be placed 500' (150 m) in advance of project limits.

END CONSTRUCTION sign shall be erected at the end of the job unless another job is within 2 miles (3200 m).

Dual sign displays shall be utilized on multilane highways.

## WORK LIMIT SIGNING



Sign assembly as shown on Standards or as allowed by District Operations.



G20-I103-6036

This sign shall be used when the above sign assembly is used.

### **HIGHWAY CONSTRUCTION SPEED ZONE SIGNS**

\*\*\*\* R10-I108p shall only be used along roadways under the juristiction of the State.

## **TRAFFIC CONTROL DEVICES**

(Sheet 2 of 3)

## STANDARD 701901-08

